



ACORN USER

BBC micro and Atom magazine

April 1983 £1

PRINTERS: layman's guide


BBC: Bach's music

DISCS: how fast?

ATOM: software reviews

BBC: interfacing

BCPL: new language

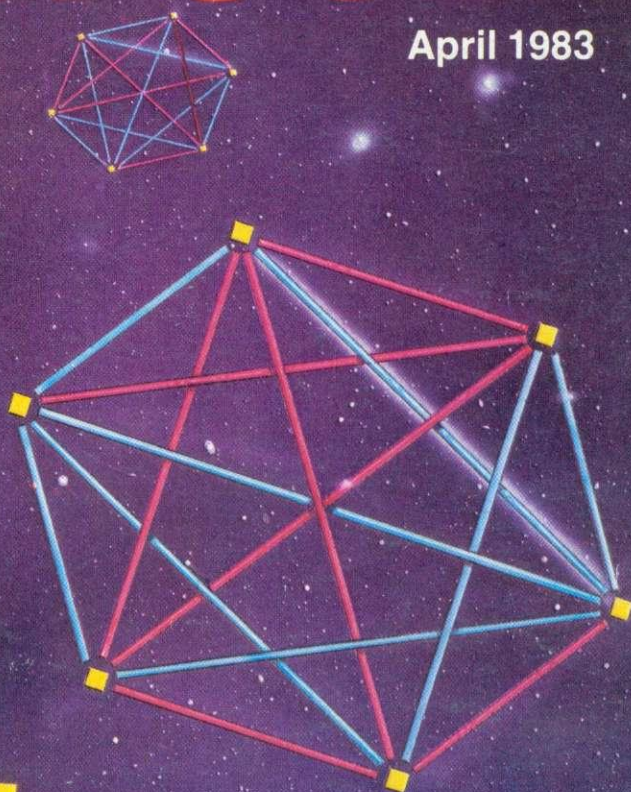

HEXANGLE
game for the
BBC micro



SPECIAL OFFER ON BINDERS

96
pages

YES IS OUR STOCK ANSWER -



LM
LEASLINK VIEWDATA
LIMITED

FOR ALL YOUR BBC NEEDS

***BBC & ACORNSOFT SOFTWARE * BBC BUGGY * DISC DRIVES
* PRINTERS * JOYSTICKS * MONITORS * BOOKS AND MANUALS
* GAMES AND PUZZLES * SERVICE * ADVICE**

BEST FOR USERS

Acorn and BBC users will find everything they want—and we mean everything—at our Nottingham retail store. For instance we have just been appointed distributors of the BBC Buggy, the clever little mobile featured in the television series "Making the Most of Your Micro" and BBC software. Don't worry if you can't get to Nottingham. Just send us a SAE and we will send you a list of dealers, and details of our mail order stock.

NEW! 200K DISK DRIVES

Upgrade your BBC Micro with our new 200K dual disk drive. Designed to fill the gap between the Acorn 100K and 800K disc drives, our 200K unit has already won rave reviews and it's ready now. It costs £389.00 plus £110.25 for the operating system. To order fill in the coupon below.

BEST FOR DEALERS

As Acorn's only official distributors we can supply anything you want, as soon as you want it.

Ordering Acorn and BBC products through us means quick and efficient service. We are prompt, reliable and offer excellent service back-up.

You will like our credit terms as well.

We can get you any Acorn or BBC product without fuss and by using the official distribution channel you can be sure of a completely safe delivery service.

If you are thinking about becoming an Acorn/BBC dealer talk to us now.

We have just been appointed UK distributor for BBC Software and the BBC Buggy.

COMING SOON - 'E' DAY!

Yes it's almost here, the Acorn Electron, the microcomputer the whole industry's talking about.

If you are an Acorn/BBC dealer then you will want to be the first when the Electron is launched.

Through us you will guarantee enough Electrons to keep your customers fully satisfied from day one—and keep you one step ahead of your competitors.

Leasalink Viewdata Software are the sole distributors for the Logical program shown on BBC TV as well as Spreadsheet.

LM
LEASLINK VIEWDATA
LIMITED

Scientific House, Bridge Street, Sandiacre, Nottingham NG10 5BA Tel: 0602 394000

To: Leasalink Viewdata Ltd Scientific House, Bridge Street, Sandiacre, Nottingham NG10 5BA

Please send me

_____ 200K Dual Disc Drive(s) @ £389.00 (inc VAT)

_____ Operating System(s) @ £110.25 (inc VAT) Current Price List Only* ☐ FREE

I enclose a Cheque For: £_____ Please Debit My Access/Barclaycard/Amex

No _____

Name: _____

Address: _____

Post Code: _____

Day time Tel No: _____

*Please enclose s.a.e. Allow 28 days for delivery.

WATFORD ELECTRONICS

DEPT BBC, CARDIFF ROAD, WATFORD, Herts, England
Tel Watford (0923) 40588. Telex: 8956095

MAIL ORDER AND RETAIL SHOP. TRADE AND EXPORT INQUIRIES WELCOME. GOVERNMENT AND EDUCATIONAL ESTABLISHMENTS OFFICIAL ORDERS ACCEPTED. Carriage: unless stated otherwise, please add min. 50p to all cash orders. **VAT** APPLICABLE TO UK CUSTOMERS ONLY. ALL PRICES EXCLUSIVE OF VAT. PLEASE ADD 15% VAT TO THE TOTAL COST INCLUDING POSTAGE. SHOP HOURS: 9.00am TO 5.00pm MONDAY TO SATURDAY. AMPLE FREE CAR PARKING. ACCESS ORDERS: Simply telephone through your order on Watford 50234/40589.

BBC MICROCOMPUTER

Model A £299 **Model B £399**
incl. VAT (carr £7)


UPGRADE KITS. Upgrade your Model A to Mod. B with our Upgrade Kits and save yourself £ s s s

- BBC1 16K Memory (8 x 4816AP-3 100nS) £16.00
- BBC2 Printer User I/O Port £6.98
- BBC3 Disk Interface Kit £65.00
- BBC4 Analogue I/O Kit £6.40
- BBC5 Serial I/O Kit £6.70
- BBC6 Expansion Bus Kit £6.10
- Printer Cable Ready made 36" £11.95
- Complete Upgrade Kit Mod. A to Mod. B £43.00

Complete range of Connectors & Cables available for BBC Micro. Send SAE for list.

DISC DRIVES

'TEAC' BBC Compatible

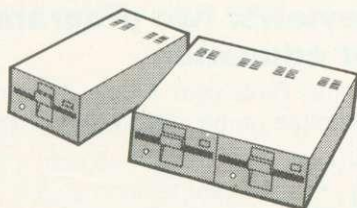

- US50A—Uncased, Single sided, 40 track, 5 1/4", 100K £125
- CL50A—Cased, Single sided, 40 track, 5 1/4", 100K £150
- CS50A—Cased with own Power Supply, S/S 40 track, 5 1/4", 100K £180
- CD50A—Twin Cased with own PSU, Single sided, 40 track, 5 1/4", 200K £350
- CS50E—Single case with own PSU, Single Sided, 80 track, 5 1/4", 200K £250
- CD50E—Twin cased with own PSU, Double sided, 80 track, 5 1/4", 400K £475
- CD50F—Twin cased with own PSU, Double sided, 80 track, 5 1/4", 800K £599
- Mitsubishi Slim Line—Uncased, Double density, Double track, 5 1/4", One Megabytes, track density 96TPI, track to track access time 3mSec only £249
- Single Drive Cable for BBC Micro £8
- Twin Drive Cable for BBC Micro £12
- 10 Verbatim Diskettes, 5 1/4", S/sided £18
- 10 Verbatim Diskettes, 5 1/4", D/Sided £30

BBC PRINTER AP100A



10" Tractor Feed, 80 Columns, 30 CPS normal & double width Characters. Dot res graphics. Parallel Interface Standard. Our price includes **FREE** 500 SHEETS of PAPER.

Only £175 (£7 carr)

- **SEIKOSHA GP250X** 10" Tractor Feed, 80 col. 50 CPS, normal & double width & height characters, RS232 & Centronics Interfaces standard. £235 (£7 carr)
- **PRINTER CABLE** to Interface above printers to BBC Micro £11

NEC PC8023BE-C Printer

100 CPS, Bi-directional, logic seeking, 80 columns, Tractor/Friction, 2K Buffer, proportional spacing, attractively finished
£320 (£7 carr)

Interface Cable for BBC Micro £12

EPSON MX80FT/3

10" Tractor & Friction feed, 9 x 9 matrix, 80 col., speed 80 cps, Bi-directional, hi-res bit image graphics. Subscript & superscript, Italics & underlining. Only £324 (£7 carr)

Printer Interface Cable for BBC £12

MX100FT/3


15" Carriage, 136 columns, plus all the facilities of MX80FT/3 Only £425 (£7 carr)

LISTING PAPER

8 1/2" or 9 1/2" Fanfold paper plain or ruled (1000 sheets) £7 (150p carr)
15" fanfold paper (1000 sheets) £9 (150p carr)

Teleprinter Roll (econo paper) £3 (150p carr)

MONITORS



MICROVITEC 1431. 14" Colour Monitor. RGB Input. (as used in BBC Prog.) Price including connecting Lead £249.95 (carr £7)


ZENITH 12" Green Monitor. Excellent res. £80 (carr £7)

CASSETTE RECORDER & ACC.

Top quality Sanyo Slim-line, portable Cassette Recorder. Ideal for Computer use. Mains/Battery operated with counter. £28
C12 Computer Grade Cassettes in library cases 40p

STAK-PAK

The unique computer program filing and storage system. Made of tough black plastic these compact drawer sections hold two cassettes each and lock together vertically to form miniature cabinets of any height. Each drawer section has two Agfa C12 Cassettes with labels plus external index card. Five twin Paks (10 Cassettes) £6.00



READY-MADE LEADS for BBC

CASSETTE LEADS: 7 pin DIN Plug to 5 pin DIN Plug + 1 Jack Plug £2.00
to 3 pin DIN Plug + 1 Jack Plug £2.00
to 7 pin DIN Plug £2.50
to 3 pin Jack Plug £2.00
6 pin DIN to 6 pin DIN Plug (RGB) £2.50

RIBBON CABLE LEADS 36" long

(Female Plug at one end, other end free)

- SK9 Printer Cable (26 way Female) £2.75
- SK10 I/O cable (20 way Female) £2.00
- SK11 1MHz Bus Cable (34 way Female) £3.20
- SK 12 Tube Cable (40 way Female) £3.70

PRINTER LEAD 36" Ready made £11

Single DISC DRIVE Cable £8
Twin DISC DRIVE Cable £12

MISCELLANEOUS CONNECTORS

	Plugs	Sockets
RGB (6 pin DIN)	30p	45p
RS423 (5 pin Domino)	30p	40p
Cassette (7 pin DIN)	25p	65p
ECONET (5 pin DIN)	15p	25p
Paddles (15 pin 'D')	£1.10	£2.15

IDC MALE Headers

to fit BBC PC Board

- 2 x 10 way (20 pin User Port) £1.00
- 2 x 13 way (26 pin Printer Port) £2.00
- 2 x 17 way (34 pin DISC Intr) £2.35
- 2 x 17 way (34 pin 1MHz Bus) £2.35
- 2 x 20 way (40 pin Tube) £2.50

Official JOYSTICKS £11.50/pr

LIGHT PEN

All parts available for the Acorn User's "SHINE A LIGHT" Light Pen article for £8.50

BUSINESS SOFTWARE for BBC. Written by professional Chartered Accountants and coded by competent Programmers. Ideal for small & medium size companies.

- CASH BOOK ACCOUNTS PACKAGE £82
- SPREAD SHEET ANALYSIS. BEEBCALC £17.35

- **INVOICES & STATEMENTS**
Has customer file to produce Invoices & monthly statements. Calculations include automatic VAT. Saves hours of tedious work. 17.35

- **COMMERCIAL ACCOUNTS**
The features include: Daily Journal, Credit Sales, Cash Sales, Credit Purchases, others, Sales Ledger, Purchase Ledger, Bank Account. Year to date summary. A fully interactive program suitable for all businesses. Files can be saved and loaded. Useful for Cashflow control with an immediate accessibility to Debtors & Creditors totals. Bank totally supported incl. running balance. 17.35

- **MAILING LIST**
A dedicated database to allow manipulation of Names, Addresses & other information. The unique 'searchkey' system gives further 10 user definable parameters for own selections. Facility to find name or detail when only part of the detail is known. Prints labels in variety of user specified formats. £17.35

- **DATABASE**
The program that everybody needs. Facility includes: Sort Search, List print if req., Ideal for Card Index application. You can write your own Database to suit your req. with limitless number of entries on separate cassettes. £17.35

- **STOCK CONTROL**
Takes tedium out of stock control & saves time and money. Routines include stock setup, user reference numbers, minimum stock level, financial summary, line print records, quick stock summary, add/delete stock, etc. £17.35

- **HOME ACCOUNTS**
Runs a complete home finance package for you with every facility necessary for keeping track of all expenses like, H.P., Bank, Mortgage, etc. £17.35

- **WORD PROCESSOR**
This program features routines found in much larger & expensive programs. Very easy to use. Allows 1000 word (approx) in memory. Ideal for writing letters. Features incl., Block delete, Block insert, search and replace, edit text, display text etc. £17.35

For BBC SOFTWARE and BOOKS see our advert on Page 25 of this magazine.

ACORN ON THE

KNIFE-EDGE

OF TECHNOLOGY

DESIGNING and building the BBC micro is a difficult act for Acorn to follow. Their first computer to do so will be the Electron, a machine aimed at the home market with the same high-flying ambition as the Beeb.

The launch date is still not finalised, despite what many magazines have claimed. And the Electron is being kept very close to the company's collective chest. No more details have been released beyond what was said in last October's *Acorn User*.


The reason why is still the same as last October: 'Finalising the ULA is the dominant factor.' These words, issued by managing director Chris Curry say it all. Acorn is working at the forefront of technology – the largest logic array chips, the largest ROMs.

Acorn is trying to squeeze the utmost out of ULAs – and they are difficult to deal with. As director Andy Hopper who is in charge of chip design said: 'Manufacturing steps are fairly simple – but they take time. If a fault is found it can take months for it to be corrected.'

So when the latest iteration of the ULA comes in, Acorn holds its collective breath. Because if the ULA is tested and it works – Bingo. Acorn have their new worldbeater. And when it does, *Acorn User* will be the first to let you know.

Tony Quinn
Editor

APRIL 1983
NUMBER NINE



5

News that effects YOU

Acorn User Show, international events, ROM exchange, Z80 prices, micro data base, school interface

10

Graphics listings

Stars and stripes, John Brown's body, roses and Russian for your delight and delectation

12

Hexangle, BBC game listing

Peter Balch pits your wits against your micro in a world of triangles

19

The sound of music

Frere Jaques and Bach canons to astound any musical ear by Jim McGregor and Alan Watt

27

Hints and tips on disc drives

What do you get for your money and how fast are they? Joe Telford reports and reviews

28

Machine code, part VI

Tony Shaw and John Ferguson round off their series by considering the powerful CALL statement – and create a new graphics command

42

Beeb programming forum

Ian Birnbaum answers your problems in the best possible way – and hands out cheques for ideas

45

Micros in primary schools

Should young children be taught to program? Heather Govier considers this divisive issue

51

Reviews: two programs for education

Charles Bake uses Animal and an adventure game in his school

53

Reviews: MEP program

How good is the software pack for primary teachers?

55

Feedback

A major new discussion column on matters relating to articles in *AU*

57

Reviews: Atom software

Barry Pickles looks at games programs and adventures

59

Beeb 0.1 cassette bug fix

Saving problems on 0.1 machines can be solved with this simple listing

62

Interfacing the 1MHz bus

Paul Beverley presents the long-awaited second part of his article in February's *AU*

How to submit articles: You are welcome to send articles to the Editor of *Acorn User* for publication. *Acorn User* cannot undertake to return them unless a stamped addressed envelope is enclosed. Articles should be typed or computer written with double line spacing. Black and white photographs or transparencies are also appreciated. If submitting programs a cassette or disc is vital. Payment is £50 per page or pro rata. Please indicate if you have submitted your article elsewhere. Send articles, reviews and information to: The Editor, *Acorn User*, 53 Bedford Square, London WC1B 3DZ.

Subscription Information: Send your cheque or postal order made payable to Addison-Wesley Publishers Ltd to: *Acorn User*, BKT (Subscription Services) Ltd, Douglas Road, Tonbridge, Kent TN9 2TS, England. Tel: (0732) 351216 Telex: 95573

69

BCPL language ROM

Stan Froco introduces the first of the promised packs from Acornsoft

75

Prize competition

Simon Dally sets you thinking from his hospital bed with the offer of software

83

Introduction to printers

Before you shell out the cash, read the second in George Hill's series

87

Reader's letters

More gems here than you'll find in complete issues of other magazines

92

Reader services

Subscriptions, back issues, binders, photocopies, reprints – just for starters. Just wait till next month!

94

User groups

Find out what's going on around your corner

95

Dealer list

So you know where to go for help, advice, hardware, and the rest

Coming soon in *Acorn User*:

- Musical style – how to analyse and reproduce it
- DIY interface box for the BBC micro
- DIY sound generator for the Atom
- Printers – what to do if it doesn't work
- Reviews – printers, software, books
- Teletext explained
- Graphics

Annual subscription rates

UK	£15
Europe	£18
Middle East	£20
The Americas and Africa	£22
Rest of the World	£24

These prices are inclusive of post and packing (air mail overseas) for 12 issues



Cover design by Tewfick Codsi

Editor
Tony Quinn
Editorial Assistant
Kitty Milne
Managing Editor
Jane Fransella
Production
Peter Ansell
Tina Teare
Marketing Manager
Paul Thompson
Promotion Manager
Pat Bitton
Publisher
Stanley Malcolm
Designers and Typesetters
GMGraphics, Harrow Hill
Graphic Designer
Phil Kanssen
Printed in Great Britain
by E.T.Heron & Co. Ltd
Advertising Agents
Computer Marketplace Ltd
20 Orange Street
London WC2H 7ED
01-930 1612

Distributed to the News Trade
by Magnum Distribution Ltd.
72-8 Fleet Street,
London EC4Y 1HY.
Tel: 01-583 0961
Telex: 893340 Magnum G.

Published by
Addison-Wesley Publishers Ltd.
53 Bedford Square,
London WC1B 3DZ
Telephone: 01-631 1636
Telex: 8811948
ISSN: 201-17002 7
©Addison-Wesley
Publishers Ltd 1983

All rights reserved. No part of this publication may be reproduced without prior written permission of the publisher. The publisher cannot accept any responsibility for claims or errors in articles, programs or advertisements published. The opinions expressed on the pages of this magazine are those of the authors and do not necessarily represent those of the publisher. Acorn Computers Ltd, or Acornsoft Ltd, Acorn, Acornsoft, and the Acorn symbol are the registered trademarks of Acorn Computers Ltd and Acornsoft Ltd.


Special offer to readers on binders



THESE specially commissioned binders are available exclusively through *Acorn User* at an introductory price of £3.95 which includes postage and packing. So, to keep a year's worth of your magazines in prime condition, send for one of these maroon, simulated leather finish binders. *Acorn User* is printed in gold on each.

Make your cheque payable to Addison-Wesley Publishers Ltd, and sent it to BKT (Subscriptions), Douglas Rd, Tonbridge, Kent TN9 2TS.

Include your name and address or use the form on page 92. Allow four weeks for delivery. This offer applies to the UK only.

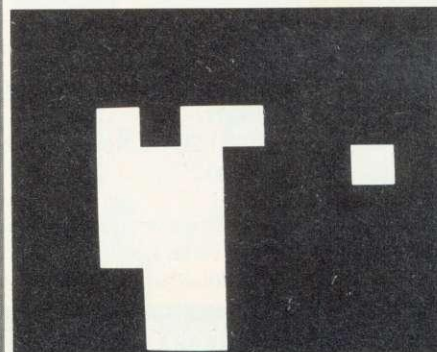

Who is this? Turn to page 5 for clues


Official **BBC** Dealer



Model B £399

(price includes VAT. Carr. extra £8)

Complete Upgrade Kit **£50**
Installation **£15**
Individual Components also available.
All mating connectors with cables in stock.

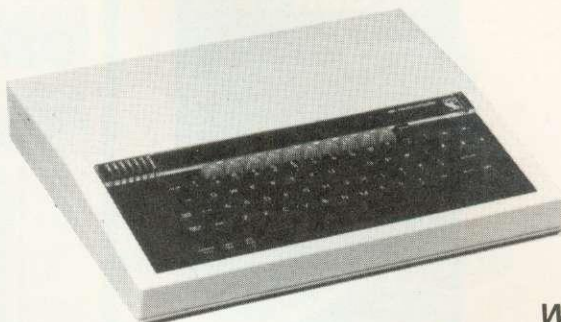

'VIEW' BBC Word Processor ROM	£52
Teletext Adaptor	£196
2nd Processor (6502) + 64K RAM	£170
2nd Processor (Z80) + 64K RAM	£170

Please Phone to Check Delivery Details on New Add-ons


SEND or PHONE FOR OUR BBC LEAFLET

BBC COMPATIBLE 5¼" DISC DRIVES

These are TEAC mechanism fully compatible with BBC. They are supplied with independent power supply and housed in BBC matching cabinet.

SINGLE DRIVES: 100K **£190** 200K **£255** 400K **£345**
DUAL DRIVE: 200K **£360** 400K **£480** 800K **£610**

Carr. £6/Single drive £8/Dual drive. Disc Cable: Single £8 Dual £12



PRINTERS

NEC PC8023 BEC

- 80 Cols. 100 CPS • Proportional Spacing • Hi-Res & Block Graphics
- Bi-directional Logic Seeking • Forward & Reverse Line Feed • International & Greek Alphabet • Auto underline
- Super & Sub Scripts • 2K Built-in buffer

£320 + £8 Carr.



EPSON MX80 & 100F/T3

- MX80: 80 Cols. 80 CPS • MX100: 136 Cols. 100 CPS • Bit Image Printing
- Hi-Res Graphics • Bi Directional Logic Seeking • International Characters
- 32 Print FONTS • Auto underline
- Super & Sub Scripts

MX80 F/T3 **£325 + £8 Carr.**
MX100 F/T **£425 + £10 Carr.**

Please send SAE for our detailed price list of electronic and computer components

SEIKOSHA GP100A

- 80 Cols. 30 CPS • Self Testing • Hi-Res Graphics • Standard & Double width characters only

£185 + £6 Carr.



MONITORS

Microvitec 1431 14" Colour Monitor
£249 + £8 Carr.
Microvitec 2031 20" Colour Monitor
£319 + £8 Carr.

Kaga 12" Colour Monitor RGB
£250 + £8 Carr.
Kaga 12" Antiglare Green Monitor
£107 + £6 Carr.
Hi-Res 12" Green Screen Antiglare Monitor **£99 + £6 Carr.**

Sanyo Cassette Recorder
£26.50 + £1.50 Carr.
Cassette Leads
7 pin DIN 3 jacks **£3.50**
7 pin DIN pin DIN + jack **£4.00**

We carry a wide range of connectors and assemblies, Microprocessors, RAMs, EPROMs, Crystals, etc.
Price Lists, Leaflets available on request. Large stocks enable same day despatch on most orders.
Special pricing for dealers purchasing in quantity.

TECHNOMATIC LTD

MAIL ORDERS TO: 17 BURNLEY ROAD, LONDON NW10 1ED
SHOPS AT: 17 BURNLEY ROAD, LONDON NW10
(Tel: 01-452 1500, 01-450 6597. Telex: 922800)
305 EDGWARE ROAD, LONDON W2

PLEASE ADD 40p p&p & 15% VAT
(Export: no VAT, p&p at Cost)

Orders from Government Depts. & Colleges etc. welcome.



Detailed Price List on request.
Stock items are normally by return of post.



BBC system goes worldwide

THE BBC computer literacy scheme, and with it Acorn's BBC micro, has now been launched overseas.

New Zealand saw the official announcement of the scheme on December 6, with *The Computer Programme* going out on national TV from the beginning of March. There are now estimated to be about 600 BBC micros in the country.


In Australia, the big launch took place on February 14 with the TV series starting in some states on May 13. The BBC micro has been available for about a year and more than 1500 are in use, mainly in schools. This is despite there being no direct government funding for micros in education, although individual states can give grants to buy equipment. This may soon change however as the country's elections have taken place. Both major political parties have committed themselves to spending up to \$20 million on micros for schools.

Meanwhile, across the Atlantic, the Public Broadcasting Service is showing *The Computer Programme* to the Americans from April 16. The BBC micro is not yet available, as major hardware changes have had to be made because the US television system has a different number of lines making up each screen. Acorn has a subsidiary in the US and a launch is

planned for later this year. Advance machines are already undergoing trials in the US.

Australia is reported to be interested in setting up its own telesoftware service, under the auspices of the state-owned ABC TV. An Australian Education User Group has been set up for the Beeb in Melbourne, and Econet seems to be popular, with about 70 systems already in action.

Three groups are handling the literacy scheme: the BBC in Sydney, Acorn's distributor Barson's, and Pitman Publishing. Although 1000km separates these three, Siriol Giffney of the BBC described the launch as 'a successful and very co-operative venture.'

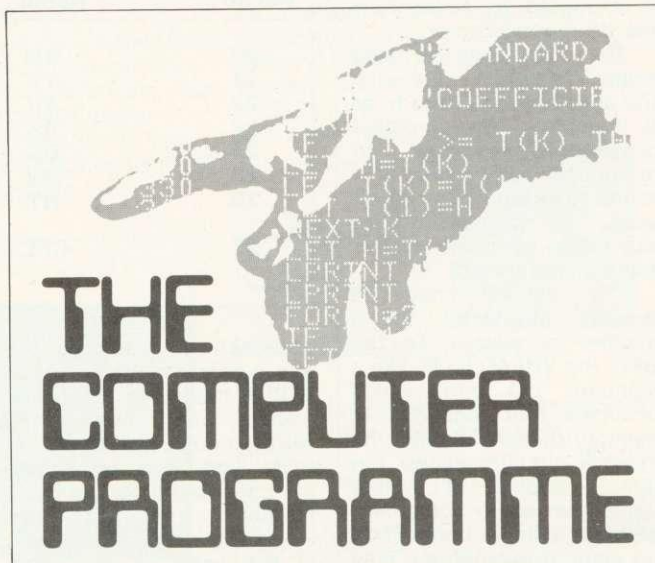

That famous hand again. . . symbol for TV series

Capital venue for Acorn User Show

A MAJOR new computer show will be launched this year by *Acorn User*.

The venue is the Cunard International Hotel, Hammersmith Broadway, London, and it will take place from August 25 - 28.

Many of *Acorn User's* authors will be there for you to meet and there will be a special edition of the magazine.

The Cunard Hotel offers excellent facilities, with which we hope to overcome the crush associated with some computer ex-

hibitions, and drab surroundings offered by others.




Acorn and other hardware suppliers will be on show with discs, printers, second processors, software, the BBC Buggy - not to mention the Electron, which will be making its first major public appearance.

There will be demonstrations of all new developments by and for the BBC microcomputer system - teletext, Prestel, Econet, new languages and graphics packages.

Acorn User will be sponsoring competitions with major prizes for the winners.

So, whatever your plans in August, cancel the holidays and come along to the big family show. Look out for more details in future issues of *Acorn User*.

Computer Marketplace, the magazine's advertising agents have more details for exhibitors. Their address is 20 Orange St, London WC2 7ED. Tel:01-930 1612.

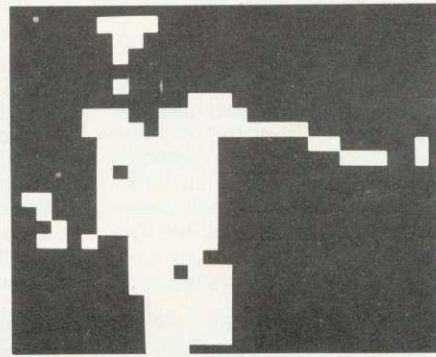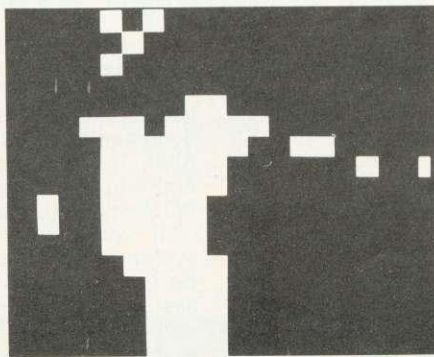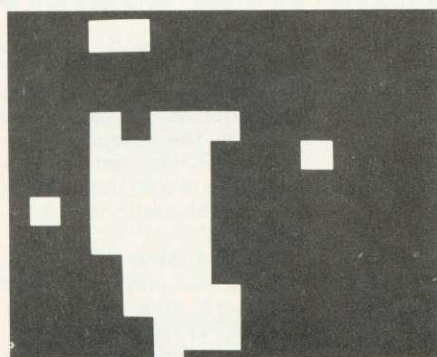

These pictures, provided by the BBC, show a sequence of digitised computer images. The first, on page 3, uses about 80 bits.

These three use 154, 320 and 616 bits. More clues on page 43 as to the identity of this world famous sportsman.



US voice chip set for new generation of micros

THE vocal harmonic frequency analysis device (VHFAD) – a new concept in voice chips – is expected to arrive from the US around Easter.

The chip relies on large scale integration, plus what the specifications refer to as a 'complete Analog-digital converter configured to reproduce any harmonic sound as an equivalent 32-bit word.' This means that over four billion harmonic sounds may be interpreted.

The VHFAD may be directly interfaced to a number of micros. To the BBC, the VHFAD looks like a standard I/O port, which occupies four locations in memory (hence 32 bits). Its internal circuitry allows the direct coupling of a line input from audio equipment or, via a suitable buffer (741 op amp), a microphone may be connected.

A third set of control lines is available for connection to the outside world via a block of eight DIL switches, which may be connected to pins 20 to 28.

The VHFAD is designed around the principle that when the human voice is supplemented by harmonics, as in forms of singing, or chanting, it develops linearity which transcends dialect, and in some cases nationality.

From tests in Silicon Valley, it transpires that every word or phrase produced during singing can be classified into one of eight variations.

This means it is possible to select a wide range of voice input so there will be no need to follow the old

Table of switch settings		
Pin no	Name	Vocal grouping
20	BM	Bass male
21	TV	Tenor voice
22	AU	Unisex alto
23	SS	Standard soprano
24	BS	Boy soprano
25	MV	Minstrel vocalist
26	NT	Not tuneful (dissonance)
27	CFC	Check final consonant

approach of repeating the few words which the micro is then trained to recognise. Instead, whole phrases and words could be stored in ROM, and once set by the switches to the correct vocal harmonic response, this would allow accurate analysis of the voice of any user, within the eight groups.

With no training, the user could sing out his commands which would be decoded with an error of 0.001%,

which represents the percentage of like-sounding words in the English language.


One expected use for this device has been found by the National Coal Board. A test site has been suggested in Wales, where it is hoped miners will be able to clock on orally, removing the disastrous effect of coaldust on the present mechanical apparatus.

Education users will find the inclusion of a dissonance (NT) switch will enable the device to be used with young children, who may occasionally appear tuneless, or with the older secondary pupil who may have difficulty with hymnal vocalisation.

Users should keep their eyes open for BBC add-ons incorporating the chip. One well known advertiser in these pages has christened their prototype unit the 'Beeb Sing-in', but Acorn should look out as Clive Simclair is rumoured to be considering using a VHFAD chip to replace the keyboard of his next micro.

However, Acorn joint managing director Chris Currie was adamant: 'If it comes to a shouting match, we'll win.'

Mr Simclair was keeping very quiet about it all, and not a whisper has been heard from him since very early in April.

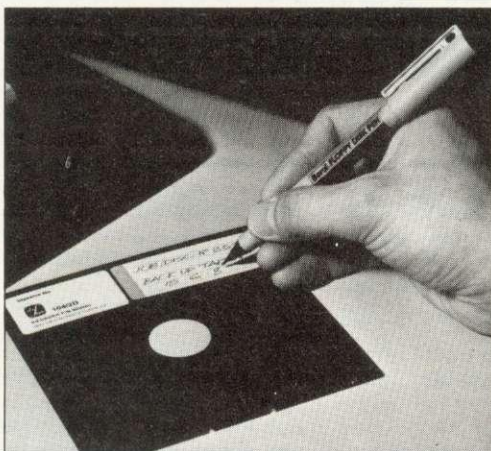

Floppy disc pen – no kidding!

WHO says British companies are slow on the uptake? Berol appear to be first on the market with a floppy disc pen! The idea is that its 'unique safety tip' will automatically bend before a floppy disc can be damaged if the writer presses too heavily on its cover: 'Far better a bent nib which can soon be straightened,' say Berol, 'than a ruined floppy disc costing £5 or more, which may contain £100s if not £1000s worth of information!'

The Berol Floppy Disc Pen is available in four colours, 'including a special fade-resistant black for documents which need a long storage life'. The other colours are blue, green and red. It will cost 45p.

Official story on ROM exchange available from dealers

THE saga of operating system ROMs continues. We called four major Acorn dealers to get their side of the story, and found little evidence of any official policy. However, all the dealers said they will have stock of 1.2 ROMs by the time you read this.

Prices ranged from £10 (inc. VAT) to £12.50 (inc. VAT) for supply and installation. This will be done free of charge when replacing operating systems in EPROM, although one dealer said this only applied to the four-chip EPROM. The EPROMs are fitted into the PCB just

under the keyboard on the right hand side (*User Guide* p498).

Dealers said they had no documentation on the 1.2 and didn't know if they would receive any.

We also asked if dealers had any information on the Basic II ROM. This is an updated version of BBC Basic containing a few extra commands, a slightly more economical use of memory and changes in some error messages. One dealer thought it would be available by the end of March/beginning of April; the others had no information.

So here is Acorn's official line. Dealers should have received 1.2 ROMs by the middle of March, with documentation arriving by April. The cost agreed with Acorn to fit and test the new ROM was £10 (plus VAT).

If you have the 0.1 system in EPROM, there will be four of them, so the 1.2 system change will be free (type *FX0). Only 1.0 systems were supplied in the form of two chips, which are on a 'carrier' – an extra piece of circuit board which fits into a ROM socket.

The differences between the 0.1 and 1.2 systems is

that the second corrects bugs in the first (notably the cassette loading problem) and contains several new features. The reason people with EPROMs get a free exchange is that these chips are valuable, and can be reused.

Now for Basic II. Contrary to what you may have read elsewhere, this does exist and is already in ROM. Acorn have not yet finalised distribution, but they are trying to arrange a minimum charge for supply and fitting. Watch this space – *Acorn User* will be carrying a major article on the new systems.

Come to

MICROAGE

ELECTRONICS

for sensational
value packages*



BBC + Disk Interface, 800k
Disk Drive, Word Processing ROM,
Epson Printer, Dust covers for all
units, Basic Programming Book,
Cassette lead, Paper & Cable.

Normal Price £1748.80
Our Price £1599.00
Saving £149.80

**FREE
COURIER**

BBC MACHINES

Model A, 32K RAM & 6522 Chip	£329.00
Model B	£399.00
Model B + Disk Interface	£494.00
BBC Dust Covers	£3.95
BBC Compatible Single Disk Drive* (100K)	£235.00
BBC Compatible Dual Disk Drive* (200K)	£389.00
BBC Dual Slimline Disk Drive* (Double Sided & Density 800K)	£799.00
Verbatim Single Sided Diskettes 10 for	£22.50
Verbatim Double Sided Diskettes 10 for	£39.95
Let us fit a disk interface in 24hrs	£95.00
Second processor Z80	£195.00
Teletext receiver	£225.00
RH Electronics colour light pen	£37.00

BBC MONITORS

14" RGB Microvitec Colour Monitor (as used in the BBC Computer Prog.) Including lead	£284.00
Microvitec High Res. Colour Monitor	£575.00
12" Zenith High Res. Green screen Monitor	£95.00
BNC Cable for above	£4.95
BBC Compatible Cassette Player price on application	
Blank Data Cassettes 10 for	£3.50
	+ £1.30 p&p
DIN to Jack Lead	£2.00
	+ 75p p&p
Official Joysticks per pair	£13.00
	+ £1.30 p&p

*All Drives include manual and utility Disk.

All items subject to availability.

All the products are the official versions,
beware of imitations, they will invalidate
your guarantee.

We accept official orders from educational
establishments.

Credit card holders can phone in for
express despatch.

Send large S.A.E. for lists and info pack.

ACORN SOFTWARE FOR BBC



*Snapper, *Planetoid, *Monsters, *Rocket Raid,
*Meteor, *Super Invaders, Philosophers
Quest, Sphinx Adventure, Arcadians, Lisp
Cassette, Peeko Computer, Creative
Graphics Tape, Graphs and Charts Tape,
Desk Diary, Arcade Action, View (on ROM)
and Printer Drive Cassette.

*Available on Disk.

All Acornsoft at £9.95 each, except
Arcade Action (£11.90), Lisp (£16.85),
View and Printer Drive (£69.90),
Wordwise word Processing ROM (£46.00)
+ £2.00 p+p.

Only a selection of Acornsoft available.

Drawn to scale.



BBC compact, slimline Disk Drive.


BOOKS

Practical Programs for BBC & Atom	£5.95
BASIC Programming on the BBC Micro	£5.95
Assembly language programming for BBC	£8.95
BBC Micro Revealed	£7.95
Creative Graphics, Graphs & Charts, LISP	all at £7.50 each
30hr. BASIC	£5.95
Let your BBC Micro teach you to program	£6.45



BBC Model 'B' wordprocessing
pack at a low price of **only £699.**
Save £44. Normal price £743.
The Pack consists of: BBC Model
'B' GP100 Printer Cables, Cassette
Player Word Processing ROM 1,000
sheets of paper. Then add the
GP100A Printer at only £215.
The lowest price ever.

**FREE
COURIER**

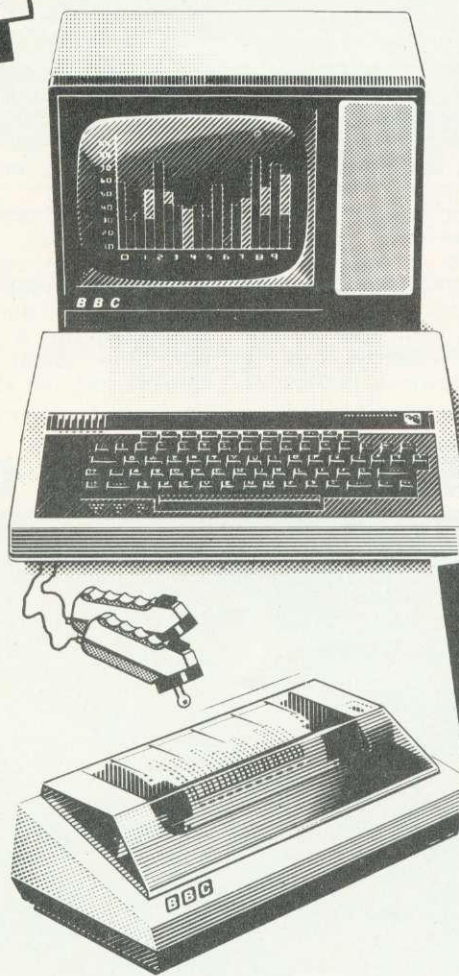

PRINTERS

Acorn AP-80A now down to	£189.00
Acorn AP-100A now down to	£215.00
AP-80A Ribbons	£4.95
AP-100A Ribbons	£5.95
Epson MX-80 F/T 111 (new model, Dot matrix High res. graphics, 80 or 132 chars. per line	£390.00
All printers include cable & paper	
Epson Dust Cover	£3.95
Parallel printer cable	£15.00

POSTAGE RATES

Small items such as Ribbon, books &
software:— 1 item **£1.00**, 2 items or more
All Dust Covers £1.00 p&p **50p** per unit

BY COURIER TO YOUR DOOR

Large items such as Computers, Disk
Drives & Monitors:— 1 item **£7** 2 items **£10**
3 or more **£13**

ATTENTION!!

All Lynx, Oric, BBC, Commodore 64
owners, we pay top royalties for quality
software programs. Please write or
phone for details.

Barclaycard and Access



welcomed All prices include VAT

**ALL PRICES INCLUDE VAT. FOR FURTHER
DETAILS AND MAIL ORDER LIST SEND LARGE S.A.E.**
Open Mon - Sat 9.15am - 6.00pm. Thurs 9.15am - 1.00pm.

MICROAGE ELECTRONICS
135 HALE LANE EDGWARE MIDDLESEX HA8 9QP
TEL: 01 959 7119 TELEX 881 3241



Error in article on building a lightpen

THE article in the March *Acorn User* on page 27 'Shine a light' on building a lightpen by Joe Telford contains a slight mistake.

Everywhere that 'pin photodiode' appears it should read 'Schmitt receiver'. The RS Catalogue number is 303 270 and the cost is the same (£6.33). Stockists may exchange the part if you have already bought one, so check with them.

Basic program editor for Beeb

SCRED - a word processor designed for editing Basic programs already in memory as well as text - is available on cassette or disc.

Several special features are provided for program editing, as well as normal word processing facilities. A screen dump for the Epson is included, which can be tailored to other printers. Double-height screen characters and other effects are translated into print control codes automatically.

Scred will run programs up to 19k in size and operates in mode 7, with the top two lines for file name and commands. It occupies memory location &D00 to &3600 (&3500 to &7C00 for disc).

A BBC model B, or 32k A, is needed to run the software which costs £18 on cassette or £21 on disc. The makers will upgrade from tape to disc for £6.

Details from Stable Software, Barn Close, Compton St, Compton, Winchester, Hants SO21 2AT.

Micro database links to Prestel

MICRONET 800 - claimed to be the world's largest database for micros - should now be in action after a March 1 launch.

Subscribers who pay a £50 joining fee (for the first 10,000 applicants), plus £50 a year after that will have access to software, news and an electronic mail service through a telephone modem which links their micro to British Telecom's Prestel mainframe computers.

The modem is provided with software on cassette - and a personal password for the user. Once the modem software program is loaded, the user rings up the mainframe and puts the telephone handpiece in the modem which plugs into the micro's RS232 socket. Micronet then asks for the password and, if this is correct, opens up its files.

Micronet users can then scan through a library of programs and enter them into their micro's memory without the need to do any typing. This is known as 'downloading' software. Some programs will be free, while others have to be paid for.



The system can also access all of the Prestel pages, although Prestel users will only be able to enter certain parts of Micronet and will not be able to download.


Initially, only six micros will be catered for, the BBC being one of them. Once connected up, a model B will have about 22k of memory left, the rest being

used for the system software and screen display.

Subscription charges will be added to the user's phone bill, as will the cost of any software used and the normal connect charge. Fairly substantial programs should cost about £3 to £4, which should beat normal prices as software houses have no cassette, packing or distribution costs - apart from the charge for setting up the pages.

When the service was initially launched, its backers estimated there would be more than 100 free programs and 50 to pay for. User group pages have been set up with bulletin boards. The 250,000 Prestel pages, which have so far been mainly used for business, travel, news and entertainment information will also be open.

Versatile interface aimed at schools

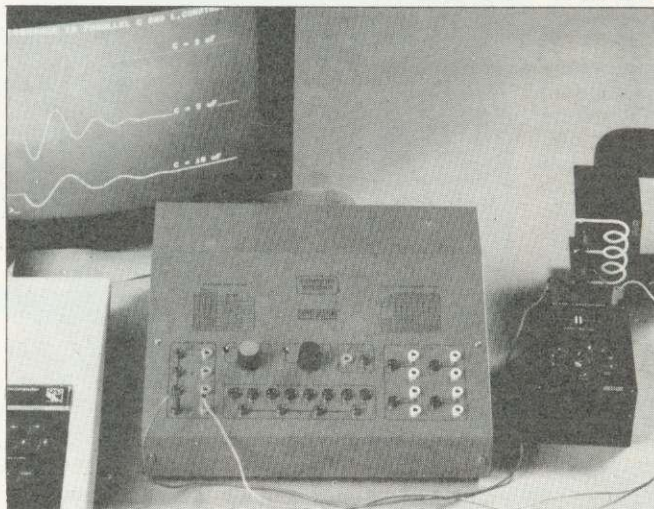

THE Unilab micro interface detailed in the first issue of *Acorn User* is now available for £163.

This device was developed to link scientific experiments to micros and is only available initially for the BBC model B.

Uses for the interface include data capture or analysis, timing, signal generation and control. It connects to the 1MHz bus by a ribbon cable.

Unilab manufactures several devices which can be linked to the interface, including environmental and geophysical survey kits, signal generator, biological amplifier and radiation detectors.

The company appears keen to provide support for people using the interface, and included with the device are several cassette programs on applications to back up the manual.

Further, a software exchange will be set up whereby Unilab will distribute programs developed by users at cost price.

All sounds good stuff, and Unilab can give details on postage and VAT at Clarendon Rd, Blackburn, Lancs, BB1 9TA.

Price is up on Z80 board, but down on discs

ACORN has increased the price of the Z80 second processor by £100, to £295. This is justified in the new BBC microsystem brochure by the short phrase 'inc. software'.

The company has apparently negotiated a CP/M-compatible package of programs (version 2.2) to suit a small business. Details were not available, but an Acorn spokesman said it would be well worth the extra money.

The brochure (Information

Sheet G3, February) gives initial delivery of all three second processors (6502, Z80 and 16-bit) as '2nd Qtr 83'. However, it is unlikely they will be available before the summer.

Meanwhile, the price of dual discs has fallen by £100 to £699 plus VAT.

Also, the invisible voice chips look set to appear. They were supposed to have been launched before Christmas, but this never happened. A deal is being


sorted out whereby the charge for the two voice chips and fitting will include the plug-in cartridge socket (the infamous hole or 'ash-tray' in early Beeb keyboards which has now been fitted with a cover).

Manuals for the voice synthesiser and Econet are in preparation. Acorn has also produced a firm price list for Econet, and claims to be installing about ten of these networks a month in Britain.

The B.B.C. Microcomputer Model B

available today, but designed for the future...

Are you looking for a home computer that is **flexible** - that can cover education, entertainment or business; **powerful** - that offers 32K of memory; and is above all **great value**?

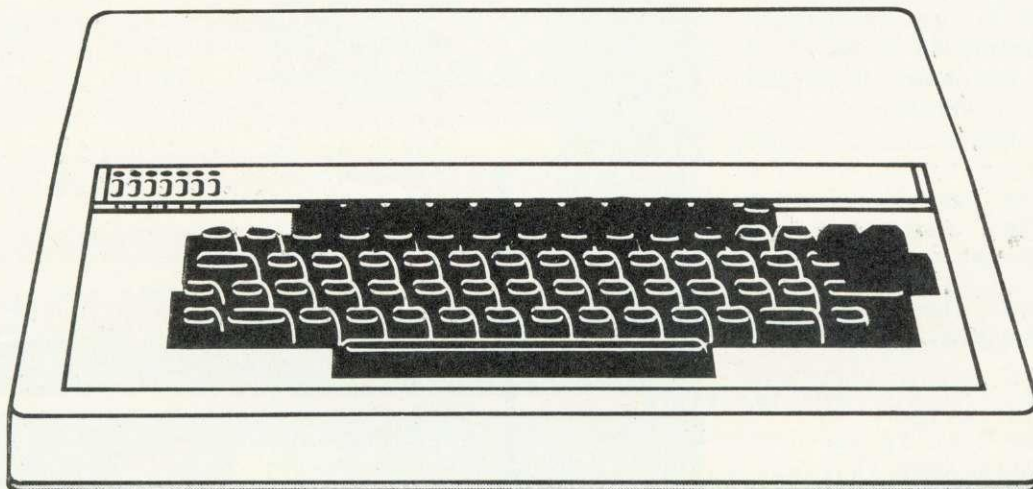

Then look no further! Come and see us at **Microstyle** and we'll show you the **B.B.C. Micro**.

A home computer system designed to grow hand-in-hand with the abilities of it's user, and that is capable of keeping pace with advances in modern technology.

We stock a wide range of exciting games and systems packages, quality add-on facilities and a comprehensive selection of accessories designed to expand your B.B.C. system.

Games & Educational Software:	Our range is growing daily, and we deal direct with independent, specialist software suppliers to bring you one of the widest choices available in the South-West.
Screens & Monitors:	Green Screen, 12" Monitors. £90.00 Colour Monitors, 14" screen. Make the most of hi-resolution graphics in colour. £285.00
Cassette Decks:	Great value <i>WITH COUNTER</i> . £33.65
Joysticks:	Add a new dimension to your games B.B.C. joysticks. £13.00
Accessories:	Our stock covers just about everything you could ever need. For example, B.B.C PARALLEL PRINTER CABLE. £19.95

Printers:	One of the most valuable aids to the programmer or business user. Our range includes: Epson MX80 FT III. £385.00 GP100A £224.25 GP250X £299.00 FOUR COLOUR PRINTER/PLOTTER. 4½" roll fed paper. £149.00 Discom BYTEWRITER. Great value, low-cost daisy wheel printer/type-writer. £557.75
Books:	Keep up to date with developments, our stock of books and publications is changing all the time. There's always something new!

ALL PRICES ADVERTISED INCLUDE VAT


Contact us now for your B.B.C. Microcomputer.
available ex-stock at £399.00

Don't forget, we also stock a wide selection of other systems
COMMODORE, SPECTRUM, ZX81 and COLOUR GENIE

Talk to **Microstyle** the people who make computing understandable

The Newbury Computer Centre, and
47 Cheap Street, Newbury.
Telephone: Newbury (0635) 41929

The Bath Computer Centre
29 Belvedere,
Lansdown Road, Bath.
Telephone: Bath (0225) 334659

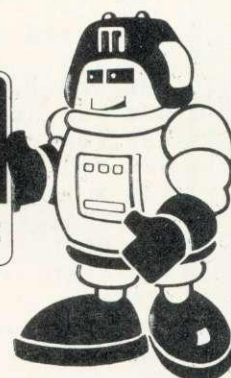

FROM Robert Harding at Cambridge University comes *Stars and Stripes*. This was inspired by a trip he made to California in the company of a BBC micro.

The Americans were impressed with the Beeb's speed and graphics, and we feel the program is topical considering the launch of the BBC TV series over there, and Acorn's plans in the US.

```



10 REM *** STARS & STRIPES ***
15 REM   Model B, uses MODE 1
20 REM Written by Robert Harding
28 :
30 PROCinitplay
35 PROCplay(2)
38 :
40 REM table of COS for stars
50 DIM CS(12)
60 FOR I%=0 TO 12
70 CS(I%)=COS(RAD(30*(I%-1)))
80 NEXT
82 :
100 H=650: W=1.5*H :REM height, width
110 H1=300: REM height of blue box
120 W1=1.5*H1: REM width of blue box
130 S=1.25 : REM OVERALL SCALE FACTOR
140 X0=100: Y0=100 : REM base corner
190 H=H*S: W=W*S: H1=H1*S: W1=W1*S
192 st2=W1/20: st1=st2/3
198 :
200 REM --- main shape ---
210 MODE 1: GCOL 0,3 : REM white
220 PROCbox(X0,Y0,W,H)
230 GCOL 0,1 : REM red stripes
240 FOR I%=0 TO 6
242 PROCplay(1)
250 PROCbox(X0,Y0+I%*H*2/13,W,H/13)
260 NEXT
270 VDU19, 2,4,0,0,0
280 GCOL 0,2 : REM blue background
290 PROCbox(X0,Y0+H-H1,W1,H1)
298 :
300 REM --- put in the stars ---
310 GCOL 0,3
320 REM 5 rows of 6 first
330 D=W1/6: E=H1/5
340 FOR J%=0 TO 4
350 FOR I%=0 TO 5
352 PROCplay(1)
360 X=D/2+I%*D: Y=E/2+J%*E
370 PROCstar(X0+X,Y0+H-Y,st1,st2)
380 NEXT
390 NEXT
398 :
400 REM --- inner stars ---
410 FOR J%=1 TO 4
420 FOR I%=1 TO 5
422 PROCplay(2)
430 X=I%*D : Y=J%*E
440 PROCstar(X0+X,Y0+H-Y,st1,st2)
450 NEXT
460 NEXT
470 END
900 REM *** END OF MAIN PROGRAM ***
910 REM =====

```

```

998 :
1000 REM --- 6 pt star ---
1010 DEF PROCstar(X,Y,A,B)
1020 LOCAL I%,CU,SU,CU,SV,CW,SW
1030 FOR I%=1 TO 11 STEP 2
1040 CU=CS(I%-1):SU=CS((I%+8)MOD12)
1050 CV=CS(I%+1):SV=CS((I%+10)MOD12)
1055 CW=CS(I%): SW=CS((I%+9)MOD12)
1060 MOVE X,Y
1070 PLOT 0,A*CU,A*SU
1080 PLOT 85,X+A*CV,Y+A*SV
1090 PLOT 85,X+B*CW,Y+B*SW
1100 NEXT
1110 ENDPROC
1998 :
2000 REM --- rectangle ---
2010 DEF PROCbox(X,Y,A,B)
2020 MOVE X,Y
2030 PLOT 0,A,0
2040 PLOT 81,-A,B
2050 PLOT 81,A,0
2060 ENDPROC
2998 :
3000 REM -----
3010 REM play a few notes
3020 DEF PROCplay(NUM%)
3030 LOCAL I%,N%,T%
3040 IF NP%>=NNOTES% THEN ENDPROC
3050 I%=0
3060 REPEAT
3070 READ N%,T%
3080 IF N%<100 THEN 3082 ELSE 3088
3082 SOUND 1,V%,4*N%+33,T%:GOTO 3090
3088 SOUND 1,0,0,T%
3090 SOUND 1,0,0,1
3100 I%=I%+1: NP%=NP%+1
3110 UNTIL I%=NUM% OR NP%=NNOTES%
3120 ENDPROC
3138 :
3140 REM -----
3150 :
3160 REM initialise for tune.
3170 DEF PROCinitplay
3175 READ NNOTES%,V%
3180 NP%=0
3200 ENDPROC
8998 :
9000 REM   Data for JOHN BROWN
9010 DATA 77,-15
9020 DATA 7,12, 7,12, 4,9, 7,3, 12,9
9030 DATA 14,3, 16,9, 16,3, 16,9, 14,3
9040 DATA 12,12, 100,6
9060 DATA 9,12, 9,12, 12,9, 11,3, 12,9
9070 DATA 9,3, 7,9, 9,3, 7,9, 5,3
9080 DATA 4,12, 100,6
9090 DATA 7,12, 7,12, 4,9, 7,3, 12,9
9100 DATA 14,3, 16,9, 16,3, 16,9, 14,3
9110 DATA 12,12
9120 DATA 12,9, 12,3, 14,12, 14,12
9130 DATA 12,12, 11,12, 12,18, 100,6
9140 DATA 7,18, 5,3, 4,9, 7,3, 12,9
9150 DATA 14,3, 16,24, 12,21, 100,3
9160 DATA 9,18, 11,3, 12,9, 11,3, 12,9
9170 DATA 9,3, 7,24, 4,21, 100,3
9180 DATA 7,18, 5,3, 4,9, 7,3, 12,9
9190 DATA 14,3, 16,24, 12,12, 100,3
9200 DATA 12,9, 12,3, 14,12, 14,12
9210 DATA 12,12, 11,12, 12,24

```

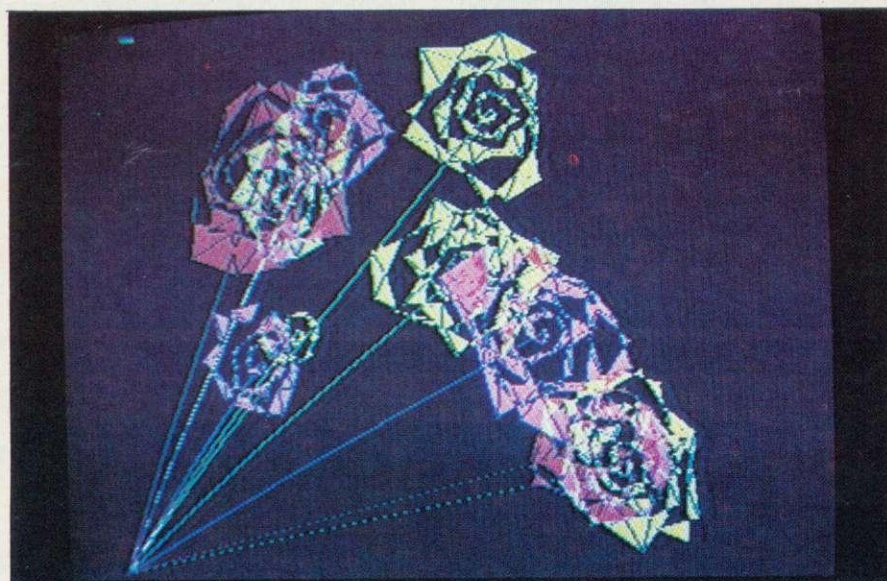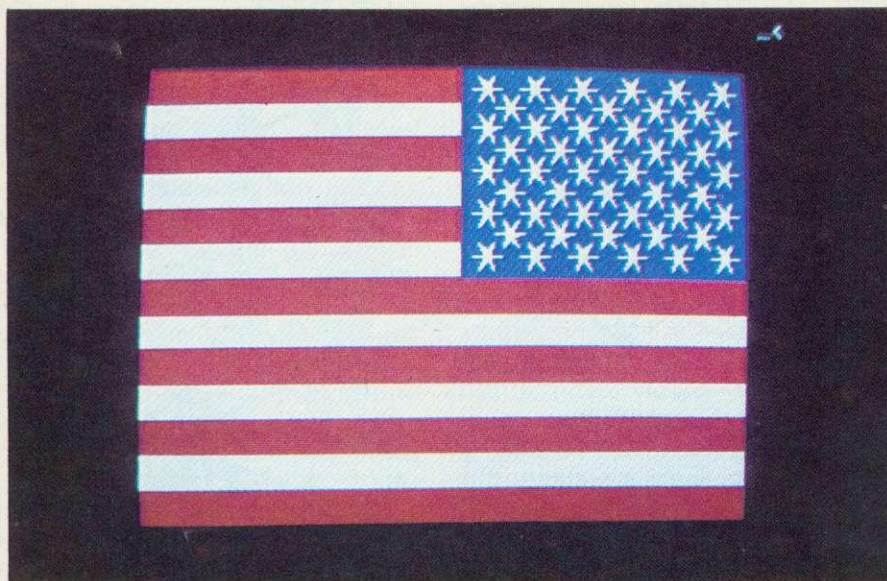One of our readers, B. Mitchell from Merseyside, is learning Russian. He

```
10 MODE 5
20 VDU 23,224,62,34,34,34,34,66,
  66,255 : D$=CHR$(224)
30 VDU 23,225,134,138,138,146,
  146,162,162,194 : N$=CHR$(225)
40 PRINTTAB(3,16)"3";D$;"P";"A";
  "B";"C";"T";"B";"Y";N$;"T";"E"
50 END
```

wrote to tell us about an interesting little program for the BBC micro.

This prints out ZDRAVSTVYEE (ZDRAVSTVYEE) which is 'HELLO' in Russian. About 16 characters of the Russian alphabet need defining on an eight by eight matrix—the other 13 have English equivalents. Most Russian words will only need two or three characters being so defined.

Perhaps you could apply this to Chinese or Japanese!



THIS program is especially for Mother's Day. It draws random bouquets of roses in mode 1 on the BBC model B.

Lines 40 to 70 determine the colours, which are randomly selected for each flower by line 90. Lines 110 and 120 randomly select the centres for individual flowers.

Lines 170 and 180 produce a circle. Since the diameter (M) increases with the angle B, a spiral is being drawn. The number of revolutions is determined by the random variable F. To plot the rose flower leaves, the spiral radius is always changing in a random fashion (line 160).

Experimenting is worthwhile. Try substituting B/16 by B/15.7 in the line 180. B/14 produces exotic flowers. RND (10) in line 160 is worthy of study also.

Our thanks to Heinz Eipel for sending the program all the way from Germany.

LIST

```
10 REM ROSE BOUQUET
20 CLS
30 MODE 1
40 VDU 19,0,0,0,0,0,0
50 VDU 19,1,1,0,0,0,0
60 VDU 19,2,5,0,0,0,0
70 VDU 19,3,3,0,0,0,0
80 FOR A=1 TO 12
90 GCOL 3,RND(3)
100 MOVE 0,0
110 D=RND(800)+250
120 E=RND(800)+150
130 MOVE D,E
140 F=RND(200)+300
150 FOR B=1 TO F STEP 4
160 M=(B/(RND(10)+10))
170 X=M*5*SIN(B/16)+D
180 Y=M*5*COS(B/16)+E
190 PLOT 85,X,Y
200 NEXT B
210 NEXT A
220 GOTO 20
```




HEXANGLE

Peter Balch presents
a game for two – you
and your computer.
It runs on a 32k BBC
micro with either
operating system (0.1
or 1.0). The listing has
been dumped from
cassette onto a printer
to avoid any errors.
Good luck.

Hexangle is a game of wits – yours against the computer. You both take turns to fill in the lines between the six yellow points; the computer draws red lines and you draw in white. The first one to draw a triangle of his or her own colour loses. However, only triangles with a point at each corner matter.

When the board is drawn, a flashing white line will appear – this is the cursor. You can move the cursor around by holding down the left and right arrow keys. When the cursor is in the position that you want, press return. On the first move

of the game, you can miss your turn by pressing the space bar.

The computer then makes its move. It considers each line in turn while moving the cursor around – then fills in one of them in red.

It is not possible to draw, and the computer plays a pretty mean game in the difficult mode – especially if you go first.

The procedure which decides which move to make is called CHOOSEMYMOVE. It tries a red line in each legal position and works out a 'Score'. This measures how good or bad that position is and is called a 'heuristic'.

First, the routine checks whether the new red line would form a red triangle – if so, this is a losing position and score is given a large negative value.

```

10  ENVELOPE 2,144,2,44,29,113,105,2
20,57,-25,-94,-42,123,57:SOUND 17,2,100
,255
20  REM HEX
30  REM COPYRIGHT (C) P.R. BALCH
40  REM ANALOGUE INFORMATION SYSTEMS
50  REM 1982
60  REM
70  REM =====
80
90  DIM PX(6),PY(6),VX(6),VY(6)
100 DIM LIN%(6,6)
110 PROCINIT
120 :
130 REM PRINT THE RULES
140 :
150 MODE 1
160 VDU 19,0,4,0,0,0
170 VDU 19,2,1,0,0,0,0
180 VDU 19,1,0,0,0,0
190 PRINT TAB(10,7);"H E X A N G L E"

200 PRINT TAB(10,8);"=====

210 PRINT TAB(1,11);"Do you want the
Rules";
220 INPUT S$
230 VDU 23;8202;0;0;0;0
240 IF LEFT$(S$,1)="Y" OR LEFT$(S$,1)
="Y" THEN PROCRULES
250 PRINT TAB(1,14);" (E:easy I:inte
rmediate D:difficult)"
260 PRINT TAB(1,13);"What level of di
fficulty";
270 INPUT S$
280 DIFF%=2
290 IF LEFT$(S$,1)="E" THEN DIFF%=0
300 IF LEFT$(S$,1)="I" THEN DIFF%=1
310 MODE 2

```

```

320 :
330 VDU 23;8202;0;0;0;0
340 :
350 REM START OF NEW GAME
360 :
370 REM DRAW THE BOARD
380 :
390 PROCDRAWBOARD
400 START%=0
410 FOR A%=1 TO 6
420   FOR B%=1 TO 6
430     LIN%(A%,B%)=0
440   NEXT
450 NEXT
460 GOTO 740
470 :
480 REM IF I HAVE WON
490 :
500 REM I WIN
510 PRINT TAB(6,3);"I Win      "
520 ENVELOPE 2,28,-108,-17,-19,61,76
,193,-63,-117,-1,-50,107,74:SOUND 17,2,
100,255
530 PROCDRAWTRIAN
540 MYSCORE=MYSCORE+1
550 GOTO 670
560 :
570 REM IF THE HUMAN HAS WON
580 :
590 REM YOU WIN
600 PRINT TAB(6,3);"You Win    "
610 ENVELOPE 2,1,4,-4,4,10,20,10,127,
0,0,-5,126,126:SOUND 17,2,100,255
620 PROCDRAWTRIAN
630 YOURSCORE=YOURSCORE+1
640 :
650 REM WRITE THE SCORE
660 :

```




Then it calls COUNTBADLINES to count how many 'bad' lines are left on the board. A bad line is one where the computer can't play without losing. Ten is subtracted from the score for each line found. In other words, the more bad lines there are, the worse the position.

Next, the computer changes the trial red line for a yellow one - one of yours. If that results in a white triangle then the position is a slightly bad one for computer - it should be trying to force you to play there. So the score is again decreased - the amount subtracted depends on how far through the game we are.

The score obtained for each position is compared with the 'best score' obtained so far. If it is worse, that position is rejected. If it is

better, the new position becomes the 'best score'. If the new score is the same as the best score then one is chosen at random.

After looking at every legal move, the computer plays the line which gave the overall best score.

The computer has three levels of play - easy, intermediate and difficult. In the easy mode, it avoids playing in a losing position but otherwise plays at random. In the intermediate mode, it considers some lines in detail but doesn't think about the others. The proportion considered in detail in this mode can be made larger by putting a larger number in the RND function on line 3160.

Lines 160, 170 and 180 specify the colours used for the instructions, while lines 1670, 1680, 1690

and 1940 specify the colours used for the game. You can alter these statements. Look up VDU 19 in the *User Guide*. This controls which actual colour a 'logical' colour is displayed as.

You may well want to try writing a better algorithm for the computer - a better version of CHOOSEMYMOVE. For instance, for each move that it considers, it could check what your response might be and then its response and so on. This would take a long time at the start of the game when there are many lines to choose from and so should only be used during the last four or five moves.

To play the game, type it in, LOAD "HEXANGLE", wait for the cursor prompt > and then RUN. Good luck - you will need it.

```
670 IF YOURSCORE>MYSCORE THEN PRINT T
AB(3,30);YOURSCORE;" - ";MYSCORE;" to Y
ou"
680 IF YOURSCORE<MYSCORE THEN PRINT T
AB(3,30);MYSCORE;" - ";YOURSCORE;" to M
e "
690 IF YOURSCORE=MYSCORE THEN PRINT T
AB(3,30);MYSCORE;" Each "
700 GOTO 350
710 :
720 REM DO THE HUMAN'S MOVE
730 :
740 REM YOUR MOVE
750 PROCGETMOVE
760 IF A%=0 THEN 810
770 LIN%(A%,B%)=2
780 PROCDRAWLINE(A%,B%,3)
790 PROCTRIANGLE(2)
800 IF WIN%=1 THEN 500
810 START%=START%+1
820 :
830 REM DO MY MOVE
840 :
850 PROCCHOOSEMYMOVE
860 PROCDRAWLINE(T%,U%,2)
870 LIN%(T%,U%)=1
880 PROCTRIANGLE(1)
890 IF WIN%=1 THEN 600
900 GOTO 740
910 REM =====

920 DEF PROCRULES
930 :
940 REM PRINT THE RULES
950 :
960 CLS: PRINT TAB(0,1)
970 ENVELOPE 2,20,25,5,-30,88,217,41
,67,-51,-2,-14,127,34:SOUND 17,2,100,25
5
```

```
980 PRINT "I will draw a hexagon lik
e this with"
990 PRINT "dots at the corners. ";
1000 PRINT TAB(14,15);"o";TAB(23,15);
1010 PRINT"o";TAB(14,29);"o"
1020 PRINTTAB(23,29);"o";TAB(9,22);
1030 PRINT"o";TAB(28,22);"o"
1040 GCOL 0,1
1050 FOR I=1 TO 5
1060 FOR J=I+1 TO 6
1070 MOVEPX(I),PY(I):DRAWPX(J),PY(J)
1080 NEXT
1090 NEXT
1100 A=INKEY(500)
1110 PRINT TAB(0,4);"Then we will tak
e turns to draw in"
1120 PRINT "the lines. I will draw i
n Red and"
1130 PRINT "you will draw in White."
1140 GCOL 0,3
1150 MOVEPX(5),PY(5):DRAWPX(2),PY(2)

1160 DRAWPX(4),PY(4):DRAWPX(6),PY(6)

1170 GCOL 0,2
1180 MOVEPX(1),PY(1):DRAWPX(3),PY(3)
1190 DRAWPX(4),PY(4):DRAWPX(1),PY(1)
1200 A=INKEY(1000)
1210 PRINT "The first person to draw
a triangle of"
1220 PRINT "his or her own colour wit
h a dot at"
1230 PRINT "each corner loses. In th
is drawing,"
1240 PRINT "I have a triangle and you
haven't so"
1250 PRINT "I have lost."
1260 A=INKEY(1000)
```


I'M FREDDIE - FLY ME!



More unique
BBC programs exclusively
from Kansas

F FOR FREDDIE IS THE HARDEST GAME THAT YOU WILL EVERPLAY!

Requires absolute concentration to prepare, take-off, fly and land a tri-star jet at varying destinations using a staggering 36 control keys!

If you only play the arcade type of game, needing just a couple of keys and the space bar to play, then this is most certainly not for you.

If however, you are prepared to sit at your computer for literally hours on end getting to grips, and then give a considerable amount of effort and time into actually trying to solve it, then this is definitely for you.

Though F for Freddie is a flight simulator type of game, it is not one with simple operation and the ground appearing at the front of you, but is as accurate a simulation of not only flight, but preparation, take-off and the many more occurrences associated with flying a tri-star jet as a 32K micro will allow.

Controls? A mind boggling 36 of them! And it is here where the logic and skill comes in, as everything must be done not only in the correct order but at the right time. Yes, it's in real time, with the clock ticking relentlessly away.


But the great asset of this 'game' is that every little piece of information you require is shown on the screen, nearly fifty in all, continuously being updated, with the colours being cleverly used to depict different, changing, situations.

Eventually you will master the take-off, then even manage to fly and at long last manage to land. But unlike all other games, at this stage you don't put it away for ever, for you have seven different destinations, all on different courses and distances...

There are plenty of instructions on the 36 controls and even a little advice, but as the whole thing is a colossal challenge, you are not told how to fly Freddie, this you have to discover entirely for yourself...

At times you will wish, as most certainly will your family, that you never bought the blasted thing!

£9.50 Vat and post paid

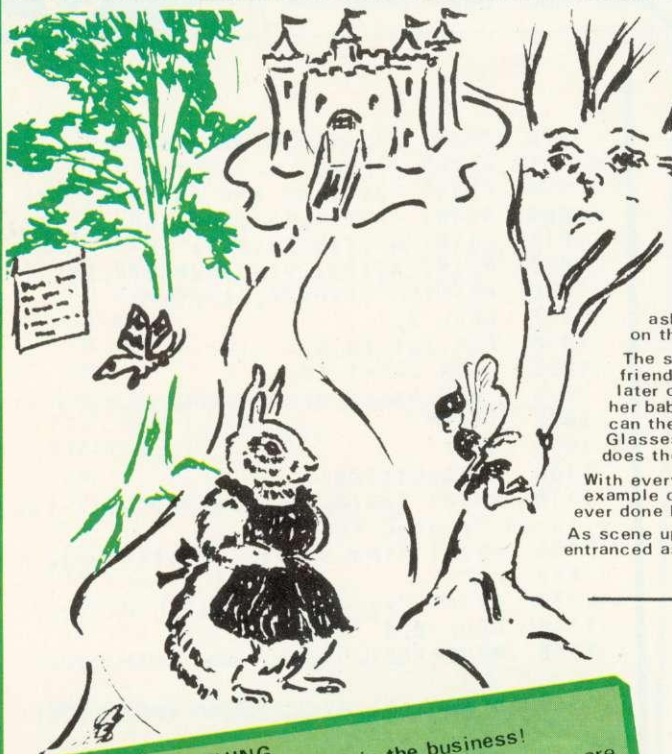

For the children alone...

Magic Adventure

In Magic Adventure, Beth and David Guest have created a wonderland journey for children between 4 and 10.

Simple in operation, using the User Defined Keys, it nevertheless uses the BBC to its full with colourful pictures and wonderful story.

As the child brings up the locations, a simple question is asked, with the adventure proceeding in different way depending on the response.

The scenes include the Talking Tree—who played a nasty trick on a friend so was punished by the Fairy. But if the Talking Tree helps later on, all will be forgiven...Poor mother rabbit needs help to count her babies...Dare the Cage be opened...what is in the Grassy Field...can the King's Spell Jar be found...what is the real colour of the Glasses...will the fairies dance...is the Castle locked...where does the Path lead...will the Fairy come...will there be a surprise...

With everything illustrated in colourful graphics, this is a delightful example of the programmers' art and refreshingly different from anything ever done before. Sound of course.

As scene upon scene unfolds, the children will be more and more entranced as they go on their Magic Adventure...

£8.50 Vat and post paid

You don't believe us!

We have been amazed at the number of people who just will not accept that we DO operate a return first class post service.

It seems that so many of you have been let down so many times by the upstart software houses, that it is obviously going to take some while to accept professional service.

We assure you, all advertised programs are in stock and that every single order will be despatched in our private Post Office collection at 4.30pm the same day the order is received, and by the faster metered mail (no stamps to be franked).

Another big moan is the very limited guarantee which most firms give and the hassle in trying to get tapes replaced. And of course, those of you who have purchased from the 'here today—gone tomorrow' brigade, there's no chance.

How reassuring to know we've been in the media publishing business, from this address for 25 years, as well as being the longest established software publishers in the Business.

But best of all we give an unconditional life-time guarantee which means that should a program fail, no matter what the cause, it will be replaced absolutely free of charge, this year, next year or in ten years...

It's the REAL THING
—the best FROGGER in the business!

You've seen the pictures of all the others—they are all surpassed by the Kansas Frogger!

It's just like the Arcade version with five lanes of traffic at different speeds, three lanes of logs and two lanes of turtles.

And sinking turtles and different levels with increased speed and real crocs and tunes and a top score table...

Without any fear of contradiction we state that no other Frogger offered by anyone gives as much or is so like the original—we'll stake our reputation on it...In high resolution Mode 2 of course.

£9.50 Vat and post paid

Kansas

Recognised Brand Leader in microcomputer software

Kansas City Systems, Unit 3, Sutton Springs Wood, Chesterfield, S44 5XF. Tel. 0246 850357




```

1270 PRINT "Use the arrow keys until
the line you"
1280 PRINT "want flashes then press R
ETURN. Press"
1290 PRINT "SPACE if you want me to g
o first."
1300 A=INKEY(10000): CLS
1310 ENDPROC
1320 REM =====
1330 DEF PROCINIT
1340 :
1350 REM INITIALISE VARIOUS THINGS
1360 :
1370 REM THE COORDINATES OF THE
1380 REM BOARD IN THE RULES
1390 :
1400 PX(1)=300: PY(1)=300
1410 PX(2)=464: PY(2)=526
1420 PX(3)=750: PY(3)=526
1430 PX(4)=908: PY(4)=300
1440 PX(5)=750: PY(5)=76
1450 PX(6)=464: PY(6)=76
1460 :
1470 REM THE COORDINATES OF THE
1480 REM MAIN BOARD
1490 :
1500 VX(1)=160: VY(1)=494
1510 VX(2)=416: VY(2)=844
1520 VX(3)=862: VY(3)=844
1530 VX(4)=1112: VY(4)=494
1540 VX(5)=862: VY(5)=140
1550 VX(6)=416: VY(6)=140
1560 :
1570 REM THE SCORES
1580 :
1590 MYSCORE=0
1600 YOURSCORE=0
1610 ENDPROC
1620 REM =====
1630 DEF PROCDRAWBOARD
1640 :
1650 REM DRAW THE MAIN BOARD
1660 :
1670 VDU 19,0,4,0,0,0
1680 VDU 19,2,1,0,0,0
1690 VDU 19,1,0,0,0,0
1700 COLOUR 3
1710 :
1720 REM DRAW THE DOTS
1730 :
1740 PRINT TAB(6,5);"o";TAB(13,5);
1750 PRINT"o";TAB(17,16);"o"
1760 PRINTTAB(6,27);"o";TAB(13,27);
1770 PRINT"o";TAB(2,16);"o"
1780 :
1790 REM DRAW THE LINES IN BLACK
1800 :
1810 GCOL 0,1
1820 FOR I=1 TO 5
1830 FOR J=I+1 TO 6
1840 MOVE VX(J),VY(J)
1850 DRAW VX(I),VY(I)
1860 NEXT
1870 NEXT
1880 ENDPROC
1890 REM =====

```

```

1900 DEF PROCGETMOVE
1910 :
1920 REM GET THE HUMAN'S MOVE
1930 :
1940 VDU 19,4,10,0,0,0
1950 PRINT TAB(6,3);"Your Move"
1960 ENVELOPE 2,24,15,29,34,19,37,194
,0,89,-78,-114,68,69:SOUND 17,2,100,255

1970 FOR J=1 TO 1000: NEXT
1980 :
1990 REM CYCLE THROUGH EACH LINE
2000 REM WHEN AN ARROW KEY IS PRESSED
2010 REM MEANWHILE FLASH THE CURSOR
2020 :
2030 AX=1: BX=1: I=1
2040 IF AX>=BX THEN 2190
2050 IF AX<BX AND LIN%(AX,BX)>0 THEN 2
190
2060 D=3: E=10
2070 PROCDRAWLINE(AX,BX,D)
2080 IF INKEY(-26) THEN I=1: GOTO 216
0
2090 IF INKEY(-122) THEN I=-1: GOTO 2
160
2100 IF INKEY(-74) THEN 2310
2110 IF INKEY(-99) AND START%=0 THEN
PROCDRAWLINE(AX,BX,1): AX=0: GOTO 2310

2120 E=E-1: IF E>0 THEN GOTO 2070
2130 D=4-D: E=5
2140 GOTO 2070
2150 :
2160 PROCDRAWLINE(AX,BX,1)
2170 IF I=1 THEN ENVELOPE 2,23,19,37,
-70,178,245,232,-2,29,-10,-117,101,34:S
OUND 17,2,100,255
2180 IF I=-1 THEN ENVELOPE 2,135,-47,
74,66,240,43,136,-106,-17,-74,-62,121,7
0:SOUND 17,2,100,255
2190 BX=BX+I
2200 IF BX=7 THEN BX=1: GOTO 2230
2210 IF BX=0 THEN BX=6: GOTO 2230
2220 GOTO 2040
2230 AX=AX+I
2240 IF AX=7 THEN AX=1
2250 IF AX=0 THEN AX=6
2260 GOTO 2040
2270 :
2280 REM THIS IS THE LINE CHOSEN
2290 REM MAKE SURE AX<BX
2300 :
2310 IF AX>BX THEN C=AX: AX=BX: BX=C

2320 ENVELOPE 2,6,56,-15,-87,133,99,1
58,9,-20,-49,-50,123,79:SOUND 17,2,100,
255
2330 ENDPROC
2340 REM =====
2350 DEF PROCDRAWLINE(A,B,C)
2360 :
2370 REM DRAW THE LINE FROM A TO B
2380 REM IN COLOUR C
2390 :
2400 GCOL 0,C
2410 MOVE VX(A),VY(A)

```




```

2420 DRAW VX(B),VY(B)
2430 ENDPROC
2440 REM =====
2450 DEF PROCTRIANGLE(C)
2460 :
2470 REM LOOK FOR A TRIANGLE
2480 REM OF COLOUR C
2490 :
2500 WIN%=0
2510 FOR A%=1 TO 4
2520 FOR B%=A%+1 TO 5
2530 IF LIN%(A%,B%)<>C THEN 2600
2540 FOR C%=B%+1 TO 6
2550 IF LIN%(A%,C%)<>C THEN 2590
2560 IF LIN%(B%,C%)<>C THEN 2590
2570 TA=A%: TB=B%: TC=C%
2580 WIN%=1
2590 NEXT
2600 NEXT
2610 NEXT
2620 ENDPROC
2630 ENDPROC
2640 REM =====

```

```

2650 DEF PROCDRAWTRIAN
2660 :
2670 REM DRAW THE WINNING TRIANGLE
2680 REM IN AMAZING COLOURS
2690 :
2700 PROCDRAWLINE(TB,TC,C)
2710 PLOT 86,VX(TA),VY(TA)
2720 FOR I=1 TO 15
2730 FOR C=0 TO 7
2740 PROCDRAWLINE(TA,TB,C)
2750 PROCDRAWLINE(TA,TC,C)
2760 PROCDRAWLINE(TB,TC,C)
2770 NEXT
2780 NEXT
2790 PLOT 86,VX(TA),VY(TA)
2800 ENDPROC
2810 REM =====
2820 DEF PROCCHOOSEMYMOVE
2830 :
2840 REM CHOOSE MY BEST MOVE
2850 :
2860 PRINT TAB(6,3);"My Move "
2870 IF START%>1 THEN 2990
2880 :
2890 REM MY FIRST MOVE IS RANDOM
2900 :
2910 TX=RDND(5)
2920 UX=RDND(6)
2930 IF UX<=TX THEN 2910
2940 IF LIN%(TX,UX)>0 THEN 2910
2950 ENDPROC
2960 :
2970 REM OTHER MOVES NEED MORE THOUGH
T
2980 :
2990 BEST%=-30000
3000 :
3010 REM CONSIDER EACH LINE IN TURN
3020 :
3030 FOR X%=1 TO 5
3040 FOR Y%=X%+1 TO 6
3050 IF LIN%(X%,Y%)>0 THEN 3470

```

```

3060 PROCDRAWLINE(X%,Y%,15)
3070 ENVELOPE 2,5,21,19,38,31,105,1
2,85,13,-35,-53,99,42:SOUND 17,2,100,25
5
3080 S%=0
3090 :
3100 REM TRY IT FIRST IN MY COLOUR
3110 :
3120 LIN%(X%,Y%)=1
3130 PROCTRIANGLE(1)
3140 IF WIN%=1 THEN S%=-10000: GOTO
%-10000: GOTO 3350
3150 IF DIFF%=0 THEN 3350
3160 IF DIFF%=1 AND RND(3)=1 THEN S
3170 :
3180 PROCCOUNTBAD(1)
3190 :
3200 REM IS IT BAD FOR THE HUMAN?
3210 :
3220 LIN%(X%,Y%)=2
3230 PROCTRIANGLE(2)
3240 IF WIN%>1 THEN 3310
3250 S%=S%-9
3260 IF START%<4 THEN S%=S%-2
3270 :
3280 REM RED,RED,WHITE TRIANGLES
3290 REM ARE GOOD
3300 :
3310 FOR J%=1 TO 6
3320 IF X%=J% OR Y%=J% THEN 3340
3330 IF LIN%(X%,J%)+LIN%(J%,X%)+LI
N%(Y%,J%)+LIN%(J%,Y%)=3 THEN S%=S%+3
3340 NEXT
3350 LIN%(X%,Y%)=0
3360 :
3370 REM IF IT'S BETTER THAN THE
3380 REM BEST SO FAR THEN
3390 REM REMEMBER IT
3400 :
3410 IF S%<BEST% THEN 3460
3420 IF S%=BEST% AND RND(2)>1 THEN
3460
3430 BEST%=S%
3440 TX=X%
3450 UX=Y%
3460 PROCDRAWLINE(X%,Y%,1)
3470 NEXT
3480 NEXT
3490 ENDPROC
3500 REM =====
3510 DEF PROCCOUNTBAD(F%)
3520 :
3530 REM COUNT THE NUMBER OF LINES
3540 REM THAT F% CAN'T PLAY
3550 :
3560 FOR G%=1 TO 5
3570 FOR H%=G%+1 TO 6
3580 IF LIN%(G%,H%)>0 THEN 3630
3590 LIN%(G%,H%)=F%
3600 PROCTRIANGLE(F%)
3610 IF WIN%=1 THEN S%=S%-1
3620 LIN%(G%,H%)=0
3630 NEXT
3640 NEXT
3650 ENDPROC
>

```


CLEAR AND CRISP CHARACTERS AND GRAPHICS

Get the best from your BBC/Acorn by using the RGB output

Get crisp, clear graphics in full bold colours with one of our TV/Monitors fitted with a 6 pin DIN input socket.

Each is a TELEVISION!

Each is a COMPUTER MONITOR!

Why buy just a monitor when you can have a standard TV as well?

A2102/5, 14½" - £295.54	A6100, 20" - £365.68
A3104/5, 16" - £327.08	A7100, 22" - £399.11
A8400, 26" - £499.35. Remote control (ideal for schools)	

All prices include VAT, carriage, 12 month warranty and a 2m 6 pin DIN lead.

The TVs are from GRUNDIG's range. Remote control and stereo sound also available.

contact:

NEWARK VIDEO CENTRE

108 London Road, Balderton, Newark, Notts

Tel: 0636 71475. Open 6 days a week.

WEST OF SCOTLAND

BBC & ATOM DEALER AND SERVICE CENTRE

HARDWARE

Model A	£299.00 inc.
Model B	£399.00 inc.
Postage & Packing	£6.00 inc.

SOFTWARE

Acornsoft Bug Byte Program Power also
30 Golf Fruit Machine Dodgems
Send SAE for full list

MONITORS PRINTERS

A selection on display A

Upgrades carried out
Disk and Econet interfaces fitted
Also a wide selection of books and magazines

WEST COAST PERSONAL COMPUTERS

47 Kyle Street
AYR

Tel 0292 (285082)



Turn to Computer Plus

Official *BBC* Referral Centre

SPECIAL PRICE PRINTERS! (LIMITED PERIOD)

EPSON — the most popular printer in the world.

MX100F/THH £425 ★★ The new **FX80** at **£375** ★★

SEIKOSHA — low cost, high quality printer, **GP100A £189**, **GP250X £239**

MONITORS — 12" Sanyo **£69**, 12" Kaga RGB **£259**, 14" Microvitec **£269**

SOFTWARE — Acornsoft, BBC, Bugbyte, etc. Computer Concept's

WORDWISE word processor (**£39**) on demonstration (reviewed Beebug Dec. 82)

PLUS — BBC models A and B, disc drives, upgrade kits, joysticks, accessories, books, magazines, etc. *All prices exclusive of VAT*

Computer Plus

47, Queens Road, Watford. Telephone WATFORD 33927

BEEBTAPE

Are you tired of typing printed listings into your BBC micro? Are you fed up with paying high prices for mediocre software? Well with **BEEBTAPE** you can build a library of ready to run software at a low price.

The programs published in the first three issues of **BEEBTAPE** have included:

- a sound and envelope generator
- a railway simulation;
- a memory dump utility;
- an artificial intelligence program;
- a user key definition utility;
- a print formatter for Epson printers;
- two arcade games;
- a scale drawing and measurement program;
- a teletext screen editor;
- a character generator.

Each edition of **BEEBTAPE** comes on cassette or disk (any format) and, as well as programs, includes editorial comment, tips and news items.

BEEBTAPE is published bi-monthly. The price? — **£21** for six issues on cassette or **£30** for the disk version. That's about 70p per program.

CSL MICRODATA

4 GREENBARN WAY, BLACKROD, LANCASHIRE, BL6 5TA.
ACCESS telephone orders welcome on 0204 694265

BBC SOFTWARE

EDUCATIONAL—1 A or B **£8.05**
Hours of fun and learning for children aged 5 to 9 years. Animated graphics will encourage children to enjoy maths, spelling and telling the time. The tape includes MATH1, MATH2, CUBECOUNT, SHAPES, MEMORY (Model B only), SPELL and CLOCK.

EDUCATIONAL—2 A or B **£8.05**
Although similar to Educational—1 this tape is more advanced and aimed at 7 to 12 year olds. The tape includes MATH1, MATH 2, AREA, MEMORY (Model B only), CUBECOUNT and SPELL.

GAMES OF LOGIC AND CUNNING A/B **£9.20**
For children and adults alike. The tape includes AUCTION, FLIP, REVERSE, TELEPATHY and ROTATE.

SUPERLIFE B **£9.20**
Fast (machine code) version of a popular 'Game of Life' in a large universe. Can you produce 'Blinkers', 'Spinners', 'Gliders' and 'Spaceships' or have you only wondered what they look like? All this in Superlife and more as this tape includes 'Competitive Life' with the Reds and the Blues competing for space; perhaps you can alter their evolution.

KATAKOMBS B **£9.20**
Are you cunning enough to discover and seize the treasure in the Katakombs AND return alive? What and where are your enemies? Can you outwit them? Yes? Then your adventure will take you through unending forests, beside tumbling streams, over lonely plains to desolate ruins and finally underground to the tortuous Katakombs.

UTILITIES A/B **£8.05**
Behind the mundane title lies an assortment of useful procedures and functions which can save you hours/days of programming effort: date conversion, input and validation routines, graphic routines (cube, rectangle, etc), sorts, search and many more.

*** **SPECIAL OFFER** ***
Any 3 cassettes for £20.70

Add 50p p/p per order.
Please state your Model and quote ref. AC

Cheque/PO to: **GOLEM LTD**

77 Qualitas, Bracknell, Berks RG12 4QG. Telephone: (0344) 50720



COMPUTERCAT Quality Software BBC MICRO

TOUCH TYPIST (32K)—£9.95 *Educational and useful*
Are you a keyboard pecker? Improve your typing skills. Your computer is your tutor, monitoring and evaluating your progress. Fully documented. Many already sold to educational institutions.

OTHELLO (32K)—£8.95 *Highly recommended*
A favourite board game brought up to date with superb graphics and sound.

SNIG (32K)—£6.95 *Addictive*
Not just an ordinary snake game but a super-fast arcade type needing exceptional reflexes and co-ordination.

BOUNCE (16/32K)—£4.95 *A must at the price*
NEW and FRUSTRATING. Like all ball games it is the timing that's important. Kids love it.

GRIG BLITZ (32K)—£5.95 *Highly recommended*
A fast action arcade game with scintillating multicolour graphics and sound. DEFEND your territory by shooting down the GRIG INVADERS. Ten play levels of increasing difficulty. Are you good enough to reach level 10?

DATABASE (32K)—£12.95 *Good value*
Organise your records. Add, change, search, delete and display routines. Shell SORT. MENU driven and user friendly.

COMPENDIUM (32K)—£5.95 *Three for the price of one*
4 up (Version 1), 4 up (Version 2), Poke the peg. Three board games to test your powers of logic. Four colours and sound. A challenge for 1 or 2 players.

Professionally written

All programs on cassette with instructions/ documentation

Price includes P&P • Delivery by return

Deduct £1 per cassette for 2 or more cassettes

224 Chapel Street, Leigh, Lancs.

(0942) 605730

r q FORTH BBC FORTH TOOLKIT

"r q FORTH" runs on 16K or 32K BBC micros and costs £15. It:
* follows the FORTH-79 STANDARD and has fig-FORTH facilities;
* provides 260 FORTH words;
* is infinitely extensible;
* has a full-screen editor;
* allows full use of the M.O.S.;
* permits use of all graphic modes, even 0-2 (just!);
* provides recursion easily;
* runs faster than BBC BASIC;
* needs no added hardware;
* includes a 70 page technical manual and a summary card;
* has hundreds of users.

Level 9 Computing are pleased to announce a new toolkit for "r q FORTH" on 32K BBC micros. It costs only £10 and adds the following facilities to FORTH:
* a 6502 assembler, providing machine-code within FORTH;
* turtle graphics, giving you easy-to-use colour graphics;
* decompiler routines, allowing the versatile examination of your compiled FORTH programs;
* the full double-number set;
* an example FORTH program; and demonstrations of graphics;
* other useful routines.

nascom

Extension Basic . £15/£30 ROM
Adds 30 new keywords to BASIC
Compression Assembler 2 . £12
Small source + high speed

Asteroids m/c,g £7.90
Galaxy Invaders . m/c,g £5.90
Missile Defence . m/c,g £7.90
Super Gulp eb,g £4.90
5-games cassette . misc £5.90
(FULL RANGE IN CATALOGUE)

adventures Spectrum BBC nascom

1) **COLOSSAL ADVENTURE**: The classic mainframe game "Adventure" with all the original treasures & creatures + 70 extra rooms.

2) **ADVENTURE QUEST**: Through forest, desert, mountains, caves, water, fire, moorland and swamp on an epic quest vs Tyranny.

3) **DUNGEON ADVENTURE**: The vast dungeons of the Demon Lord have survived His fall. Can you get to their treasures first?

Every Level 9 adventure has over 200 individually described locations and is packed with puzzles — a game can easily take months to complete. Only sophisticated compression techniques can squeeze so much in! Each game needs 32K and costs £9.90

ALL PRICES INCLUDE P&P AND VAT — THERE ARE NO EXTRAS. Please send order or SAE for catalogue, describing your micro, to:

LEVEL 9 COMPUTING

Dept A, 229 Hughenden Road, High Wycombe, Bucks. HP13 5PG

THE BEEB PLAYS BACH

As Jim McGregor and Alan Watt demonstrated last month, the BBC micro can produce some impressive music. Here, they take the theme further with Bach. Next month it's 12-bar blues. Roll over Beethoven!

Although careful use of the envelope statement can produce moderately pleasing effects with a single voice (single sound statement), the sound generated is obviously from a fairly simple synthesiser. A lot of the resulting musical inadequacies can be overcome by using two or three voices or sound channels simultaneously. But to do this means solving some tricky queuing and synchronization problems.

Consider playing melodies simultaneously from parallel arrays or separate data streams containing, for each melody line, a pitch and duration value. We could fetch elements alternately from each melody array and send them alternately to two sound channels. A queuing problem arises whenever notes of different durations appear at corresponding points in each melody line – the usual situation in musical arrangements. To start with, consider the problem with two voices or channels. The example in figure 1 – should make things clear where a sequence of four minims is to be initiated in one channel at the same time as a series of quavers in the other channel.

We could attempt to play the melodies by fetching a note from the channel 1 data stream or array

and sending it to the channel 1 queue. We then fetch a note from the channel 2 data stream and send it to the channel 2 queue etc. (By 'send' we mean execute a sound statement.) This approach would be perfectly satisfactory if there was a limitless queue associated with each channel. However, a channel queue can only hold a maximum of five requests (not four as stated in the *User Guide*).

By sending notes alternately to each channel, we have created the correspondence shown by the sloping lines in figure 1. The program will be held up when it attempts to send the seventh minim to the channel 1 queue as the first minim will still be sounding and the next five have filled the queue.

There are also five notes on the channel 2 queue but these are shorter and will be dealt with more frequently than the channel 1 notes. When the first minim on channel 1 has been played, four notes on channel 2 will have finished, leaving only two notes in the queue. The second minim on channel 1 now starts to play making room for the seventh minim in the queue. This enables one further quaver to be added to the

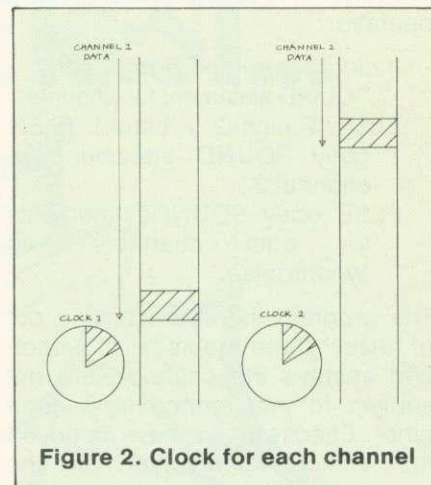


Figure 2. Clock for each channel

channel 2 queue before the program is again held up on attempting to add the eighth minim to the channel 1 queue. Thus while the second minim is being played on channel 1, only three quavers are available to be played on channel 2.

To solve this problem, we must arrange in this particular case to execute sound statements for channel 2 more frequently than for channel 1. Once the sound statement for the first note on channel 1 has been obeyed, no further channel 1 sound statements should be obeyed until sound statements have been obeyed for the first four notes on channel 2. In general, we must keep the total duration of the notes for which channel 1 sound statements have been executed approximately equal to the total duration of the notes for which channel 2 sound statements have been executed.

We could order the notes manually when transposing the music for our program, but it is more convenient to keep the two lines of a melody separate and let a program decide on the order in which to execute the appropriate sound statements. To do this, we have to keep a 'clock' running for each voice of the melody (figure 2).

In general, the current note for each channel will be in a different position in the data streams. The clocks will tend to show equal elapsed times. Each time a sound statement is obeyed, the duration of the note is added to the clock associated with that channel. At

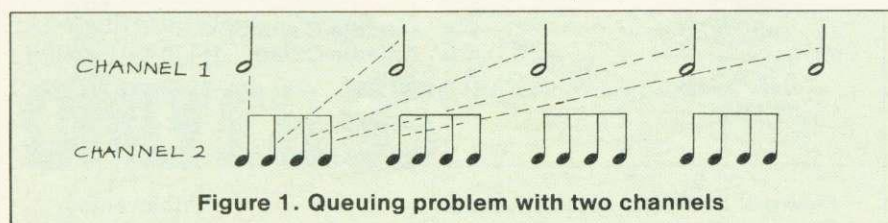


Figure 1. Queuing problem with two channels



each step we must obey a sound statement for the channel whose clock shows the least elapsed time. We require to repeat the following operation:

```

If clock1 > clock2 THEN obey
  SOUND statement for channel 1
ELSE IF clock2 > clock1 THEN
  obey SOUND statement for
  channel 2
ELSE obey SOUND statements
  for both channels and
  synchronise
  
```

The program then selects one out of these three courses of action and ensures the channels are not subject to interference from each other. Effectively we have removed the artificial connection in the parallel data streams between notes in different channels that have different duration values.

The above structure also synchronises the channels whenever the two clocks show equal elapsed time. If this was not done channels would drift apart because of the time taken by the sound generator to handle statements.

Another tedious task to be overcome before getting the machine to play arrangements is transposing from a musical score to a set of pitch numbers and associated notation. Transposing directly from the black dots to pitch numbers and durations in fractions of a second is tedious and error prone. You can write a graphics 'picking and dragging' program to input the music onto a screen stave, but we shall adopt a character convention, and list the music in data statements using figure 3. We use the North American notation for note durations because the first letters of their note names are all unique. Remember that in this notation, a semibreve is a whole note, a minim is a half note and so on.

Note that there are notes that cannot be accurately represented at this tempo. For example a dotted 1/32 is 1.5 (only 1 or 2 can be used as a duration parameter in a sound statement). Similarly a 1/16 triplet is 4/3 per note, an 1/8 triplet 8/3 per note and a 1/4 triplet 16/3 per note.

Pitch values are represented using the convention shown in figure 3. We do not cater for a key signature, but insert sharps and

► page 22

```

10 ENVELOPE 1,1,0,0,0,0,0,0,126,-4,0,-63,126,100
20 ENVELOPE 2,1,0,0,0,0,0,0,63,10,0,-63,63,110
30 ENVELOPE 3,1,0,0,0,0,0,0,126,-4,0,-63,126,100

40 DIM pitch(3,100),duration(3,100),noofnotes(3),nextnote(3),clock(3)
50 tempo=1
60 PROCinitialise(1)
70 PROCinitialise(2)
80 PROCplaytwovoices
90 END

200 DEFPROCinitialise(voice)
210 LOCAL note,pitch$,duration$,dur$,dur,notename$,position,prime$,octave
220 READ noofnotes(voice)
230 FOR note = 1 TO noofnotes(voice)
240   READ pitch$, duration$
250   dur$=RIGHT$(duration$,1) : dur=INSTR("tseqhw",dur$)
260   duration(voice,note)=2^(dur-1)*tempo
270   IF INSTR(duration$,"d") THEN
280     duration(voice,note) = duration(voice,note) * 3/2
290   notename$=LEFT$(pitch$,1)
300   position=INSTR("C-D-E-F-G-A-BR",notename$)
310   IF position=13 THEN pitch(voice,note)=255
320   ELSE pitch(voice,note)=1+4*position
330   IF RIGHT$(pitch$,1) = "#" THEN
340     pitch(voice,note) = pitch(voice,note) + 4
350   IF RIGHT$(pitch$,1) = "b" THEN
360     pitch(voice,note) = pitch(voice,note) - 4
370   prime$ = "" : octave = 0
380   FOR j=2 TO LEN(pitch$)
390     IF MID$(pitch$,j,1) = prime$ THEN octave = octave + 1
400   NEXT j
410   pitch(voice,note) = pitch(voice,note) + octave*48
420 NEXT note
430 ENDPROC

440 DEFPROCplaytwovoices
450   nextnote(1)=0 : nextnote(2)=0
460   clock(1)=0 : clock(2)=0
470   finished=0
480   REPEAT
490     IF clock(1) > clock(2) THEN PROCsound(2,0)
500     ELSE IF clock(2) > clock(1) THEN PROCsound(1,0)
510     ELSE PROCsound(1,&100) : PROCsound(2,&100)
520   UNTIL finished=2
530 ENDPROC

460 UNTIL finished=noofvoices
470 ENDPROC
480 UNTIL finished=noofvoices
490 ENDPROC

600 DEF PROCsound(voice, sync)
610 LOCAL n, envelope
620 nextnote(voice)=nextnote(voice)+1
630 n=nextnote(voice)
640 clock(voice)=clock(voice)+duration(voice,n)
650 IF pitch(voice,n)=255 THEN envelope=0
660 ELSE envelope=voice
670 SOUND sync+voice,envelope,pitch(voice,n),duration(voice,n)
680 IF n=noofnotes(voice) THEN finished=finished+1:clock(voice)=2000000
690 ENDPROC

1000 DATA 74, D'',q,G',e,A',e,B',e,C'',e,D'',q,G',e,R,e,G',e,R,e,E'',q
1010 DATA C'',e,D'',e,E'',e,F'',e,G',q,G',e,R,e,G',e,R,e,C'',q,D'',e
1020 DATA C'',e,B',e,A',e,B',q,C'',e,B',e,A',e,G',e,F'',q,G',e,A',e,B',e
1030 DATA G',e,B',q,A',h,D'',q,G',e,A',e,B',e,C'',e,D'',q,G',e,R,e,G',e
1040 DATA R,e,E'',q,C'',e,D'',e,E'',e,F'',e,G',q,G',e,R,e,G',e,R,e
1050 DATA C'',q,D'',e,C'',e,B',e,A',e,B',q,C'',e,B',e,A',e,G',e,A',q
1060 DATA B',e,A',e,G',e,F'',e,G',h,G,q
1070 DATA 38, B,h,A,q,B,dh,C',dh,B,dh,A,dh,G,dh,D',e,R,e,B,q,G,q,D',e,R,e
1080 DATA D',e,C',e,B,e,A,e,B,h,A,q,G,q,B,q,G,q,C',dh,B,e,R,e,C',e,B,e
1090 DATA A,e,G,e,A,h,F'',q,G',h,B',q,C'',q,D'',q,D',e,R,e,G',dh
  
```


Program 1. Frere Jacques

code	musical convention	duration (for reference only)	Pitch values	Pitch number
c	1/32	1	C (C below middle C)	5
s	1/16	2	C' (middle C)	53
da	dotted 1/16	3	C'' (C above middle C)	101
e	1/8	4	C'''	149
de	dotted 1/8	6	C''''	197
q	1/4	8	C'# (middle C sharp)	57
dq	dotted 1/4	12	C'b (middle C flat)	49
h	1/2	16	R rest	255
dh	dotted 1/2	24		
w	whole	32		

Figure 3. Character data convention

Pitch values

THE PROGRAM THAT'S LEAPS AHEAD OF ALL THE REST...

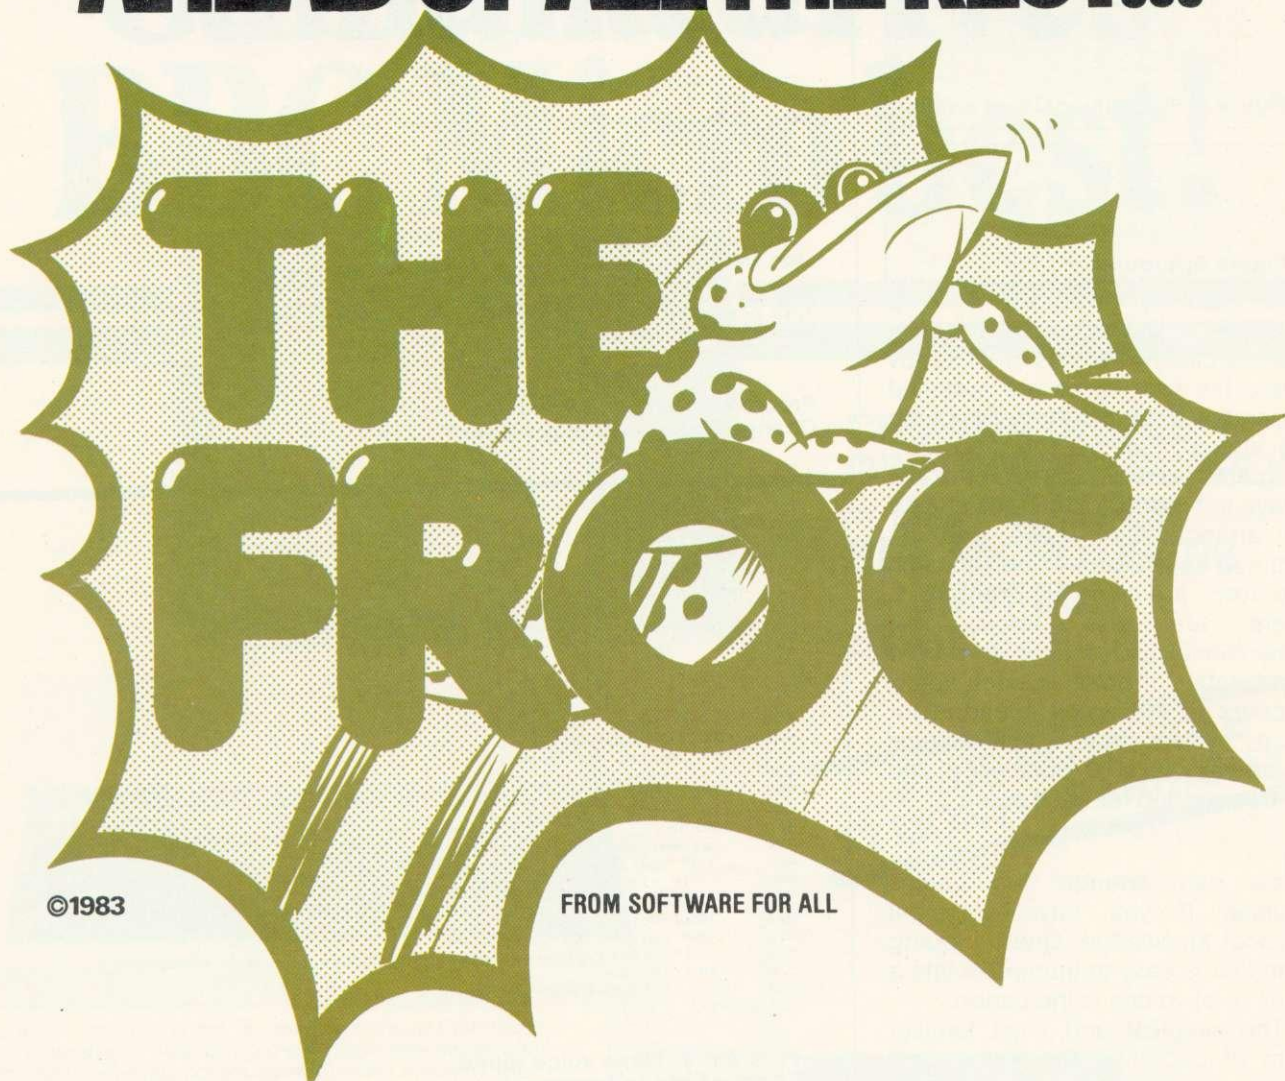

©1983

FROM SOFTWARE FOR ALL

THE MOST FANTASTIC ACTION GAME FOR THE BBC MICRO!

FAST ARCADE PLAY!
MODE 2 COLOUR GRAPHICS
AT ITS BEST!
FIVE TUNES!
INCREDIBLY ADDICTIVE!

AVAILABLE NOW
AT YOUR SOFTWARE
FOR ALL DEALER

ONLY £8.95

SEE IT NOW AT YOUR NEAREST SOFTWARE FOR ALL DEALER!

A B & C COMPUTERS
11 Brockstone Road
St. Austell
Cornwall PL25 3DW
Tel: 0726 64463

BLADEN COMPUTER SYSTEMS
22 Glynne Street
Farnworth, Bolton
Lancs BL4 4DY
Tel: 0204 794226

BYTEWARE LTD.
Unit 25
Handyside Arcade
Newcastle On Tyne
Tel: 0632 617111

CARLTON COMPUTERS LTD.
4 Swanstons Road
Gt Yarmouth
Norfolk NR30 3NQ
Tel: 0493 58898

COMPUTERS FOR ALL
72 North Street
Romford, Essex
Tel: 0708 752862

COMPUTER PLUS
47 Queens Road
Watford
Herts WD1 2LH
Tel: 0923 33927

ESSEX COMPUTER CENTRE LTD.
150 Moulsham Street
Chelmsford, Essex
Tel: 0245 358702/87969

FAREHAM COMPUTER CENTRE
56 High Street
Fareham, Hants
Tel: 0329 239191

GAMES WORKSHOP
1 Dalling Road
Hammersmith, London W6
Tel: 01-741 3445

GAMES WORKSHOP
162 Marsden Way
Arndale Centre
Manchester
Tel: 061-832 6863

GAMES WORKSHOP
Unit 37
Birmingham Shopping Centre
Birmingham B2
Tel: 021-632 4804

GAMES WORKSHOP
95 The Moor, Sheffield
Tel: 0742 750114

MANSFIELD COMPUTERS & ELEC
79 Ratcliffe Gate, Mansfield
Notts, NG18 2JB
Tel: 0623 31202

MICROSTYLE
29 Belvedere
Lansdown Road, Bath
Tel: 0225 319705

RAM ELECTRONICS
106 Fleet Road
Fleet, Hants, GU13 8PA
Tel: 02514 5858

RDS ELECTRICAL LTD.
157-161 Kingston Road
Portsmouth
Hants PO2 7EF
Tel: 0705 812478

R.M.K. ELECTRONICS LTD.
Hinton House, Station Road
New Milton
Hants, BH23 6HZ
Tel: 0425 616110

STORKROSE LTD.
44 Shroton Street
London NW1
Tel: 01-258 0409

SUPERIOR SYSTEMS LTD.
178 West Street
Sheffield
South Yorkshire, S1 4ET
Tel: 0742 755005

TECHNOMATIC LTD.
17 Burnley Road
London NW10
Tel: 01-450 1500

WATFORD ELECTRONICS
33-35 Cardiff Road
Watford
Herts WD1 8ED
Tel: 0923 40588

Distributor for Holland,
Belgium & Luxembourg:

AACKOSOFT
Postbus 3111
2301 DC Leiden
Tel: 01880 11446

**SOFTWARE
FOR ALL**
"Programs for the people"

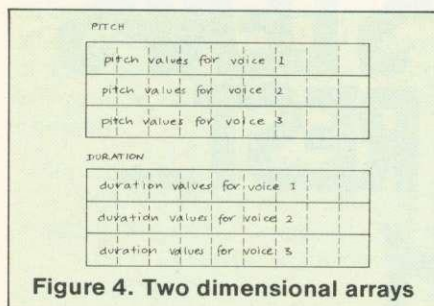


Figure 4. Two dimensional arrays

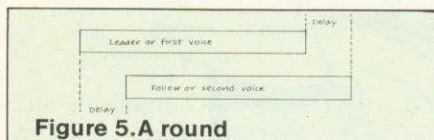


Figure 5. A round

flats explicitly. Program 1 is a complete program that can be used to play two voices of a melody where the two voices are supplied separately in data statements using the above notation. This and later programs use two two-dimensional arrays to hold up to three voices for an arrangement. These can be pictured as in figure 4. Only the first two rows are used in program 1. There are also three one-dimensional arrays used to record the number of notes in each voice, a count of the notes sounded for each voice and the 'clock' recording the total duration of the notes sounded for each voice.

You can arrange the voices yourself if you have sufficient musical knowledge. One intriguing form that is easy to transpose into a number of voices is the canon.

The simplest and most familiar form of canon is the round, and *Frere Jacques* is a common example. A theme (called the initiating voice or leader) enters. The second voice (identical to the theme in the case of a round) enters after a time interval, and the round is written so it harmonises with itself. Thus the theme performs two functions; first as a melody in its own right, and second as a harmony or counter point to itself (figure 5). Now because the follower is identical to the leader in the case of a round, or mathematically derivable from it, for canons, only one theme need be transposed into a program to play two or more voices.

Program 1 can be modified as indicated in program 2 to play *Frere Jacques* as a two voice round with a two bar delay. The procedure *PROCround* produces the two rows of our arrays necessary to play a

```
40 DIM pitch(3,100),duration(3,100),noofnotes(3),nextnote(3),clock(3)
50 tempo=2
60 PROCinitialise(1)
70 PROCround(1,2,64)
80 PROCplaytwovoices
90 END
```

```
700 DEF PROCround(leader,follower,delay)
710 LOCAL l,f
720 pitch(follower,1)=255 : duration(follower,1)=delay
730 f = 1
740 FOR l=1 TO noofnotes(leader)
750   f = f + 1
760   pitch(follower,f)=pitch(leader,l)
770   duration(follower,f)=duration(leader,l)
780 NEXT l
790 noofnotes(follower)=f
800 ENDPROC
```

```
1000 DATA 32, F',q,G',q,A',q,F',q,F',q,G',q,A',q,F',q,A',q,B'b,q,C'',h
1010 DATA A',q,B'b,q,C'',h,C'',e,D'',e,C'',e,B'b,e,A',q,F',q,C'',e,D'',e
1020 DATA C'',e,B'b,e,A',q,F',q,F',q,C',q,F',h,F',q,C',q,F',h
```

Program 2. Modified Frere Jacques.
Change these lines in program 1

```
40 DIM pitch(3,100),duration(3,100),noofnotes(3),nextnote(3),clock(3)
50 tempo = 1
60 PROCinitialise(1)
70 PROCround(1,2,64)
80 PROCround(2,3,64)
90 PROCharmonise(3)
100 END
```

```
400 DEF PROCharmonise(noofvoices)
410 LOCAL voice,slowest,sync
420 FOR voice=1 TO noofvoices
430   clock(voice)=0 : nextnote(voice)=0
440 NEXT voice
450 finished=0
460 REPEAT
470   slowest=1000000 : sync=0
480   FOR voice=1 TO noofvoices
490     IF clock(voice)=slowest THEN sync=sync+100
     ELSE IF clock(voice)<slowest THEN slowest=clock(voice):sync=0
500 NEXT voice
510 FOR voice=1 TO noofvoices
520   IF clock(voice)=slowest THEN PROCsound(voice,sync)
530 NEXT voice
540 UNTIL finished=noofvoices
550 ENDPROC
```

Program 3. Three voice round.
Change lines in program 1

round on two channels. In this procedure we effectively displace the follower by the delay where the delay is specified to the procedure in multiples of the smallest possible note (♩).

If the program doesn't sound right then you have probably made a mistake in typing the data. To check the tune through, play a single voice only using a FOR loop:

```
FOR note = 1 TO noofnotes
  SOUND 1,1, pitch (1,note),
  duration (1, note)
NEXT note
```

These three lines should replace the call of *PROCplaytwovoices*.


Contrasting envelopes can be used to effect, and we leave you to experiment with these (see *Acorn*

User March). The theme in the above program is rather banal, but it is necessary to verify your program works.

Before moving on to more complex canons, we first present a procedure to synchronise music consisting of three separate voices. In program 3, *PROCplaytwovoices* is replaced with *PROCharmonise* which can organise three voices. It could be used to play more if we had further channels available. Each execution of the repeat loop in this procedure picks out the channel or channels that have fallen behind and issues sound statements for these channels, synchronising them if appropriate.

page 24 ►

Cumana drives BBC Micro best!

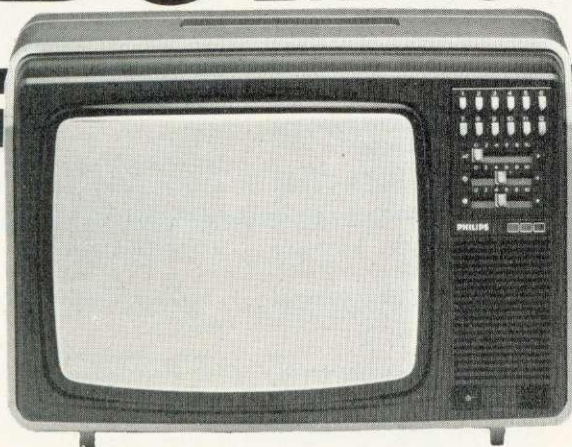

**CUMANA DRIVES +
OWN POWER SUPPLY
= BIG PLUS FOR
BBC MICRO USERS
... JUST FOR
STARTERS**

**... PLUS NO HASSLE
12 MONTH WARRANTY**

The 'ice on the cake' is that, because the Cumana Drive has its own power supply, it can be used with many other Micros when connected via the appropriate cable. Cumana supply a Drive connecting cable which has a standard 34 way edge connector plus 34 way BBC connector in the same cable length. This allows the Cumana Drive to be connected to numerous makes of micro without the need to change connecting cable. And the Japanese manufactured disk drives are quiet and utterly dependable.

CS50A	Single sided 40 track TEAC drive in a cabinet with own power supply 100K	£199
CD50A	2 single sided 40 track TEAC drives in a cabinet with own power supply 200K	£369
CS50E	Single sided 80 Track TEAC Drive with cabinet and own power supply 200K	£265
CD50E	2 single sided 80 Track TEAC Drives in cabinet with own power supply 400K	£495
CS50F	Double sided 80 Track TEAC Drive with cabinet and own power supply 400K	£345
CD50F	2 double sided 80 Track TEAC Drives with cabinet and own power supply 800K	£619
	2 drive Cable for BBC Micro	£15
	2 drive Cable for BBC Micro plus TRS80, Video, Genie etc.	£18

UPGRADE KITS

A → B

£90

CUMANA LTD

Unit 1, The Pines Trading Estate, Broad Street,
GUILDFORD, Surrey. GU3 3BH. Tel: (0483) 503121.
Telex: 859380 CUMANA.

Please add VAT to all prices

**DEALER & EDUCATIONAL ENQUIRIES WELCOME -
GENEROUS DISCOUNTS AVAILABLE**

► page 22

Program 3 will arrange and play a three voice round using the same data as before.

One of the rarest forms of canon is the crab, or canon in retrograde motion, because it is so difficult to write. There is no delay, both themes enter simultaneously. The first voice plays the theme from the start and the second voice plays it backwards (figure 6).

Bach's No 9 canon from *The Musical Offering* is a crab canon. It contains a theme with long duration notes followed by a counterpoint. The theme is played against the reverse of the counterpoint, followed by the counterpoint playing against the reverse of the theme (figure 7). Program 4 includes a procedure to generate arrays for a crab and includes data for Bach's.

In mirror canons or canons in contrary motion, the follower is derived from the leader by inverting the intervals in the leader. This means that when the leader ascends the follower descends by exactly the same interval. A familiar tune that will work as a mirror canon is *Good King Wenceslas*. A time delay of half a bar is needed between the leader and the follower.

We now look at canon No 4 from *The Musical Offering*. This is a three part arrangement, a variation of the *Royal Theme* – centre piece of the work – providing the upper voice (figure 8). The higher canonic part enters first followed by its exact inversion half a bar later (delay = eight notes).

In a mirror canon there is a common note about which the reflection occurs. In this case it is Eb (the third degree of the C minor scale – the key of the work). Thus C in the leader becomes G in the follower and vice versa. If all that is a bit technical, bear in mind that it is just a rule for deriving the first note of the follower. Once the first note of the follower is fixed we derive the remainder by inverting the intervals in the leader. The leader in this case starts as a descending sequence of tone, tone, semi-tone, tone (figure 9). The follower then begins in the octave below – an ascending sequence of tone, tone, semi-tone, tone and so on. Program 5 generates the arrays for the inverted part together with the data for the *Royal Theme* and the canon.

```
50 tempo=1
60 PROCInitialise(1)
70 PROCcrab(1,2)
80 PROCcharmonise(2)
90 END

700 DEF PROCcrab(voice,othervoice)
710 LOCAL n1,n2
720 n1=noofnotes(voice)
730 FOR n2=1 TO noofnotes(voice)
740 pitch(othervoice,n2)=pitch(voice,n1)
750 duration(othervoice,n2)=duration(voice,n1)
760 n1=n1-1
770 NEXT n2
780 noofnotes(othervoice)=noofnotes(voice)
790 ENDPROC

1000 DATA 90,C',h,E'b,h,G',h,A'b,h,B,h,R,q,G',h,F',h,F',h,E',h,E'b,h,D',q
1010 DATA D'b,q,C',q,B,q,G,q,C',q,F',q,E'b,h,D',h,C',h,E'b,h,G',e,F',e,G',e
1020 DATA C',e,G',e,E'b,e,D',e,E'b,e,F',e,G',e,A',e,B',e,C',e,E'b,e,F',e
1030 DATA G',e,A'b,e,D',e,E'b,e,F',e,G',e,F',e,A',e,E'b,e,D',e,E'b,e,F',e,G',e
1040 DATA A'b,e,B'b,e,A'b,e,G',e,F',e,G',e,A'b,e,B'b,e,C',e,D'b,e,B'b,e,A'b,e
1050 DATA F',e,D',e,G',e,D',e,C',e,D',e,E'b,e,F',e,E'b,e,D',e,C',e,B',e
e,C',e,G',q,q,E'b,q,C',q
```

Program 4. Procedure for crab canon with data for Bach.
Change program 1

```
50 tempo=2
60 PROCInitialise(1)
70 PROCInitialise(2)
80 PROCInvert(2,3,-68,16*tempo)
90 PROCcharmonise(3)
100 END

700 DEF PROCInvert(voice,othervoice,shift,delay)
710 LOCAL n1,next1,n2,lastpitchon1,lastpitchon2
720 IF delay > 0 THEN
730 pitch(othervoice,1)=255:duration(othervoice,1)=delay:n2=1
740 ELSE n2=0 :REM n2 counts notes in other voice.
750 next1=1:REM next1 is next note in voice.
760 REPEAT :REM to copy restat start and find first note.
770 IF pitch(voice,next1)=255 THEN
780 n2=n2+1:pitch(othervoice,n2)=255:
790 duration(othervoice,n2)=duration(voice,next1):next1=next1+1
800 UNTIL pitch(voice,next1)<255
810 n2=n2+1
820 pitch(othervoice,n2)=pitch(voice,next1)+shift
830 lastpitchon1=pitch(voice,next1)
840 lastpitchon2=pitch(othervoice,n2)
850 duration(othervoice,n2)=duration(voice,next1)
860 next1=next1+1
870 FOR n1=next1 TO noofnotes(voice)
880 n2=n2+1
890 nextinterval=-(pitch(voice,n1)-lastpitchon1)
900 IF pitch(voice,n1)=255 THEN pitch(othervoice,n2)=255
910 ELSE pitch(othervoice,n2)=lastpitchon2+nextinterval :
920 lastpitchon1=pitch(voice,n1):lastpitchon2=pitch(othervoice,n2)
930 duration(othervoice,n2)=duration(voice,n1)
940 NEXT n1
950 noofnotes(othervoice)=n2
960 ENDPROC

1000 DATA 22, C'',q,q,E''b,q,G'',q,A''b,q,B',q,R,e,G'',e,F'',q,F'',q,E'',q
1010 DATA E''b,dq,D'',e,D''b,e,C'',e,B',e,A'',e,G'',s,C'',e,F'',e,E'',e
1020 DATA E''b,e,D'',q
1030 DATA 45,R,s,C'',s,B'b,s,A'b,s,G',s,F',s,E'b,s,D',s,C',s,B,s,C',s
1040 DATA D',s,E'b,e,C',e,R,e,G',e,C'',s,D'',s,C'',s,B'b,s,A',s,A,s,G,s
1050 DATA A,s,B,e,G',de,G,s,A,s,B,s,C',s,D',s,E'b,s,D',s,C',e,D',e,E'b,e
1060 DATA Ab,e,G,s,D',s,C',s,B,s,R,s,F',s,E',s,D',s
1070 DATA C',dq,B,e,E'b,s,C'',s,B'b,s,A'b,s,G',s,F',s,E'b,s,D',s,C'
1080 DATA s,B,s,C',s,D',s,E'b,e,C',e
```

Program 5. Mirror canon.
Change program 1




Figure 6. Crab canon



Figure 7. Crab with counterpoint






Figure 8. Three part canon



ie a descending sequence of tone, tone, semi-tone, tone....
The follower thus begins (in the octave below):



ie an ascending sequence of tone, tone, semi-tone, tone....

Figure 9. Mirror canon

WATFORD ELECTRONICS

33/35 CARDIFF ROAD, WATFORD, HERTS. Telephone 40588

MAIL ORDER AND RETAIL SHOP. TRADE AND EXPORT INQUIRIES WELCOME. GOVERNMENT AND EDUCATIONAL ESTABLISHMENTS OFFICIAL ORDERS ACCEPTED. Carriage: unless stated otherwise, please add min. 50p to all cash orders. **VAT** APPLICABLE TO UK CUSTOMERS ONLY. ALL PRICES EXCLUSIVE OF VAT. PLEASE ADD 15% VAT TO THE TOTAL COST INCLUDING POSTAGE. SHOP HOURS: 9.00am to 5.00pm MONDAY TO SATURDAY. AMPLE FREE CAR PARKING. ACCESS ORDERS: Simply telephone through your order on Watford 50234/40589.

SPACE GAMES

ALIEN DESTROYERS (32K) £7.95
Sensational, high speed 'INVADERS' program with an abundance of features. This program has many unique extras e.g.; 'Battle Analysis' showing the number of each alien type shot down.

ASTRO NAVIGATOR (32K) £6.95
Navigate your way through a variety of treacherous caverns, inhabited by killer rockmites. There are 5 skill levels and the top 5 scores are ranked at the end. Excellent colour graphics and sound.

ASTEROID BELT (16K/32K) £7.80
A great new space game practically identical to the arcade original. An inspired piece of machine code programming producing one of the most exciting games around.

CROAKER (32K) £6.95
People—HUH! Pity us poor Frogs! Trying to hop the logs over the rivers was difficult but now the motorways. Then come the Crocodiles and diving turtles. Survival becomes just impossible. Arcade type, machine code, excellent sound and graphics.

GALACTIC COMMANDER (32K) £7.95
Nine phase aptitude test for aspiring space vehicle commanders. The program presents a real challenge and the use of machine code and hi-res graphics makes for beautifully smooth action. Great sound effects.

HITCH-HICKER (32K) £5.95
A great adventure game. Tests your skill and wits whilst trying to collect 5 objects scattered round the universe. Directions can be found in the clues.

LASER COMMAND (32K) £7.50
Classic Defence of 6 Cities against attack from Alien planets plus random bombing raids from alien spacecraft. Super fast machine code arcade game with superb sound and graphics.

MARTIANS £6.95
Very popular. Defend your planet against the descending Martians with your Force-Field but beware of the Destroyers who can annihilate you.

SPACEMAZE (32K) £6.95
You have crash landed in the legendary labyrinth of Titan, inhabited by monsters known as 'FROGS'. Find your way through to the 'TRANSMAT' before being cornered and eaten. The game has 8 levels of skill and 3D colour graphics.

SWOOP (32K) £6.95
The new GALAXIANS IT'S HERE AT LAST! Galaxian style machine code arcade game. 30 screaming, homing, bomb-dropping, explosive egg-laying BIRDMEN, swooping down in ones and twos to destroy your laser bases. The explosive eggs feature makes a normally difficult game into a challenge 'par excellence'.

TIMETREK (32K) £7.50
The ultimate 'real-time' Startrek, where indecision in the battle zone is your major enemy. 20 skill levels. Special features: PANIC BUTTON for once only space leap, New Klingon fleet after 30 Stardates and Torpedo sight control.

OTHER GAMES

ADVENTURE (16K/32K) £7.50
All the excitement, intrigue and frustration of a mainframe adventure. Explore the tortuous forests, dark caverns and castle dungeons. Great skill and imagination are required to play this game.

ZOMBIES' ISLAND (32K) £7.95
Fight for survival on an island inhabited by hungry, dangerous cannibals. An excellent BASIC and MACHINE CODE program.

CHARACTERS (16K/32K) £5.80
Makes redefining of Invaders, Foreign Characters, Technical symbols, etc.'s character shapes simpler. Clumsy binary and hexadecimal notations are not req. anymore.

CHESSE (32K) £9.95
An excellent machine code program with superb Mode 1, colour graphics. 6 levels, play black or white, illegal moves rejected, 'en passant', castling, take-back of moves and display of player's cumulative move-time.

COWBOY SHOOTOUT (32K) £6.50
Full feature, 2 Player, cowboy shooting game. Hide behind the cactus plants and moving chuck wagons until they are shot away. Shoot your opponent and avoid getting hit yourself.

ELDORADO GOLD (32K) £6.50
Legend has it that old Bill McCusky, who met a sudden death, had built up a vast treasure somewhere in the nearby territory. Can you end up rich where many have failed?

FOOTER (32K) £6.95
Another high resolution graphics game from the author of our Galactic Commander. A 2 player game in which each player has to use his football skills to try to out-run, out-dribble and finally score against his opponent. A serious contender to 'MATCH OF THE DAY'.

LOGO II £9.95
This language is now very popular in American schools as it is an ideal educational program. It can graphically demonstrate the ideas of defined procedures, sub-routines, loops and even recursive programming. Gives excellent intro to LOGO language for young and old alike.

MUNCHYMAN (16K/32K) £6.95
Colourful and highly entertaining version of the popular arcade game. Munch your way to high score before the 'MUNCHERS' devour you.

REVERSI (16K/32K) £7.80
A sophisticated multi-option game. Play against the computer or another player or even watch the computer play itself. 5 skill levels allows any player to enjoy the game without continually winning (or losing).

ROULETTE (16K/32K) £5.95
All the fun of the Casino in your own home. This is a beautifully presented game for up to 6 players. The odds are calculated according to the official rules.

SNAKE (32K) £7.80
An arcade type game. Gives hours of fun. One of the best games available for this machine. Try it for yourself.

APPLICATIONS

CONSTELLATION (32K) £6.50
The great Bear! The Southern Cross! The Horned Goat! See the night sky gloriously depicted in hi-res graphics. Constellation has been adapted and enhanced from our successful ATOM program.

DISASSEMBLER (16K/32K) £6.95
Relocatable disassembler program. Lists object code and Assembler mnemonics from and to any specified addresses. The listing can be stopped and restarted. Page mode option and output to a printer are available. ASCII symbols may be output if required. The Assembler code may be stored and modified and the program re-assembled.

FILER £8.95
A powerful file handling program for BBC. FILER allows the user to build up, manipulate, store and retrieve data on the BBC. A very powerful package indeed.

WORDWISE

Special offer only £35.00
Without doubt the most sophisticated piece of Software yet written for BBC Micro. Wordwise contains all the usual word processing features. The more complex facilities such as search and replace or file handling commands are menu driven so that even a beginner can understand how to operate them.
Wordwise will work with whatever filing system is currently implemented. Supplied with full instructions and manual.

EDUCATION

JUNIOR MATHS PACK (32K) £6.95
Makes learning fun for 5-11 year olds. This package consists of 3 programs (menu driven) that increase in difficulty as your child becomes competent. A very good supplement to standard educational methods.

WHERE? £6.95
Do you know 'WHERE?' you are? This well written program, using high resolution graphics offers timed tests on the geography of Great Britain.

WORLD GEOGRAPHY (32K) £6.95
Beautifully drawn Hi-Res colour map of the world illustrates and aids this graded series of tests on capital cities and populations of the world.




Acorn ATOM UTILITY ROM

WEROM is Watford Electronic's own most sophisticated but easy to use 4K ROM based on BASIC extension for Acorn ATOM. Plugs straight into the utility socket in an ATOM with floating point. The special features are:
High Speed Tape Interface—Memory Dump, Modify Machine code breakpoints—BASIC Error Trapping—READ, DATA and RESTORE—Full BASIC Keyboard Scanner (BBC like)—FULL Disassembler—AUTO Line Numbering—PLUS: CHAIN, Cursor Movement, Loop Aborting—Easily Extendable further. Supplied complete with instructions. £9.95

BOOKS

30 Programs—BBC Micro £ 4.95
30 Hour BASIC (BBC Micro) £ 6.00
6502 Application Book £10.25
6502 Assembly Lang. Programming £12.50
6502 Assembly Lang. Subroutines £11.80
6502 Software Design £10.50
ACORN ATOM Magic Book £ 5.50
Advanced 6502 Interfacing £10.95
ALP for the BBC Micro £ 8.95
BASIC Programming on BBC Micro £ 6.90
BBC Micro Revealed £ 7.95
Discover FORTH—Osborne £11.25
FORTH Programming (Sams) £12.50
Getting Acquainted/Acorn ATOM £ 7.95
Intro to Micro Beginners Book (3 Ed) £ 9.90
Let your BBC teach you to program £ 6.45
Micros in the Classroom £ 4.90
Practical Prog. for BBC & ATOM £ 5.95
Programming the 6502 £11.20
Mastering VISICALC (Sybex) £11.95

What do you do if your BBC Micro goes wrong?

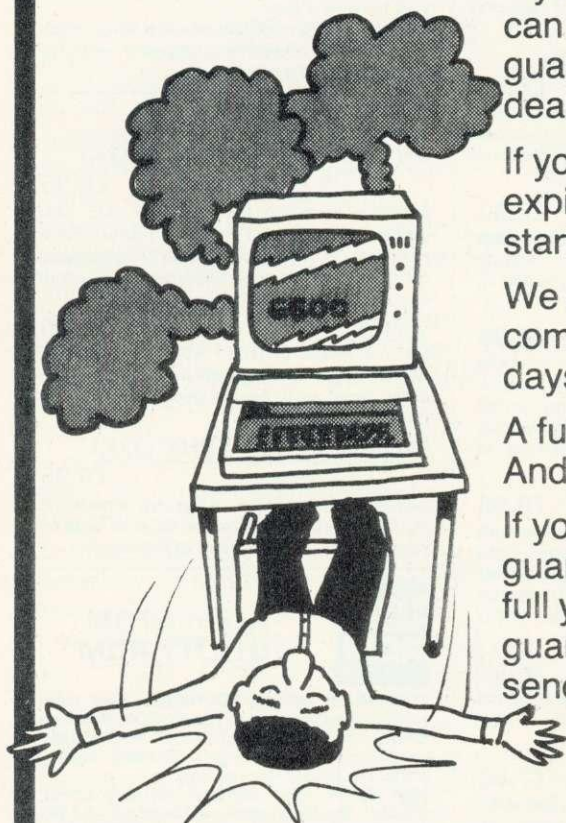

If you value your BBC Micro and your money you can now purchase extra one and two year full guarantees direct from us or via most Acorn dealers.

If your Micro is still under warranty, just fill in the expiry date on the coupon* and the guarantee will start from that date.

We carry a full stock of parts and should your computer malfunction we will repair it within five days of receipt.

A full one year guarantee costs just **£18.40**
And a full two year guarantee costs just **£27.60**

If your Micro is already faulty, and out of guarantee, we will repair it on receipt and issue a full years guarantee for **£29.90** or a full two years guarantee for **£39.10**. Please state fault when sending micro.

For you and your BBC Micro's peace of mind send the coupon today

☒ Please tick service required.

☐ I enclose **£18.40** for a full 1 years guarantee

☐ I enclose **£27.60** for a full 2 years guarantee

☐ I enclose **£29.90** for an immediate repair and a full 1 years guarantee

☐ I enclose **£39.10** for an immediate repair and a full 2 years guarantee

Surname

Initials

Address

.....
or telephone your access card number
to Madingley 210212

Access Card No

Make/Model A/B

Serial No.

Send remittance to:

**Cambridge Processor Services,
25 Parsonage Street, Dept. A
Cambridge CB5 8DN.**

Warranty Expiry*

Date / /83

If applicable

This offer applies to mainland UK only

This guarantee does not apply to major damage caused by abuse.



HOW FAST CAN A DISC DRIVE?

Joe Telford follows up his article in January's issue with a review of Cumana's disc drives. He also establishes a set of bench tests

When our friendly Editor enquired whether I would review a pair of disc drives, I eagerly accepted – with the proviso that I could produce it in my usual style, of including routines which readers could develop. The discs were from Cumana, and I already use their single, 40-track drives.

First a session on jargon. There are two main types of disc drives: hard discs and floppy discs. Hard discs are faster and store more data than floppies. They are important to business users, but expensive. Floppy discs are usually the domain of the dedicated amateur, education and small businesses. Floppy discs and their drives come in two sizes: 5¼" discs (mini-floppies), and 8" (standard floppies). Most readers will meet the mini floppy variety, which are the subject of this article. Cumana provide drives in six configurations as shown in table 1.

Twin units are simply two single drives in one case. Single-side drives will only read from the underside (opposite the label) of the disc, while double-sided drives will read from both sides. The 40-track drives can store half as much data per side as 80-track drives.

The storage which a set of drives can access will vary depending on the three parameters: single or twin drives, single or double sided, and 40 or 80 track. Table 1 shows the amount of storage for each type as well as the price of Cumana's products at the time of writing (without VAT). Cumana drives are independent of the BBC micro for power – unlike the ones sold by the

BBC. They are made by Teac in Japan.

In addition to the drives shown above, Cumana sell a 'drive to BBC' ribbon cable at £15. However, before buying discs, you must have a model B with the DFS upgrade (about £110).

On arrival, the drives lifted out of their packaging easily, and when shaken did not rattle (the first benchtest?). In addition to the drive unit, there was a connection lead, fitted with the correct BBC micro connector at one end and PCB connectors at the other. The warranty sheet and a sheet of instructions were included but no disc manual, or formatting disc. Both these items are vital for using discs. Cumana were unable to supply discs and manuals, but are writing their own manual and producing a disc containing a formatting program. Acorn sell copies of the manual and format disc (which come with BBC disc drives free of charge) for £30.

The casing of the Cumana unit matched the BBC micro's, as did the stippled finish. Two screws had to be removed from the casing to allow the lead to be connected at the drive end. This was simply a matter of pushing the connector firmly into place as per instructions.

Unlike my original unit, no adjustment to the switches on either drive's circuit board was required. Nor was there any need to fit or alter a white terminating resistor block. On my 40-track drives, these tasks had taken some thinking through, though it would appear that the present drives are completely set up. Once the cover was replaced, a mains plug had to be fitted and the unit was ready for operation.

To test the unit in the same conditions as my older drives, it was pressed into daily service producing programs for the MEP primary software packages. This meant the unit was often working for over eight hours a day.

Benchmarking is the process of providing a set of standard tests to enable comparisons to be made between the performances of different devices. In our case we aim to compare disc drives, and suitable benchtests might be those which enable the comparison of speed of access and integrity of data transfer.

Benchtests of access time depend upon two main variables, the actual drive in use and the micro's software. In the case of the BBC micro this is the DFS software. There are a number of variations of the disc filing system (DFS) among our readers, varying from DFS 0.90, (the earliest system on general release) through DFS 0.97 and 0.9A, up to DFS 0.9E which is the latest recorded version (Jan 83). To thoroughly test the two discs, benchtests were carried out three times, using combinations of DFS0.97, DFS0.9A, DFS0.9E, OS1.00 OS1.20, Basic V1, and Basic V2.

When considering suitable benchmarks, we can separate them into two types: access times for saving – loading programs, and times for accessing data files in various ways ie, creating, writing and reading.

First, consider benchmarks for
page 30 ►

Single unit, single side, 40 track	£199	100k	(25 pages of A4 approx)
Twin unit, double side, 40 track	£369	200k	(50 pages of A4 approx)
Single unit, single side, 80 track	£265	200k	(50 pages of A4 approx)
Twin unit, single side, 80 track	£495	400k	(100 pages of A4 approx)
Single unit, double side, 80 track	£345	400k	(100 pages of A4 approx)
Twin unit, double side, 80 track	£619	800k	(200 pages of A4 approx)

Table 1. Configuration and costs of Cumana disc drives

It can do a powerful job for you

Buy just any two programs at £19.95
and take one at £19.95
FREE!



New One of the most innovative business programs on the market. Most serious accountancy packages are written and coded by professional and competent programmers. The Gemini Cashbook Accounting program was written by practising Chartered Accountants and coded by professional and competent programmers. This is a fundamental difference.

This practical program is simple to use and will replace your manual cash and bank records and by giving you instant management information, it may even put your accountant out of job!

With exceptionally exhaustive user documentation, full technical back up and product update policy this program will increase the efficiency and profitability of your business. Take a look at the information this program will provide.


- * summary of VAT information to enable you to complete your VAT returns
- * cumulative receipts and payments report analysed over the standard profit and loss and balance sheet heading.
- * option for departmental analysis of sales and purchases
- * print out of all transactions
- * journal routine for entering transfers between accounts and year end adjustment for debtors, creditors etc.
- * year end trial balance
- * profit and loss account and balance sheet.

These statements can be produced at what ever interval you require e.g. monthly, quarterly or annually.

Coming soon:— Integrated Sales + Purchase Ledgers

"Gemini's range of software is in the vanguard of the releases for 'serious' micro users . . ."

(Which Micro and Software Review)

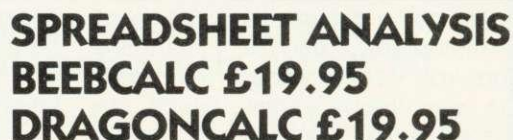

FOR BBC AND DRAGON 32. Spreadsheet processors have proved to be important tools for using micros in business, scientific and domestic financial applications.

Without any programming knowledge at all, you may:—

- * Set up a computerised spreadsheet, with chosen row and column names.
- * Specify formulae relating any row or column to any other.
- * Enter your source data and have the results calculated.
- * Save the results on tape (or disk – BBC) for later reloading and manipulation.
- * Print the tabulated results in an elegant report format.
- * Experienced users may access saved files and write their own reporting or graphics presentation programs for the results.

Some typical applications:—

- * Small business accounting applications, e.g. profit and loss statements and cashflow projections, break-even analyses etc.
- * Investment project appraisal – anything from double glazing to oil rigs!
- * Comparing rent/lease/buy options
- * Processing the results of scientific experiments or field studies
- * Engineering calculation models
- * In fact, anything that involves repeated re-calculation of results presented in tabular or spreadsheet format.

Program Availability Chart:—

	Database	Stock Control	Mailist	Invoices & Statements	Spread sheet Analysis	Cashbook Accounting	Word processor	Home Accounts	Commercial Accounts
Sinclair Spectrum 16k or 48k	●	●	●					●	●
Dragon 32k or 64k	●				●			●	
VIC20 (16k +)	●	●	●	●				●	●
Sinclair ZX81 (16k +)	●								
Grundig Newbrain	●								
Texas T199 4A	●								
Atari 400/800 or Osborne 1	●								
Sharp MZ80A	●	●	●	●				●	●
Sharp MZ80K	●	●	●	●				●	●
Sharp MZ80B	●	●	●	●				●	●
BBC micro model A or B 32K	●	●	●	●	●	●		●	●

"... the systems worked immaculately when tested ..."

"Mailist is a very professional piece of software . . ."

(Which Micro & Software Review Feb 83)

IT'S NEW ACCESS SOFTWARE for business at petty cash prices.



INVOICES AND STATEMENTS . . . £19.95

Compatible with most micros. See table. Ideal for the small business. A complete suite of programs together with generated customer file for producing crisp and efficient business invoices and monthly statements on your line printer. All calculations include VAT automatically, and the program allows your own messages on the form produced. This program gives you superb presentation and saves time on one of the most tedious tasks in the office.



COMMERCIAL ACCOUNTS . . . £19.95

Compatible with most micros. See table. A gem of a program, all for cassette, with the following features:— Daily Journal. Credit Sales. Cash Sales. Credit Purchases. Purchases — other. Sales Ledger. Purchase Ledger. Bank Account. Year to date summary. A fully interactive program suitable for all businesses. Files can be saved and loaded and totals from one file carried forward to another on cassette. Particularly useful from a cash flow point of view, with an immediate accessibility to totals for debtors and creditors. Bank totally supported with entries for cheque numbers, credits and, of course, running balance.



MAILING LIST . . . £19.95

Compatible with most micros. See table. A superb dedicated database to allow for manipulations of names and addresses and other data. Gemini's unique 'searchkey' system gives you a further ten 'user-defined parameters' to make your own selections. Features include the facility to find a name or detail when only part of the detail is known, it will print labels in a variety of user specified formats.



DATABASE . . . £19.95

Compatible with most micros. See table. The program that everyone needs, the most valuable and versatile in your collection. Facilities include sort search, list print if required. Can be used in place of any card index application; once purchased you can write your own dedicated database to suit your particular needs with a limitless number of entries on separate cassettes.



STOCK CONTROL . . . £19.95

Compatible with most micros. See table. Dedicated software with all that's necessary to keep control of stock. This program will take the tedium out of stock control and save time and money. Routines include stock set up, user reference number, minimum stock level, financial summary, line print records, quick stock summary, add stock, delete/change record and more.



HOME ACCOUNTS . . . £19.95

Compatible with most micros. See table. Runs a complete home finance package for you with every facility necessary for keeping a track of regular and other expenses, bank account mortgage, H.P. etc. This program also allows you to plot graphically by Listograms your monthly outgoings.



WORD PROCESSOR . . . £19.95

Compatible with most micros. See table. This program features routines found in much larger and more expensive packages with a typical word length of 5-6 letters it allows for around 1000 words in memory at one time. Ideal for the user who requires a simple program to write letters on his computer. Features include, block delete, block insert, search and replace, edit text, display text and more.

Dealer/Trade enquiries invited — generous trade discounts for quantity
Special ACCESS card instant sales hotline **Tel: 03952-5165**
for GUARANTEED despatch within 24 hours . . .

24 hr Ansaphone Service.

All enquiries other than credit card sales to 03952-5832

Gemini. Functional Software Specialists. 9, Salterton Road, Exmouth, Devon.

Tick the box for Program you require. Prices include V.A.T. and Package and Postage.
Please supply the following cassette software.

Database	£19.95	<input type="checkbox"/>	ZX81 16K Database	£9.95	<input type="checkbox"/>
Stock Control	£19.95	<input type="checkbox"/>	BBC Cash Book disk or tape	£95.00	<input type="checkbox"/>
Mailing List	£19.95	<input type="checkbox"/>	BBC Disks — other titles	£23.95	<input type="checkbox"/>
Invoices and Statements	£19.95	<input type="checkbox"/>	Osborne Disk Database	£23.95	<input type="checkbox"/>
Commercial Accounts	£19.95	<input type="checkbox"/>	Word processor	£19.95	<input type="checkbox"/>
Home Accounts	£19.95	<input type="checkbox"/>	Beebocalc	£19.95	<input type="checkbox"/>
			Dragoncalc	£19.95	<input type="checkbox"/>

Name _____

Address _____

Machine Type _____

Memory Size _____

I enclose _____

Make cheques and postal orders payable to Gemini Marketing Ltd.

Diners Card Number _____

Access Number _____



Signature _____

Gemini. Functional Software Specialists, 9 Salterton Road, Exmouth, Devon EX8 2QG



AU4


```

1 REM Benchmark 1a  *SAVEing
5 P."BM1A"
10 TIME=0
20 *SAVE"BM1A" 2000 4400
30 PRINT TIME
40 END

```

Program 1. Benchmark 1a

```

10*KEY9 P."BM1B":TIME=0:P.TIME!
M*SAVE"BM1B"!MP.TIME!M

```

Program 2. Benchmark 1b

```

10*KEY8 P."BM1C":TIME=0:P.TIME!
M:*SPOOL"BM1C"!MLIST!
M*SPOOL!MP.TIME!M

```

Program 3. Benchmark 1c

```

1 REM benchmark 2a:
  *LOADing Memory
5 P."BM2A"
10 TIME=0:PRINTTIME
20 *LOAD"BM1A"
30 PRINTTIME
40 END

```

Program 4. Benchmark 2a

```

10*KEY7 P."BM2B":TIME=0:P.TIME!
M*LOAD"BM1B"!MP.TIME!M

```

Program 5. Benchmark 2b

```

10*KEY6 P."BM2C":TIME=0:P.TIME:
*EXEC"BM1C"!MP.TIME!M

```

Program 6. Benchmark 2c

accessing program files.

Benchmark 1a: SAVEing memory examines the time taken to save an amount of memory to disc. *SAVEing is normally done to save machine language programs or screen memory and a suitable program is shown as program 1. This will *SAVE &2400 bytes of memory to disc (9k) of memory.

If we replace line 20 with:

```
20 *SAVE"BM1A" 2000 3400
```

we can *SAVE 5k of memory. It is important to perform each benchmark with two separate amounts of memory, because we can apply some simple maths to find out two useful pieces of information about our discs, the save load timings per k of memory (or per record) and the time overhead involved before transfer can begin (this process will be explained in the next section). I decided to compare results based on 5k and 9k of memory because I had two programs of exactly those lengths.

Benchmark 1b was designed to test saving Basic programs (program 2). It is loaded as a Basic program and run and uses function key 9. Once this is done, the user loads a second basic program which is saved by pressing f9. The time to save this second program is the benchmark 1b.

Benchmark 1c is for *SPOOLing Basic programs and is also loaded as a Basic program. On running, it allocates function key 8. The user may then load a further Basic program. The time to *SPOOL this second program is benchmark 1c. Again this benchmark is run with 5k and 9k programs.

With *SPOOLing however, benchmarks depend upon yet another factor. This is because programs in memory are tokenised, so that reserved words are found as single bytes and also some numbers eg those in GOTO statements are found to have special encoded formats (User Guide, p483). During *SPOOLing a Basic program, the tokens and encoded numbers must be converted to ASCII, which is performed by the LIST command. The length of time for *SPOOLing thus depends upon frequency and expanded length of the tokenised keywords. In addition, because listing is effectively printing, the *SPOOL benchmark will be further slowed.

The second set of benchmarks allows users to compare retrieval rates for programs, in their three forms: memory, Basic programs, and EXECuable programs.

Benchmark 2a uses program 4 and tests *LOADing memory. It *LOADS the section of memory *SAVED in Benchmark 1a.

Benchmark 2b: LOADing Basic programs. Program 5 is loaded, then run. It allocates itself to function key 7. Pressing f7 will reload the Basic program saved in Benchmark 1b, and the time taken to do this is Benchmark 2b.

Benchmark 2c tests *EXECing Basic programs. It is based on program 6 which is loaded and run. It allocates itself to function key 6. Pressing f6 will EXEC the ASCII version of the Basic program *SPOOLED in Benchmark 1c. The time taken to do this is Benchmark 2c. As with benchmark 1c, this involves screen listing, as well as tokenising. This means we would expect it to run relatively slowly in comparison with 2a and 2b.

The second main area to examine is that of data transfer to and from files. Data files on the BBC micro may be sequential (serial) or random (direct) access. Serial files are encountered by users, as they are relatively easy to use, although access files are more flexible.

Benchmark 3a: writing to a serial file. Load and run program 7 to create the string R\$ which is 254 bytes long. This will transfer to disc as 256 bytes, as each string is prefixed with a byte indicating it is a string, and a byte indicating the length of the string. In these datafile benchmarks we will work to one record per sector (256 bytes). Line 40 creates the data file, and lines 50 to 70 write 100 records to the file. Line 80 closes the file, and completes the benchmark. The program can be rerun with line 50 altered to give 20 records, so we can again calculate overheads and transfer time per record.

Benchmark 3b: Writing records to a random access file. Program 8 does not create the environment of its data file. This can be done previously by either creating a serial file of the appropriate size, or by *SAVEing an appropriate amount of memory, with a suitable filename. This benchmark simply

writes 100 records to that already created file. Each record may have a maximum length of 255 bytes. The program up to line 100 is similar to program 7, except that line 60 contains a reference to procedure 'putstring' defined in lines 110 to 170. It takes any string sent to it plus a start point in the file, and puts bytes from the string into the file sequentially from the start point. The value of using such a procedure 'putstring' defined in lines usable in applications programs and so gives a more realistic benchmark.

Line 50 can be altered to write 20 records, and the two benchmarks used to determine overheads and transfer time per record. Notice line 40 is an OPENIN command which is necessary in Version 1 of Basic. OPENOUT you will remember, initially destroys the named file.

Benchmark 4a: reading from a serial file. Program 9 reads 100 records from a previously created file (you could use a file created with program 7), and closes the file. If users create files which will fit into memory, then serial input may be used to improve access times – once the file is in core!

Benchmark 4b: reading from a random access file uses program 10 and is the last of the access time tests. It reads 100 records from a random access datafile. It is similar to the previous program except we replace INPUT# with the function of line 50. This function is defined after line 1100. The function has the start position in the file of the required string passed to it, as well as the length of the string. The function gets bytes from the file of the required string passed position, and assembles them into a string, which it returns to the main body of the program. Users may find this function useful when accessing their own random access files.

As I have already mentioned, users can perform each benchmark with two different amounts of data or program to transfer. It would then be possible to compare results and to develop two formulae which model the disc access time.

For 9k:

disc overhead + 9 x time per k = time for 9 k

and for 5k:

disc overhead + 5 x time per k = time for 5k

Representing this symbolically we get

$$\begin{aligned} D + 9k &= T1 \\ D + 5k &= T2 \end{aligned}$$

Therefore:

$$4K = T1 - T2$$

and

$$K = (T1 - T2)/4 \text{ (Time per k less disc overheads.)}$$

From this we can say

$$D + 5(T1 - T2)/4 = T2$$

and so

$$D = T2 - 5(T1 - T2)/4$$

or

$$D = (9T2 - 5T1)/4 \text{ (Disc overhead time.)}$$

Similarly we can produce results for the time taken to write or read a record.

Transfer time per k is quite understandable, but the term disc overhead is not as easily followed.

Disc overhead refers to that part of the access time which is devoted to bringing the discs up to speed and finding the part of the disc allocated to the program to be loaded or saved.

The benchmark results following are all based on two different program or file lengths and using the above formulae the overheads and time per k are given.

To produce comparable results over the whole group of benchmarks, the program was saved, and each file was written to a newly formatted disc. Thus the benchmarks are timings based on writing information to the beginning of a disc. Users may wish to compare these times with access to the middle tracks or final tracks.

There was also a problem in timing the benchmarks, as over 10 repeats of any one benchmark the final time varied by 0.2s from the value entered into the tables. This means there is a small error in some calculations. A real time clock which could be connected to the BBC micro, and not be affected by disc access would be a boon to benchmarkers.

The benchmarks in tables 2, 3, and 4 should allow users to make

```
10 PRINT"BM3A"
20 R$=STRING$(254,"?")
30 TIME=0:PRINTTIME
40 file=OPENOUT"BM3A"
50 FOR X%=1 TO 100
60 PRINT#file,R$
70 NEXT
80 CLOSE#file
90 PRINTTIME
```

Program 7. Benchmark 3a

```
10 PRINT"BM3B"
20 R$="3"+STRING$(254,"B")
30 TIME=0:PRINTTIME
40 file=OPENIN("BM3A")
50 FOR Y%=0 TO 99
60 PROC_putstring(R$,Y%*256)
70 NEXT
80 CLOSE#file
90 PRINTTIME
100 END
110 DEFPROC_putstring(A$,start)
120 LOCAL X%
130 PTR#file = start
140 FORX%=1 TO LEN(A$)
150 BPUT#file,ASC(MID$(A$,X%,1))
160 NEXT
170 ENDPROC
```

Program 8. Benchmark 3b

```
10 PRINT"BM4A"
20 TIME=0:PRINTTIME
30 file=OPENIN"BM3A"
40 FOR X%=1 TO 100
50 INPUT#file,R$
60 NEXT
70 CLOSE#file
80 PRINTTIME
```

Program 9. Benchmark 4a

```
10 PRINT"BM4B"
20 R$="3"+STRING$(254,"B")
30 TIME=0:PRINTTIME
40 file=OPENUP("BM3A")
50 FOR Y%=0 TO 99
60 R$=FN_getstring(Y%*256,255)
70 NEXT
80 CLOSE#file
90 PRINTTIME
100 END
110 DEF FN_getstring(start,length)
111 LOCAL X%,B$
112 PTR#file = start
113 B$="":FORX%=1 TO length
114 B$=B$+CHR$(BGET#file)
115 NEXT
116 =B$
```

Program 10. Benchmark 4b



80 track	40 track
Wabash	Wabash
	Accutrack
Nashua	Nashua
	Maxell
	Control Data
	Inmac

Table 5. Types of discs used

comparisons between the two types of drive tested, as well as between variations of the BBC micro's operating system.

A range of discs were used with both types of drive, although I tried to match 80-track discs with the 80-track drive (rather than double density discs, which are also available). Table 15 shows a list of discs which were used with the two drives. All the discs have worked without failing, for up to six months, although I tend to use Wabash or Nashua regularly, and my oldest disc is from Inmac.

So, what do I like about the drives?

- Reliability, particularly after six months, hard use of the 40-track versions.
- Quietness of operation. The 80-track versions were particularly silent.
- Construction of the entry doors, with marked door locks.
- Facility to accept auto boot on power on (more of an Apple standard).

However, what else do I dislike?

- Casing vents could let liquids, such as coffee, enter.
- The on/off switches were rather small and could be a source of trouble.
- Some drives (not Cumana) allow 40 to 80 track switching, which would be very useful.
- Although neat and well packaged, the drives are bulky, particularly for home use.

All in all a rather useful selection of disc drives, although I think disc usage is so important that the costs such as coffee, enter.

Next month: Our normal H&T format with a selection of applications for functions and procedures.

Benchmark	Description	5k or 20 records	9k or 100 records	Disc overhead time	Time per k or per record
1a	*SAVE memory	1.7	2.1	1.2	0.1
1b	SAVE Basic program	1.6	2.0	1.1	0.1
1c	*SPOOL Basic program	12.8	22.4	0.8	2.4
2a	*LOAD memory	1.3	1.6	0.9	0.1
2b	LOAD Basic program	1.5	1.9	1.0	0.1
2c	*EXEC Basic Program	12.7	21.9	1.2	2.3

All records use 256 bytes of disc space.
Benchmark 3a is used to create files for use in random access.

3a	PRINT# a serial file	6.1	25.3	1.3	0.24
3b	BPUT# using PTR#	57.1	281.2	1.1	2.81
4a	INPUT# serially	5.3	23.4	0.8	0.23
4b	BGET# using PTR#	37.5	183.5	1.0	1.83

Table 2. Benchmarks for 80-track Cumana drives. BBC micro with DFS 0.9E, OS1.2, Basic V2

Benchmark	Description	5k or 20 records	9k or 100 records	Disc overhead time	Time per k or per record
1a	*SAVE memory	1.7	2.1	1.2	0.1
1b	SAVE Basic program	1.7	2.1	1.2	0.1
1c	*SPOOL Basic program	12.8	22.2	1.0	2.4
2a	*LOAD memory	1.5	1.9	1.0	0.1
2b	LOAD Basic program	1.5	1.9	1.0	0.1
2c	*EXEC Basic program	12.4	21.6	0.9	2.3

All records up 256 bytes of disc space.
Benchmark 3a is used to create files for use in random access.

3a	PRINT# a serial file	6.0	25.2	1.2	0.24
3b	BPUT# using PTR#	56.8	281.1	0.8	2.8
4a	INPUT# serially	5.3	23.6	0.8	0.23
4b	BGET# using PTR#	37.3	182.6	1.0	1.82

Table 3. Benchmarks for 40-track Cumanas. BBC micro with DFS 0.9E, OS1.2, Basic V2

Benchmark	Description	5k or 20 records	9k or 100 records	Disc overhead time	Time per k or per record
1a	*SAVE memory	1.8	2.0	1.55	0.05*
1b	SAVE Basic program	1.7	2.1	1.2	0.1
1c	*SPOOL Basic program	12.8	22.2	1.0	2.4
2a	*LOAD memory	1.7	1.9	1.45	0.05*
2b	LOAD Basic program	1.7	2.1	1.3	0.075*
2c	*EXEC Basic program	12.2	21.4	0.7	2.3

All records use 256 bytes of disc space.
Benchmark 3a is used to create files for use in random access.


3a	PRINT# a serial file	5.9	25.3	1.0	0.24
3b	BPUT# using PTR#	57.0	281.3	1.0	2.8
4a	INPUT# serially	5.5	25.3	1.0	0.23
4b	BGET# using PTR#	37.4	182.6	1.0	1.82

The accuracy of these figures is open to question because of problems using the BBC clock.

Table 4. Benchmarks for 40-track Cumanas. BBC micro with DFS 0.97/9A, OS1.0, Basic V1



MYSTERIOUS ADVENTURES



FOR BBC MICROCOMPUTER MODELS A & B*

Join the growing band of Adventurers who are enjoying these absorbing and stimulating programs. Step into another world of Fantasy, Magic, Mystery and Sorcery. Only your wits and cunning can ensure success in these scenarios!



● WRITTEN IN
ULTRA-FAST
MACHINE CODE.

● SAVE GAME
FEATURE.

● SPLIT SCREEN
DISPLAY.

1. THE GOLDEN BATON — Venture into a strange province of Sorcery and Evil Magic to recover the Golden Baton, a priceless artifact whose powers are said to bring great Health and Prosperity to the Land.
2. THE TIME MACHINE — As a Newspaper reporter you are sent to investigate the eccentric professor who lives in the old house on the Moors. What is his secret and why is his house now deserted?
3. ARROW OF DEATH (Pt. 1) — A blight has fallen on your homelands, the Baton has become tarnished and now radiates a malevolent aura of Evil. Your mission is clear — trace the source of this Evil and destroy... or be destroyed. This is the first part of an Epic Adventure although each part can be played as a stand alone scenario.
4. ARROW OF DEATH (Pt. 2) — You now have the means to destroy your enemy... but you are far from home and this land is strange to you. Can you cope with the deadly perils which approach you and have you the strength to see your mission through to the final conflict?
5. ESCAPE FROM PULSAR 7 — Alone on a gigantic Space-Freighter... The rest of your crew have died horribly at the hands of a mutated Zoo-Specimen. Your only chance of escape is to reach the Frail Shuttlecraft. But the lurking Monster is hungry and you are the only food it has left.
6. CIRCUS — Your Car has run out of Petrol on a lonely road miles from habitation. As you trudge reluctantly down the road in search of help you are suddenly confronted by an amazing sight... in a nearby field is a Huge Circus tent! But this is no ordinary Circus as you will soon discover...
7. FEASIBILITY EXPERIMENT — Far across the gulfs of time and space, a dying race of super-intelligent beings search the Universe for a Hero to save their existence... At length their thoughts turn to planet Earth. You are chosen to be their saviour in a bizarre scenario where death is a mere thought away...
8. THE WIZARD OF AKYRZ — You are in the Royal Palace. The King beseeches you to rescue his daughter from the evil wizard. If you succeed your reward will be priceless... failure will bring certain death.
9. PERSEUS AND ANDROMEDA — Travel into the realms of ancient mythology. Battle with grotesque monsters and supernatural powers as you search for the hidden secrets of myth and legend.
10. TEN LITTLE INDIANS — This mystery begins with a train journey into a strange country. What secrets are held by the strange country mansion? What meaning is attached to the strange idols? Maybe you will find out if you live long enough...

*Adventures 5-10 require 32K RAM

Each adventure comes attractively packaged for just £8.95 inc.

Now in stock for ATARI 400/800 £12.50

Available soon for ZX SPECTRUM, ZX81 (16K), APPLE II.



SEND CHEQUE OR P.O. TO:

**DIGITAL
FANTASIA**

DEPT ACU,


24 NORBRECK ROAD, NORBRECK, BLACKPOOL, LANCASHIRE.

Tel: (0253) 56279

Draw with the BBC micro and show the true potential of your machine

Fill shapes in one of 23 colours (Mode I)
Draw points, lines, rectangles, ellipses and circles
Smooth curves
Wire frame diagrams
Hidden line removal
Draw in perspective
Measure scaled distances
Ekta sketch lines, Half tone facility
Mirror images
Repeat images, SS, enlarged, reduced, stretched
Actual colour displayed
Store up to 10 ellipses or circles in memory
Redraw any one of these at cursor position
Change any actual colour for one of 8 others
Clear screen, load screen, save screen
Print characters or numbers at any pixel point
Error messages for incorrect input
Fully comprehensive manual

356 496 *  ***
3

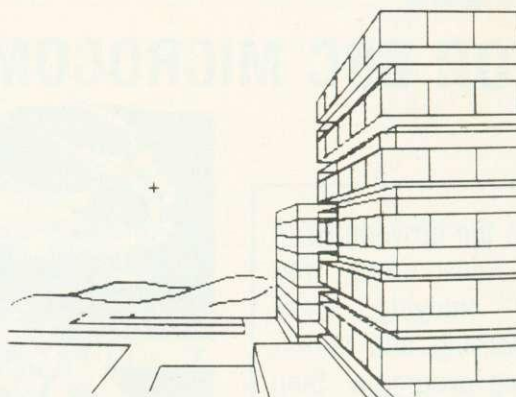

This programme has been purpose designed by professional Graphic Designers for simplicity and ease of use, and is undoubtedly the most versatile drawing programme on the market at this time. There is no need to input any numerical data, as all judgements are made visually. The BBC Micro is the finest drawing machine in its price range. Find out what it can do.

The A.B. Designs drawing programme costs only £35 for over 70 functions (Model B). When ordering send Cheque/PO and include 50p for P&P. Please include phone no. with all correspondence. For further information send SAE and phone no. to A.B. Designs, 81 Sutton Common Road, Sutton, Surrey. 01-644 6643 (closed all day Thursday).

BUY THE BEST BRITISH COMPUTER

As supplied to schools,
local authorities and
government departments
by the leading BBC/Acorn
dealer & service centre

In stock now:

BBC Model A & B

- + Wordwise Word Processor (needs 1.0 System)
- + Acorn Software - Cassette & Disk
- + Disk Drives - 100K Single, 800K Twin
- + Joysticks for the BBC

SPECIAL OFFER

Valid until April 30th

Screen Layout Pad
Flow Chart Pad &
Symbol Design Pad
Complete kit
with ring binder
Rec. Retail Price:
£15.50
Our Price only
£12.50 incl. VAT

PLUS computers, peripherals, printers, software, games, books and much, much more from leading makers at low prices - always available from your local stockist:

TWICKENHAM
COMPUTER CENTRE LTD 
72 Heath Rd Twickenham Middx TW1 4BW (01-892 7896/01-891 1612)
OFFICIAL STOCKISTS



BBC MICRO



TOP OF FILE

WORD PROCESSOR and FULL SCREEN EDITOR

- * 50 full-screen functions for creating, checking and modifying both programs and documents
- * Prints justified text on option
- * Special features for EPSON, but print controls may be tailored by user for other printers
- * BASIC programs may be edited and run with or without using tape. Multiple small programs can be stored in memory at any one time.
- * Build program or document from separate components
- * Recover after "Bad Program" errors
- * Functions include insert mode, search, global change, block operations plus many more
- * Supplied with detailed documentation
- * It produced this advertisement. Tape and disk versions for BBC 32k are available NOW
- * Some advantages over ROM based products

Tape version £18. Tape AND disk versions £21.
SAE for details to:-

STABLE SOFTWARE, Millsail House,
Gt. Saxham, Bury St. Edmunds,
Suffolk. Tel: 0284-810081

BOTTOM OF FILE



In an earlier article (December 1982) `USR` and `CALL` were used for transferring program control to a machine code program. Both were also used for passing information from the variables `A%`, `X%`, `Y%` and `C%` to the accumulator, `X` register, `Y` register and carry flag respectively. Furthermore, `USR` was shown to be capable of receiving data from these 6502 registers when control returned to Basic. The data is assigned to a variable defined when the machine code routine was called, eg to `M%` in the statement `M% = USR(MCROUTINE)`.

When more information is required by the machine code program than can be directly passed via the registers, `CALL` must be used. The information to be passed is indicated by the variable names accompanying the `CALL` statement. For example:

```
CALL &2000, Q%, R%
```

The address of each parameter is passed in a parameter block starting at `&0600`. After a `CALL` statement has been executed the contents of the parameter block give the addresses of any variables supplied with the `CALL` statement (figure 1).

For string variables the parameter address points to a string information block containing:

byte 1	low byte of string address
byte 2	high byte of string address
byte 3	number of bytes allocated to string
byte 4	current length of string

The listings in figure 2 illustrate the structure of the parameter block by 'passing' two variables `T%` and `A$` in the `CALL` to `&FFEE`. (The routine at `&FFEE` (`OSWRCH`) makes no use of this information.)

The first listing gives the contents of the parameter block:

2-	number of parameters
50-	address of <code>T%</code> (<code>&0450</code>)
4-	
4-	parameter type (4 - integer)
C6-	address of <code>A\$</code> information block (<code>&0EC6</code>)
E-	
S1-	parameter type (<code>&81</code> - string variable)

One program follows up the pointer to `T%` revealing the current value of this integer variable (`&00112233`).

The other programs show that finding the string variable is a two-

Tony Shaw and John Ferguson round off their series on machine code by considering the powerful `CALL` statement

CALLING ALL MACHINE CODES

0600 - number of parameters	**The codes used to define parameter type:
0601 - low byte of address of first parameter	0 - 8 bit byte (eg ?X)
0602 - high byte of address of first parameter	4 - 32 bit integer variable (eg X%)
0603 - code defining parameter type**	5 - 40 bit floating point number (eg Y)
0604 - low byte of address of second parameter	&80 - string at a defined address (eg \$A)
0605 - high byte of address of second parameter	&81 - string variable (eg A\$)
0606 - code defining parameter type etc **	

Figure 1. Parameter block at `&0600`

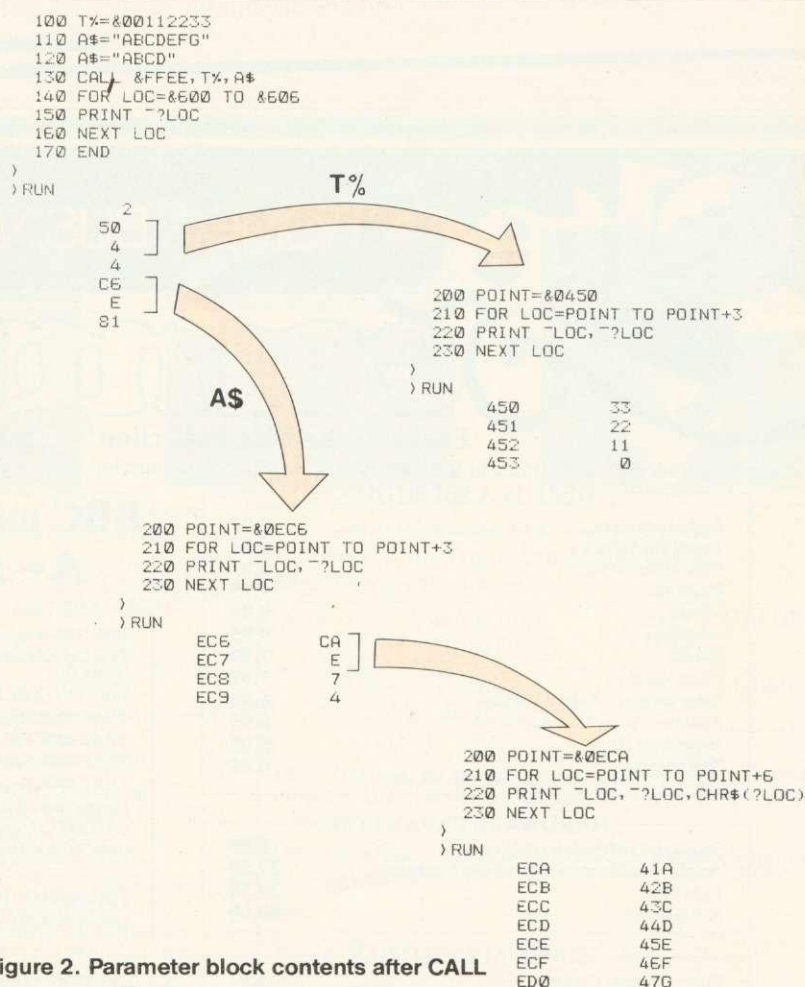


Figure 2. Parameter block contents after `CALL`

stage process - finding the string information block, and then the value of `A$`. Within the original program the value of `A$` was

changed to illustrate that the string information block is required for determining the current length of `A$` as some of the previous version


```

> RUN
000000000000000000000000000000001001          9
000000000000000000100000000000000000          65536
1111111111111111111111111111111111111101      -3
>
> F%=379
> CALL BINARY,F%
00000000000000000000000000001011110111>

```

Probably the widest selection of software available by mail order.

HERE IS A SELECTION

Send SAE for full list.

Sound pick-off module (simple to fit)	6.95
Amplifier and loudspeaker suitable for above	37.50
Light pen	34.50
X-Y digitiser	80.00

-DISK DRIVES FOR BBC

BBC UPGRADES

The above prices are VAT inclusive. Add £1.00 p&p for orders below £100.00 and £10.00 (Securicor delivery) for orders above £100.00.
Access and Barclaycard accepted on all items except BBC computers.

ACORN USER APRIL



is still in memory the characters EFG.

Machine code routines that make use of the parameter block will probably transfer some or all of its contents to page 0 locations (&70 - &8F are safe to use). This enables indirect indexed addressing to be used for obtaining the current values of any variables required.

In program 1, the statement:

```
CALL BINARY, PARAM%
```

calls the machine code routine *Binary* which prints out in binary the value of the variable passed. It has only one parameter and transfers the pointer to it from the parameter block to locations &80 and &81.

The machine code routine *Square* in Program 2 behaves as an additional graphics command for drawing a square. It expects to receive three parameters that define the square:

```
CALL SQUARE,XCO_ORD%,  
YCO_ORD%,SIDE_LENGTH%
```

The first two parameters are the

- 0080 - low and high bytes of 'active' pointer
- 0081
- 0082 (3)- start of copy of parameter block
- 0083 - pointer to X co-ordinate
- 0084
- 0085 (4)
- 0086 - pointer to Y co-ordinate
- 0087
- 0088 (4)
- 0089 - pointer to length of square
- 008A
- 008B (4)

Figure 3. Locations &80 to &8B as used by 'Square'

horizontal and vertical components of the bottom left-hand corner of the square to be drawn. Subroutines are used by *Square* to check there are three parameters; that each is an integer variable; and that each parameter value is within a particular range. If an error is found control returns to Basic, printing out an error message on the way.

The parameter block is transferred in its entirety to &82 - &8B (figure 3). Locations &80 and &81 are used by several of the subroutines as a pointer to the current variable of interest.

The square is formed by the equivalent of

```
PLOT 4, X, Y  
PLOT 1, 0, L  
PLOT 1, L, 0  
PLOT 1, 0, -L  
PLOT 1, -L, 0
```

These PLOT commands are accomplished by streaming the corresponding VDU command data through the operating system routine OSWRCH. A simple demonstration program runs after the program has been assembled. Alternatively, once assembled, squares can be drawn directly using any call of the form:


```
CALL SQUARE,I%,J%,K%
```

so long as the integer variables accompanying the CALL are assigned.

Program 2, page 38

P.L. DIGITISER SYSTEM™

Designed for use with the BBC Model B Microcomputer



The P.L. Digitiser System enables you to reproduce complex pictures and diagrams, or produce original designs, quickly, easily, and accurately.

The package consists of the 'Graphics Digitiser' incorporating a tracing pad (mapped out by rectangular grid) 256mm x 205mm and the 'Control Program' (cassette tape or disk) which handles the information passed from the digitiser to the microcomputer.

WIDE RANGE OF INSTRUCTION BLOCKS. Instruction blocks enable: boxes and circles of any size to be constructed by specifying two probe positions; filling area with chosen colour; drawing of irregular shapes using chosen resolution; outlining defined area in different colour and varying line thickness; creating lines in Horizontal, Vertical or Angled modes, with parallel lines in repeat or multiple repeat styles again in selected thickness; write and position text.

COMPLETE EDITING FACILITY. Mistakes can immediately be erased and rectified.

RELOCATION AND SCALE. Images may be relocated simply by inputting two probe positions and

scale may be increased or reduced by making just two inputs.


STORAGE. Pictures may be saved on cassette or disc file or reproduced by a line printer.

FULL COLOUR. The range of colour facilities offered by the BBC micro is easily handled by the Digitiser, in modes 4 and 5.

ACCURACY. The probe position is continuously displayed on the screen and fidelity of image to original drawing is very accurate.

NO KNOWLEDGE OF BASIC REQUIRED. Users can very easily and quickly familiarise themselves with the P.L. DIGITISER SYSTEM.

TM-B. S. Dollamore Ltd, Castle Gresley,
Burton-on-Trent, Staffs DE11 9HA.
Telephone: Burton-on-Trent (0283) 217905



photos of screen image



TO: B. S. Dollamore Ltd, Castle Gresley,
Burton-on-Trent, Staffs DE11 9HA

Please supply the following:

Qty	Description P.L. DIGITISER	Cost £109.00	VALUE
	Post & Packing		£4.00
	V.A.T. @ 15%		
	TOTAL		

Each Digitiser is supplied with cassette/disk* Control Program, key card and comprehensive operating instruction manual.

I enclose cheque/P.O. for £..... or please charge on Access/Visa Card

No.

Signature

Name

Address

.....

.....

*Please delete.



```

100 REM SQUARE COMMAND
110 MODE 4:REM DEMO PROGRAM RUNS IN
MODE 4
120 OSWRCH=&FFEE
130 DIM SQUARE 300
140 FOR PASS =0 TO 3 STEP 3
150 PX=SQUARE
160 OPT PASS
170 .SQUARE JSR TRANS ;transfer parameter block
180 JSR TARGS ;test arguments
190 JSR TPARMS ;test individual parameters
200 JSR P4XY ;Plot 4,X,Y

210 LDX #6
220 JSR POINT ;point to L
230 JSR P10L ;sequence Plot 1,0,L and Plot 1,L,0
240 JSR MINUS ;form negative of value pointed to (L)
250 JSR P10L ;sequence Plot 1,0,-L and Plot 1,-L,0
260 JSR MINUS ;restore L to positive
270 RTS ;back to BASIC

280 \
290 \ Subroutine to transfer parameter block to 882 onwards
300 \
310 .TRANS LDX #10 ;length of parameter block
320 .NBYT LDA &0600,X
330 STA &82,X
340 DEX
350 BPL NBYT
360 RTS
370 \ Subroutine to set up 880 &81 to point to Integer variable
380 \ on entry X reg; 0-X 3-Y 6-L
390 \
400 .POINT LDA &83,X
410 STA &80
420 INX
430 LDA &83,X
440 STA &81
450 RTS
460 \
470 \ Subroutine to test each individual parameter value
480 \
490 .TPARMS LDX #0 ;point to X
500 JSR TPRAM
510 LDX #3 ;now Y
520 JSR TPRAM
530 LDX #6 ;and L
540 JSR TPRAM
550 RTS
560 \
570 \ Subroutine to test that there are 3 arguments
580 \ and that each is integer (4)
590 \
600 .TARGS LDA &82
610 CMP #3 ;check no. of arguments
620 BNE ERRR
630 TAX ;set X and Y to 3
640 TAY
650 LDA #4
660 .TTYP CMP &82,X
670 BNE ERRR
680 INX
690 INX
700 INX
710 DEY
720 BNE TTYP
730 RTS
740 \
750 \ Subroutine to test parameter values are in the range
760 \ -32768 to +32767 X reg set for POINT on entry
770 \
780 .TPRAM JSR POINT ;tests that high order bytes
790 LDY #2 ;are both &FF or both &00
800 LDA (&80),Y
810 INY
820 EOR (&80),Y
830 BNE ERRR

840 RTS
850 \
860 \ ERROR routine - returns to BASIC
C
870 \
880 .ERRR PLA
890 PLA ;fetch subroutine return address off stack
900 LDX #0
910 .GCHR LDA MSG,X
920 JSR OSWRCH
930 INX
940 CMP #&0D
950 BNE GCHR
960 RTS
970 \
980 \ Subroutine to negate the low bytes of integer pointed to
990 \
1000 .MINUS LDY #0
1010 LDA (&80),Y
1020 EOR #&FF
1030 CLC
1040 ADC #01
1050 STA (&80),Y
1060 INY
1070 LDA (&80),Y
1080 EOR #&FF
1090 ADC #00 ;add in any carry from lower byte
1100 STA (&80),Y
1110 RTS
1120 \
1130 \ Subroutine to send PLOT 4,X,Y as VDU command
1140 \
1150 .P4XY LDA #&19
1160 JSR OSWRCH
1170 LDA #4
1180 JSR OSWRCH
1190 LDX #0 ;set up pointer to X bytes
1200 JSR POINT
1210 JSR SEND2 ;send 2 bytes to OSWRCH
1220 LDX #3 ;point to Y
1230 JSR POINT
1240 JSR SEND2
1250 RTS
1260 \
1270 \ Subroutine to send low order bytes of integer
1280 \
1290 .SEND2 LDY #0
1300 .NBYT LDA (&80),Y
1310 JSR OSWRCH
1320 INY
1330 CPY #2
1340 BNE NBYT
1350 RTS
1360 \
1370 \ Subroutine to send the sequence
1380 \ PLOT 1,0,L and PLOT 1,L,0 assumes L pointed at
1390 \
1400 .P10L LDA #&19
1410 JSR OSWRCH
1420 LDA #1
1430 JSR OSWRCH
1440 LDA #0
1450 JSR OSWRCH
1460 LDA #0
1470 JSR OSWRCH
1480 JSR SEND2
1490 LDA #&19
1500 JSR OSWRCH
1510 LDA #1
1520 JSR OSWRCH
1530 JSR SEND2
1540 LDA #0
1550 JSR OSWRCH
1560 LDA #0
1570 JSR OSWRCH
1580 RTS
1590 ]
1600 MSG=PX
1610 $MSG="Invalid SQUARE Arguments"
1620 NEXT PASS
1630 REM A SIMPLE DEMONSTRATION
1640 CLG
1650 HX=500:VX=200:LX=900
1660 REPEAT
1670 HX=HX+7:VX=VX+5:LX=LX-20
1680 CALL SQUARE,HX,VX,LX
1690 UNTIL LX=-700
1700 END

```


SIR Computers Ltd CARDIFF

Agents for Acorn, BBC and TORCH Computers

BBC Microcomputers

Model A with 32K RAM and VIA.....	£339.00
Model A with 32K RAM, VIA and Joystick port.....	£354.00
Model B.....	£399.00
Model B with disc interface.....	£509.00

1.2 operating system ROMs available now
Single 100K disc drive..... £249.00
Dual 2x100K disc drive..... £389.00
The disc manual and utilities disc are both included.

Disc interface for the BBC Micro (kit)..... £ 95.00
(fitted)..... £110.00

Upgrade of BBC Model A to B..... £ 90.00

Please telephone for up to date information on Prestel, Teletext, speech synthesis, second processors, etc.

TORCH Computers

Z-80 Disc Pack for the BBC Microcomputer..... £895.00

This unit connects to the BBC Micro in the same way as a normal disc drive, but as well as offering a dual 2x400K disc drive for use under BBC BASIC or other languages it provides the option of using the wide range of CP/M software available for business and data processing applications. The firmware supplied with the machine allows switching between BASIC and CP/M, a powerful operating system developed from CP/M 2.2.

In addition to the disc pack a second processor is supplied. This is a Z-80A with its own 64K RAM card, communicating with the 6502A in the BBC computer through the 'Tube'. Typically the speed of execution of programs under the twin-processor system is increased by up to 50% compared with a conventional single-processor computer.

A third processor, the 16 bit 68000, will shortly be available.

TORCH CF240..... £2795.00
(Ex. VAT)

This an extension of the BBC microcomputer/Torch disc pack system, available in a single unit. The computer contains a BBC-based peripheral processor connected to the main Z-80 computer, a dual 2x400K disc drive as described above, a high resolution (80 character) colour monitor and a complete British Telecom approved 1200 baud modem. It is the only microcomputer which has been granted permission for direct connection to the Public Switched Telephone Network both in the UK and the United States.

The TORCH can communicate either directly with another TORCH or with virtually any other type of computer via Prestel. Using the Gateway facility of Prestel it is possible for the TORCH to access vast amounts of information stored by private organisations on public database systems. The Mailbox facility of Prestel also allows the use of electronic mail.

TORCH CH240/10 As above but with a 10 MB hard disc drive.
TORCH CH240/21 As above but with a 21 MB hard disc drive.

Peripherals

Seikosha GP 100A printer.....	£229.00
Epson MX 80 F/T type 3 printer.....	£389.00
NEC PC 8023 printer.....	£389.00
Microvitec 14" RGB Monitor.....	£299.00
Kaga 12" RGB Monitor.....	£280.00
Sanyo 14" RGB Monitor.....	£260.00
High resolution 12" black/green monitor.....	£ 85.00

Software

We currently hold in stock programs from the following suppliers:

Acornsoft	Level 9 Software
A & F Software	Molemerx
Bug Byte	MP Software
Computer Concepts	Program Power
Digital Fantasia	Salamander Software
Golem	Software for All
IJK Software	Superior Software

Wordwise word processing ROMs now in stock.

Unfortunately we are unable to supply software by mail except as part of a larger order.

Delivery by Interlink of any of the above items..... £ 10.00
Unless otherwise stated all prices include VAT.

SIR Computers Ltd
91 Whitchurch Road
Cardiff
Telephone (0222) 21341



A J SOFTWARE for BBC

'The Record Changer' 32K £19.95 Cass. £24.95 Disc.
for indexing, membership lists, directories, inventories, budgeting, etc., etc.

**don't buy a database in the dark —
check the spec!**

- * **Visible File** — Scroll around the file UP/DOWN/SIDEWAYS by function keys
- * **FULL SCREEN UPDATE** — Use cursor to overtype; character INSERT/DELETE within field; ERASE rest of field; TAB from field to field, etc.
- * **Sort** — on character and numeric fields
- * **Search** — for a match on field content
- * **Select** — select records satisfying conditions on one or more fields; or manually
- * **Total** — total numeric fields of SELECTED records
- * **Arithmetic** — combine one or more fields of your SELECTED records with any arithmetic expression; put the result in any numeric field
- * **Print** — print your SELECTED records with pagination
- * **Up to a 1000** records, (typically 330 at length 40)
- * **Up to 20** fields, number of decimal places can be specified for numeric fields
- * **Utility** — to ADD/CHANGE/DELETE fields

'The Wordsmith' 32K for Centronics 737/739
£19.95 Cass. £24.95 Disc.

For Reports, Essays, Thesis, etc., etc.

Forget control codes — let 'Wordsmith'
realise your printer's potential

- * Full Screen text editor with wordspill
- * Unlimited document size
- * Page numbering, headings, footings, margins, indentation
- * Full Support for **proportional**, mono, condensed, elongated and underlined printing
- * Right justification maintained even when mixing proportional, condensed, elongated on same line

Simple Word Processor 32K
£9.95 Cass. £14.95 Disc.

Simple to use; allows you to set margins, justify text, insert and delete lines of text, set page length or force a page, variable TAB, Multiple copies. Save text on cassette or disc. View text formatted before printing. Works with any printer.

Options Timetable 32K
£14.95 Cass. £19.95 Disc.

A must for every secondary school. This programme helps with the timetabling of pupils 3rd year option choices. Try the effect of any changes to your Options Timetable and let the micro do all the donkey work. Has been in use for the last three years in a 6 form entry comprehensive using a CBM 3032 — now runs even faster on the BBC Model B.

Not only the cheapest, but the best
Switchable 14" RGB Monitor/Colour TV
£250 inc. VAT and cable, £8.00 carr.

Royalties for quality software

All prices VAT inclusive

AJ Vision Service Ltd
61 Jeddo Road
London W12 9ED



CABEL

electronic monitor manufacturer



THE CE370A
NEW R.G.B.
COLOUR MONITOR
£199.50

- * Quality
- * Reliability
- * Manufactured in Britain 100%
- * A moulded case with carrying handle
- * Meets British standard safety regulations (BS415)
- * Automatic black level compensation for tube ageing
- * Mullard AX37-590x Tube
- * Power consumption 60w

CABEL offers you a new high quality 14" inch colour monitor

The case has been designed with safety upmost in our minds.

This advanced model cuts the component count and incorporates the most sophisticated parts on the market today.

Using the MULLARD AX tube, which gives perfect colour registration with reliable and stable operation. Automatic drift (Black level) compensation adjusts automatically with the ageing of the tube.

All this and many other features, including years of experience in the data display industry and backed up by our 2 year guarantee.

We GUARANTEE long service and reliability.

Price £199.50 + VAT Includes R.G.B. Lead

DEALER ENQUIRIES AND EDUCATION ENQUIRIES WELCOME

CHEQUE/POSTAL ORDER, OR FOR FAST DELIVERY, RING US WITH YOUR CREDIT CARD NUMBER

Factory

Unit 15
Whitegate Industrial Estate
Whitegate Road
Wrexham LL11 1AY

Tel 0978 350345

Office

Lloyds Bank Chambers,
The High Street,
Tewkesbury,
Gloucestershire
Tel 021-308 7075
Telex 339671 ALD FAB



CABEL
electronic

Registered No. 1370335



BEEBUG

FOR
THE

BBC MICRO

REGISTERED REFERRAL
CENTRE FOR THE BBC PROJECT

BRITAIN'S LARGEST SINGLE
— MICRO USER GROUP

MEMBERSHIP NOW EXCEEDS 15,000


15,000 members can't be wrong — BEEBUG provides the best support for the BBC Micro. BEEBUG Magazine—NOW 56 PAGES including new Product Guide Supplement—devoted exclusively to the BBC Micro.

Programs—Hints & Tips—Major Articles—News—Reviews—Commentary.

PLUS members discount scheme with National Retailers. PLUS members Software Library.



10 Magazines a year. First issue April 1982. Reprints of all issues available to members.

SCREEN SHOTS FROM PROGRAMS IN BEEBUG MAGAZINE




**BEEBMAZE
FEBRUARY
1983**

**WINDY FIELDS
FEBRUARY
1983**



**RACER
NOVEMBER
1982**

**ENVELOPE
EDITOR
NOVEMBER 1982**



**SPACE
CITY
DECEMBER
1982**

May Issue: Careers, Bomber, Chords, Spiral and more. Plus articles on Graphics, Writing Games Programs, and Using the Assembler.

June Issue: Mazetrap, Mini Text Editor, Polygon; plus articles on upgrading, The User Port, TV set and Monitor review, Graphics part II, More Assembler Hints, Structuring in BBC Basic, plus BBC Bugs.

July Issue BEEB INVADERS and other programs—plus articles on using the Teletext mode, BBC cassette bugs fix, Software Review, using user defined keys. More on structuring in Basic. Using the User Port, and many hints and tips.

September Issue: High/Low Card Game, and Hangman Programs. Articles on Logic on the Beeb, Debugging, Moving multicoloured characters, creating new colours, Operating system 1.1. Plus Postbag, Hints and Tips, and Procedure Library.

October Issue: Program Features: Alien Attack; Calendar Generator; Union Jack; Memory Display utility. Plus articles on Beebugging; Improving Key Detection; Acorn Press Release on O.S.H.2; and Issue II Basic; The Tube and Second Processor Options; or New Series for less experienced users; and Software Reviews.

November Issue: Program Features: Racer (excellent 16K racing car game), Mini Text Editor (Mk2), Transparent Loader, Music with Memory, Harmonograph Emulator, New Character set for Modes 2 & 5; and cassette block-zero—bug retrieve. Plus articles on sound and envelope design—includes indispensable envelope editor program; Debugging Part 3, BBC Basics—Memory Maps and addressing explained; Serial Printer Port (RS423) and RGB upgrade. Plus a large number of Hints & Tips, and a guide to our past issues and their contents.

Dec/Jan Issue: Program Features: Space City (invader-type game), Breakout, Artist (Joystick painting program); Rescue (miraculously retrieves programs after bad loading or 'Bad Program' message); and Pack—a program to compact Basic programs. PLUS Disc System Review, Software reviews—including Wordwise, Book reviews, Adding Joystick interface to model A; How to access the video controller chip; and ideas for the newcomer; plus a new crop of Hints and Tips.

February Issue: Program Features: BEEBMAZE—Find your way through the random maze, guided by 3D views from inside the maze—an excellent game. FIVE-DICE—A Beeb implementation of YAHTZEE(R), a novel dice game. Also a listing of WINDY FIELD—a creation from Acornsoft, SPIROPLLOT screen doodler, and a complete memory display program in a user key. Plus Machine Code Screen Dumps for the Epson and Seikosha Printers; articles on USING FILES, IDEAS ON ANIMATION (including a Rotating Cube program), an Introduction to the Use of Procedures, a Survey of Books on the BBC Micro, and a Roundup of Disc System Hints. PLUS a variety of HINTS, TIPS AND INFO, including a single VDU command to perform a SIDEWAYS SCROLL. WIN A COLOUR MONITOR, WORDWISE WORD PROCESSORS AND ACORN SOFTWARE BOOKS IN OUR THIRD SOFTWARE COMPETITION.

STOP PRESS

BEEBUG has negotiated a deal with ACORN over the new 1.2 OPERATING SYSTEM ROM. BEEBUG members are offered the ROM at around half-price. See BEEBUG Feb issue for details.

BEEBUGSOFT: BEEBUG SOFTWARE LIBRARY

offers members a growing range of software from

£3.50 per cassette.

1. Starfire (32K). 2. Moonlander (16K). 3D Noughts and Crosses (32K). 3. Shape Match (16K). Mindbender (16K). 4. Magic Eel (32K). 5. Cylon Attack (32K). 6. Astro-Tracker (32K).

Utilities: 1. Disassembler (16K). Redefine (16K). Mini Text Ed (32K).

Applications: 1. Superplot (32K).
2. Masterfile (32K).

**13% DISCOUNT TO MEMBERS
ON THE EXCELLENT WORDWISE
WORD PROCESSING PACKAGE—
THIS REPRESENTS A SAVING OF
OVER £5.00.**

Send £1.00 & SAE for Sample

Membership: UK 5.40 for six months, 9.90 for one year.

Overseas one year only: Europe £16.00, Middle East £19.00, Americas & Africa £21.00, Other Countries £23.00

Make cheque to BEEBUG and send to: BEEBUG Dept 13, 374 Wandsworth Rd, London SW8 4TE

Send editorial material to: The Editor, BEEBUG, PO BOX 50, St. Albans, Herts AL1 2AR



IAN BIRNBAUM sets out to improve your programming techniques on the BBC micro.

He will answer reader's questions in this column and develop their ideas – as well as giving some of his own. But the real aim is for readers to provide the questions and the answers.

At least £5 will be paid for any tip published, with £10 for those which merit a one-star award and £20 for real humdingers!

The idea must be original and be described clearly and fully. It should not have been published before.

Your contribution should be typed or printed, with any substantial listings on cassette, but only included to make a point.

Send your hints or questions to BBC Forum, Acorn User, 53 Bedford Square, London WC1B 3DZ. Please include a self-addressed envelope if your contribution is to be returned. We cannot answer letters individually, but a cross-section of common and interesting points will be covered.

TAPE TO DISC TRANSFER – T

To transfer programs from tape to disc is easy:

```
*TAPE, LOAD""; *DISC, SAVE"PROG"
```

However, with a lot of programs on one tape, this can be speeded up. Program 1 will load an entire tape onto disc automatically. Once set up, it can be left to make the transfer itself. What's more, it is not even necessary to type in the names of the programs to be transferred.

Type in program 1, and press the red function key f0. Set up the tape recorder, load the tape, rewind it and press play on the tape recorder. Finally, put the desired disc into the drive. That's all there is to it!

Here's how the program works. *FX 138,0,128 puts the ASCII code 128 into the keyboard buffer. This is the code generated by f0. Once

```
10PROCTEST:END
20DEF PROCTEST
30PRINT~256*?5+?4
40CLEAR
50PRINT~256*?5+?4
60ENDPROC
```

Program 2a.

```
10GOSUB20:END
20PRINT~?&25
30CLEAR
40PRINT~?&25
50RETURN
```

Program 2b.

this key is pressed, it will continue to call itself until Escape is pressed. After loading the program from tape the rest of the code reads the name (or the first seven letters of the name) and saves the program with that name (stored in A\$) on disc.

```
*KEYO *TAPE!M*FX138,0,128!MCLS!MLD.""!M
A$="":I%=HIM.+200:J%=0:REP.A$=A$+CHR$(J
%?I%):J%=J%+1:U.I%?J%=32 OR J%=7!M*D.IM
SAVE A$!M
```

Program 1.

AUTO-DESTRUCT EARNS IAN COPESTAKE £20

Programs written for other people to use must be able to handle the deviant behaviour pattern known as 'pressing Escape by mistake'.

In operating system 1.0, *FX229,1 should take care of the problem. Those of us with 0.1 systems could try using:

```
ON ERROR GOTO ERL
```

but this will not always jump back to the right part of a multi-statement line, and it falls down completely if Escape is pressed during a loop or a procedure (*User Guide* pp 149, 309).

The following program line provides a solution. Insert it near the beginning of your program, after you have

finished de-bugging.

```
20 DIMP%1: ?514=P%: ?515
=P% DIV 256: [OPTO: RTS:]
*K.10 1: IM
```

To test this out, add the following lines and run:

```
30 REPEAT PROC%
40 UNTIL FALSE
50 END
60 DEFPROCx: FOR A=0 TO
9: PRINT A: FOR B=1 TO
1000: NEXT,: ENDPROC
```

Escape never causes the program to lose its place, and you will have to press Break to get out of it. The *KEY10 definition means that after Break, the program has apparently disappeared. It cannot be listed, and OLD will

not help.

However, most of it is still in memory, and a recovery routine (such as that published in December's *Acorn User*) would bring it back from the dead. To prevent this, delete *K.10 1: IM and enter a separate line:

```
10 *K.10 Z%=&E00: REP.
!Z%=0: Z%=Z%+4: U.FA.IM
```

When this is RUN, pressing Break will cause the program to self-destruct. A program protected in this way is almost impossible to list, once it has been run.

In passing, note the comma in 'NEXT'. It is short for 'NEXT B,A' – a syntax not mentioned in the *User Guide*. The B loop is just to slow things down.



THE EASY WAY

```
10REPEAT
20PRINT"&24
30CLEAR
40PRINT"&24
50UNTILFALSE
Program 2c.
```

```
10FORI%=1 TO 10
20PRINT"&26/15
30CLEAR
40PRINT"&26/15
50 NEXTI%
Program 2d.
```

If a load error occurs from tape, no further programs will be loaded, since a search will be made for the rest of the program. This can be averted using *OPT2,0 before starting, but there is then a danger of saving a faulty program. In general, however, the 'bad program' message will occur and this program will not be saved (this does not stop the rest of the programs being loaded, and saved, however).

Although this process is used to maximum effect when transferring programs from a single tape, it can also be used to load from several tapes. In this case, you will have to change the tapes manually, but the rest is still automatic.

As a final point, don't forget files can be renamed after being saved on disc using *RENAME.

UNEXPECTED RESULT

Type X=3:PRINT -X 2 into your computer, but before you do write down the answer you expect. Now see what the computer gives. This discrepancy is not in accordance with the dictates of algebraic logic: -3^2 should be -9 ; it is $(-3)^2$ which is 9.

The reason is that the unary operator 'minus' takes precedence over all binary operators, including exponentiation. This in turn owes its existence to the way negative numbers are stored and manipulated at machine code level. The consequences are worth bearing in mind, especially when EVAL is applied to input from users.

CLARIFYING CLEAR

AND ONE PROBLEM


OVER TO YOU

Two interesting letters this month. Timothy Matsell of Lincoln writes: 'While writing a program for the BBC micro it was necessary for a procedure to contain the command CLEAR. When the program was executed the procedure was called and executed perfectly, but stuck at the line containing the Basic instruction ENDPROC. I have also found that CLEARing within a subroutine produces the message 'No gosub' on exit. I presume the return address has been cleared from the stack. Am I correct, and should it happen? I have the 0.1 operating system and wonder if the 1.2 system will perform similarly.'


The first thing to say is that this effect must be independent of the operating system in use. CLEAR is a Basic statement and so the way it is interpreted depends upon how the Basic language ROM interprets it, and not on the OS ROM in use.

What happens when CLEAR is executed is that all the following pointers are re-initialised: top of variables (stored in 2,3); bottom of Basic stack (stored in 4,5); number of nested REPEATs (stored in &24); number of nested GOSUBs (stored in &25); and number of nested FOR/NEXT loops (stored in &26). Programs 2a to 2d make this clear. This is obviously a deliberate implementation on Acorn's part, though not a particularly helpful one. It would be enough to reset the top of variables, I would have thought.


Paul Hopkins of Hove wanted to know the best way to tell a program when each vertical synchronisation signal is sent to the television. As he says, this would be useful for machine code graphics programs where animation is involved. The best answer we receive to this from readers will be published here in Beeb Forum, so let's hear from you.

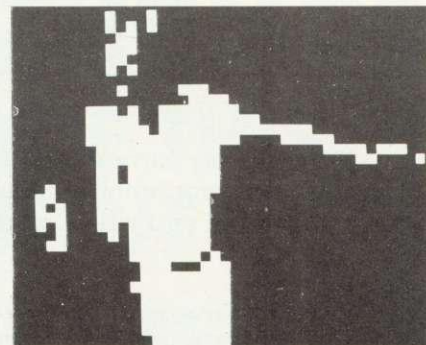

1280 bits

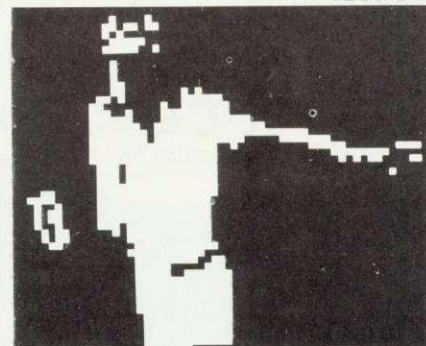

2700 bits

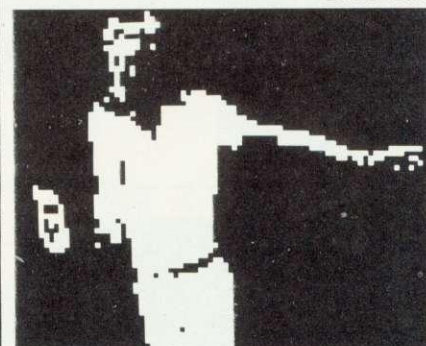

5120 bits



9100 bits



20,480 bits

Have you guessed yet? Turn to page 53 for the answer.

BIG IN LITTLE COMPUTERS

We probably carry the best stock of games and programming software for the BBC that you'll find anywhere

including the full range of Acornsoft, BBCsoft and many independent companies

THE VIDEO PALACE

62 Kensington High St. London W8.

**THE VIDEO PALACE SOFTWARE
MAIL ORDER CATALOGUE**
Send 25p p.o. + large s.a.e.

BugByte Cassettes

& the BBC micro -made for each other



£7.50



£7.50



£9.50



£7.50

The BBC Microcomputer is made to excel, made to do a lot more than market forces demand, and certainly more than other manufacturers seem to appreciate.


With that same progressive attitude, Bug-Byte have produced four superlative new programs, all of which are designed to use the facilities of the BBC Micro as no others can.

Galaxy Wars, City Defence, Space Invaders and Music Synthesizer are exciting, innovative, absorbing and educational. They run on BBC Model B or Expanded Model A, and will work with all current BBC ROMs.


See the full range of Bug-Byte cassettes at larger branches of Boots, W.H. Smith, Micro-C, Spectrum, Laskys or your nearest Computer Dealer.

BUG-BYTE SOFTWARE

100 The Albany, Old Hall Street, Liverpool L3 3AB

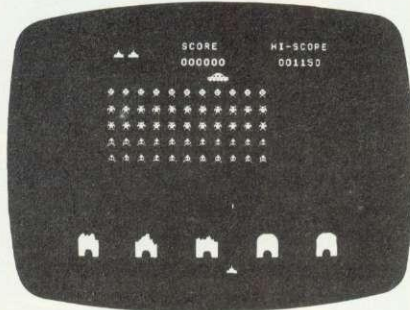

001 INVADERS - High quality full feature arcade style Space Invader game, written in machine code, using Model colour graphics, sound envelopes, Hi score, mystery ship, bonus base, advancing/walking aliens.

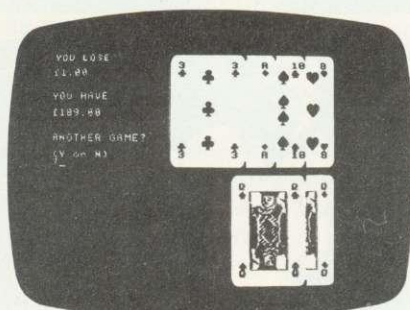

004 BLACKJACK - Just like the arcade game. DISASSEMBLER - Restores assembler code. TEXTPRO - Text processor offering text scrolling, editing, justification, tape routines, printer commands, etc.



4 BRILLIANT NEW SOFTWARE TAPES for the BBC Micro (32K) - If you're looking for COMPUTER SHOWPIECES - Look no further!

- ORDERS SENT BY RETURN POST
- REAL TIME GAMES HAVE JOYSTICK OPTION
- EACH TAPE COSTS JUST £6-95 inclusive

Software Invasion, 50 Elberough St., Southfields, LONDON SW18 5DN.

Please send the following programs at £6-95 each inc.

- () 001 Invaders.....£
- () 002 Galaxian.....
- () 003 Apollo.....
- () 004 Blackjack, Textpro, Disassembler.....

I enclose cheque/P.O. for £

NAME.....


ADDRESS.....

.....

.....Post code.....



003 APOLLO - Lunar Lander with a difference! 4 stage game comprising Orbit, Long range, Mid range, detailed landing. Limited fuel, Hall of fame, sound, moon walk etc.

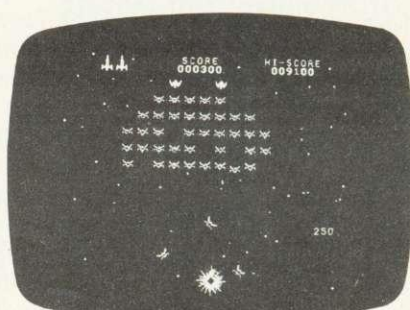


002 GALAXIAN - Another top quality full feature arcade style game using machine code, vivid Model colour, moving stars, Hi score, bonus ship, flagships, up to 5 swooping aliens. Exciting but tasteful sound effects.



Figure 1. This pattern is made up of triangles and rotated. Pupils must first define a triangle and a diamond. The pattern then can be drawn with a simple program viz:





REPEAT 4
TRIANGLE
LEFT 45
DIAMOND
LEFT 45
AGAIN



Such analytical strategy is not only a sound approach to programming a computer, but also a problem solving skill of much more general applicability.

PROGRAMMING— HOW TO FACE THIS DIFFICULT ISSUE

Heather Govier discusses
how primary children should learn
to program and whether the
right tools are available

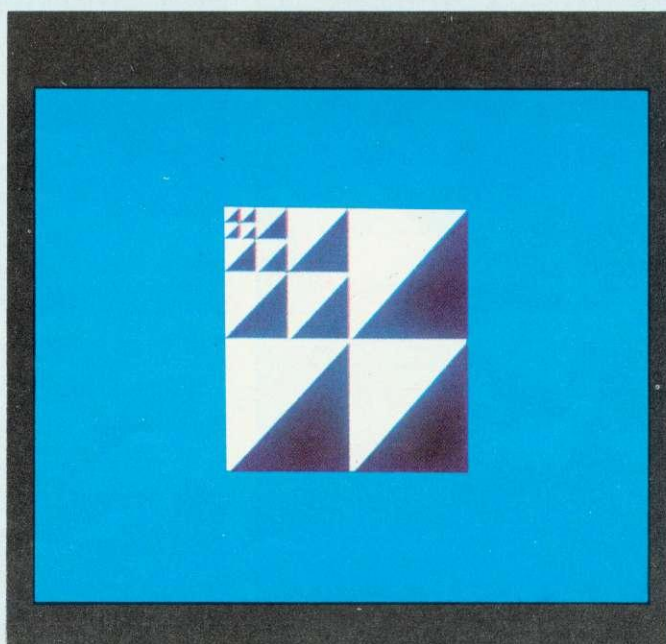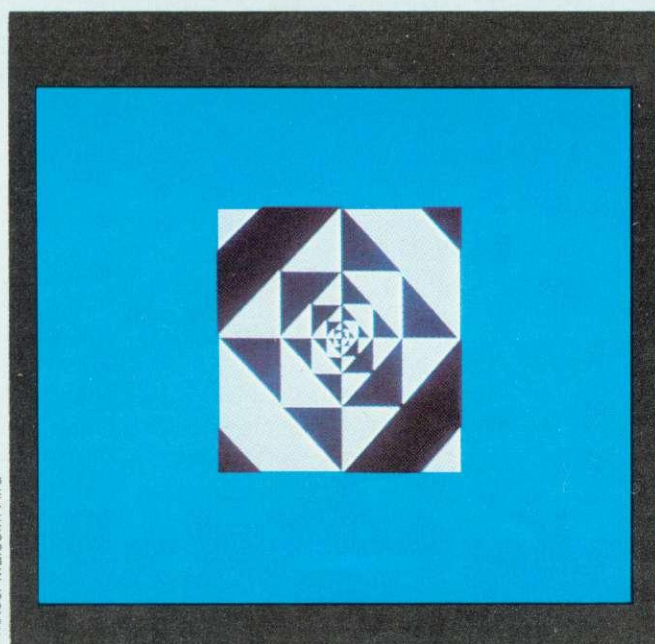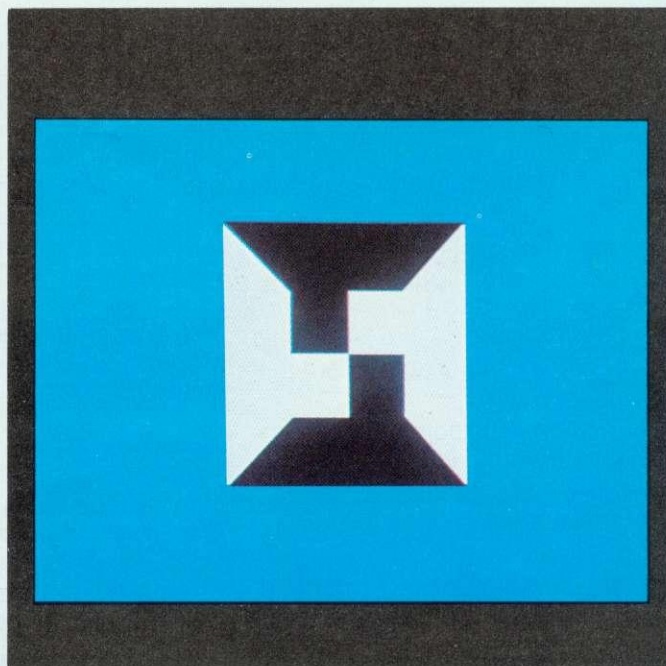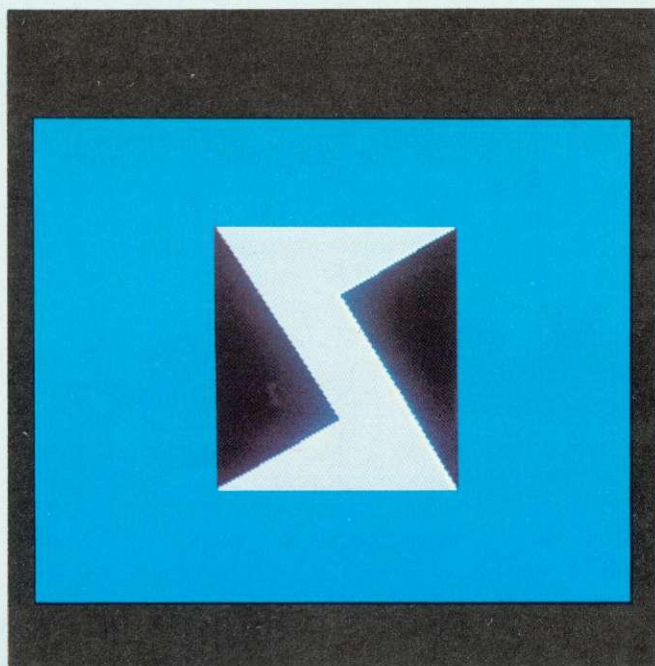

Photos: Malcolm Aird

Heather Govier is microelectronics advisor for the London borough of Croydon. Series consultant is Paul McGee.



A computer program is a sequence of instructions which gives anyone who has a computer control over it. The question faced by primary schools is whether pupils should be given this control through: already-written software; programming languages designed for primary pupils; a general purpose programming language like Basic.

At present, much work in schools is based solely on pupils' enthusiasm for computers, without any underlying philosophy or planned progression, but it is important that the teaching of programming should not be approached in such an uncoordinated manner.

Pupils will need to learn to use computers, but not all will need to program them. Among the reasons for pupils learning to program are:

- to produce programs which perform some useful task that would be unduly tedious otherwise;
- to help pupils appreciate the power and limitations of the computer;
- to provide new tools for thinking;
- to aid the teaching of work related to computers and information technology.

It is not clear that these objectives will be met by teaching the type of Basic available on most micros,

```

100 REM ADDRESS
110 REM TO PRINT MY ADDRESS.
120 CLS
130 PRINT TAB(6,8)"JASON GUZIKOWSKI"
140 PRINT TAB(7,10)"125, MEADOW VALE"
150 PRINT TAB(8,12)"COULSDON"
160 PRINT TAB(9,14)"SURREY CR3 5JR"
170 END
    
```

J A S O N G U Z I K O W S K I

1 2 5 , M E A D O W V A L E

C O U L S D O N

S U R R E Y C R 3 5 J R

although BBC Basic is better than most. Primary pupils and many secondary pupils, will probably gain more from using a language such as Logo which concentrates on the problem-solving aspect at the expense of detailed syntax. However, structured languages, including structured Basic, will probably be used in secondary schools.




Teachers in primary schools will face difficulties as parents suggest there ought to be more programming teaching, particularly if this skill is possessed by some parents and pupils who have computers at

home. Many primary pupils are keen and ready to learn programming and certain pupils manage extraordinarily well. However, the development of skills of a small minority can have adverse effects on other pupils. The school's problem is deciding what resources to commit to this activity when it is robbing other pupils of the teacher's time and energy.

Many primary teachers will not feel confident or competent to teach programming, which could have an adverse effect on pupils. So organising a computer club may make it possible for pupils who wish to learn to program to do so without effecting others.



Children using Logo - from simple beginnings

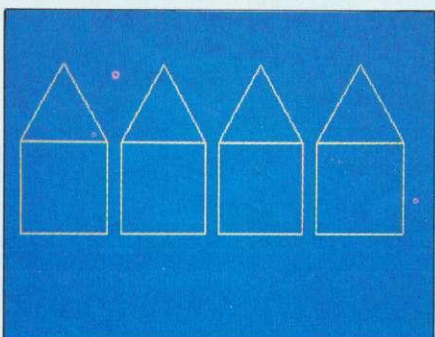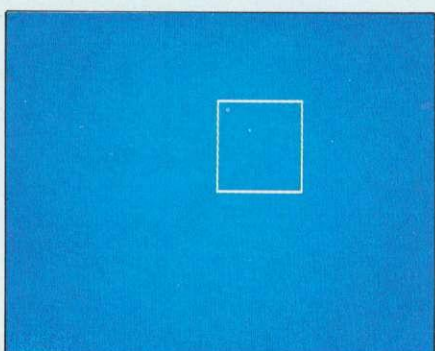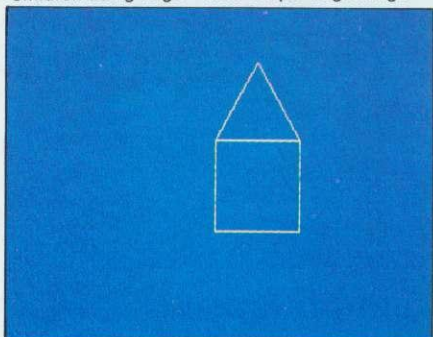

Secondary schools use computers to teach computer studies, usually from the fourth year upwards and it is unlikely that most will have sufficient computers to teach computing to all pupils in the first three years. Bearing this in mind, it could be difficult if pupils arrive from primary school with programming skills to find no outlet for them in secondary schools. It might be more valuable for the primary school to develop some more generally worthwhile educational activities and leave the teaching of programming languages to secondary schools. There is also a danger of a recurrence of the problems with mathematics - pupils being wrongly taught concepts, particularly set theory, and then having to be untaught it in secondary school before they can start on the correct



notation and methodology.

The arguments about Basic are complicated because it means different things to different people. Early versions of the language are extremely unsophisticated, and the user sometimes has to fiddle about with machine code via peeks and pokes. Primary school pupils should certainly not have to learn to program at this level. Some computers, such as the BBC micro have a very sophisticated Basic which although not fully structured, does offer pupils the chance to write ordered programs.

The great advantage of Basic is its availability. It seems likely that many pupils will have access to, or own, a computer at home. They will therefore expect to learn the languages available on these machines, and to many parents it may seem strange if school prepares them for something else.

Also, there are different levels at which programming can be understood by such pupils. They may simply wish to be able to read, understand and where necessary make minor alterations to programs, or at the other extreme the pupil may expect to be able to design a program starting from outline specification. Even at the level of reading a program it becomes particularly difficult to cope with all the dialects of Basic. Although many keywords are the same in most variations, interesting features such as graphics are often performed by functions specific to the machine. The BBC computer is particularly bad in this respect because it has a string of VDU commands that are totally incomprehensible in other Basics.

Another great advantage of Basic, and its disadvantage in the long term, is that it is apparently easy to start programming. Years of experience have shown that almost anyone can start to write programs after a very short time, but this leads to great difficulties as initial success is frequently bought at the price of sloppy thinking and bad habits. An analogy is the art of essay writing where it is easy to write thoughts in a fairly random sequence when the piece of work is small, but much more detailed planning is needed when a longer

piece of work is required. Teaching correct forms of programming can often be slow and tedious, and in primary schools there are not many people whose interest would be in such formal programming rather than in using the computer in a straightforward way.

The second difficulty to be faced by primary teachers is the absence of books on programming at the right level. The problem of dialects has been mentioned and books tend to be written for particular machines. Many authors hope to produce different versions of their book for different micros and tend to write in a limited subset of all the dialects, often concentrating on the least interesting features of each. Most books are not produced specifically for schools, but are written for enthusiastic amateurs who can be assumed to have high standards of literacy and certainly be highly motivated. This will lead to difficulties when the activity has to be organised in groups. As there is no agreed method of teaching

programming, it is unlikely that anyone in the near future will develop teaching materials specifically related to primary schools which will be consistent with secondary schools.

There is much discussion in the academic world about the wisdom and desirability of using flowcharts, decision tables or structure diagrams as aids to programming. Many of the ideas encompassed in structured programming seem sophisticated and would appear complex to a primary teacher.

Most computers come with a Basic interpreter in ROM so it is not possible to use a compiler. The immediate feedback from an interpreter can be helpful to the novice although many computers give extremely unhelpful diagnostic error messages. Several systems either give an error number which forces the pupil to refer to an incomprehensible manual, or merely give a response such as 'Syntax error'. The effect of this is not hard to imagine and the early teaching

```
>
100 REM TABLES
110 REM TO CALCULATE TABLES.
120 CLS
130 PRINT
140 INPUT "WHICH TABLE (1-12) ", T
150 PRINT
160 FOR N=1 TO 12
170 PRINT N*T
180 NEXT N
190 END
```

W H I C H T A B L E
(1 - 1 2) ? 6


6
1 2
1 8
2 4
3 0
3 6
4 2
4 8
5 4
6 0
6 6
7 2



```

100 REM DRAWING
110 REM TO DRAW A DOG.
120 MODE 1
130 MOVE 300,200
140 DRAW 400,200
150 DRAW 400,350
160 DRAW 700,350
170 DRAW 700,200
180 DRAW 800,200
190 DRAW 800,500
200 DRAW 950,500
210 DRAW 950,650
220 DRAW 700,650
230 DRAW 700,500
240 DRAW 350,500
250 DRAW 350,600
260 DRAW 300,600
270 DRAW 300,200
280 END

```

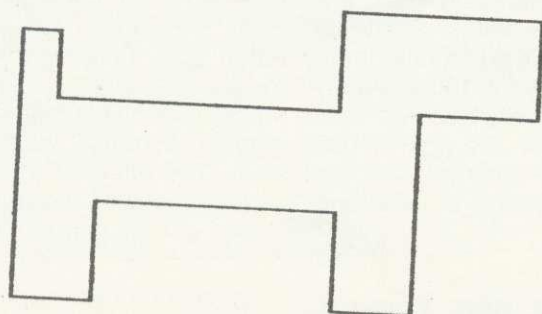

of programming with such unsatisfactory software aids may be harmful for the pupils. Although a compiler may be more difficult to use, it does impose more discipline on the user and prevents fundamentally wrong programs from starting. Even more satisfactory is the use of software, which gives easily understood messages when syntax errors are made.

The turtle-graphics of Logo provide a better medium than Basic for teaching young children about programming. There are a number of reasons why this is true, the most important of which is immediate feedback. When a simple program or procedure is typed into the computer there is often an immediate graphical response to each line of the procedure. Thus pupils can immediately spot errors. Debugging is straightforward and the thinking processes involved are kept as simple as possible.

This is in stark contrast to a Basic program which must be typed in full before being run. Any logical error is likely to mean the program simply will not run. Under such circumstances there will be few clues as to where the problem lies, or what its nature is.

The immediate response of Logo is an aid to debugging and a great motivator. Children can make the computer respond by typing in just a single instruction and the graphical result is particularly dramatic. There is also no need for pupils to learn a new language to program in Logo. The commands are everyday words with their everyday meanings, even five year olds can use the words. In the better versions of Logo there is no complex syntax to learn and typing mistakes produce sensible error messages. For example if a pupil types the command *Foorward* 60, the response will come:

'I do not know how to
FOORWARD'

Again the mistake is easily found.

Not only is it easy to start with Logo, it is also easy to progress towards more sophisticated programs. Use of repeat loops, procedures and variables can be introduced in a systematic way, preferably in response to the needs of the pupils. Thus comments that it is tedious to type the same instructions over and over again (when drawing a square for example) could lead to the introduction of REPEAT. Similarly a desire to 'make the house smaller' to draw a street is an ideal stimulus for the pupils to learn about editing and variables.

Because it is based on procedures, Logo has good structure and its use can develop sound programming habits. Pupils can be taught, in the early stages, the need to break down a problem into its constituent parts and to tackle these elements one at a time (figure 1).

The pictorial nature of turtle graphics means good habits of planning can be developed. In the early stages, pictures and patterns can be drawn on squared paper and the procedures to produce them worked out before coming to the keyboard. Later, the drawing stage may be omitted, but habits of thinking through the problem and analysing the constituent parts while away from the computer can still be encouraged. This may be an essential approach if congestion at the keyboard is to be avoided.

As many pupils are unlikely to continue programming in later life, it is important that the teaching of programming develops skills in other subjects. It is easy to see how Logo can benefit maths, for example, because in the planning stage pupils will need to use protractors, rulers and compasses and thus be motivated to learn to use them effectively.

Use of Logo is one of the best ways to acquire the concept of an angle as a unit of turn. Children commonly confuse the angle with the length of its bounding lines but this can never arise with Logo. Other mathematical concepts such as variables are also given new

clarity. Lest it be thought that only mathematical spin-offs are possible, the value of the language as a stimulus for discussion and debate must be mentioned. When working in a group to debug a program there is an obvious need for care in thinking and speaking.

While there are no good texts for teaching Basic to young pupils, there are a number which suggest ways of using Logo. Papert's book *Mindstorms* is one, and good versions of Logo are accompanied by teachers' notes and a book aimed at primary pupils.

Another language which could be used to teach programming to juniors is Prolog. Although, like the full Logo, Prolog is a sophisticated language, one aspect – its use with databases – is most commonly cited in introductory texts.

There are few command words to learn, but current versions of Prolog have a more complex syntax than Logo and give less helpful error messages. As with Basic there is no immediate response to each line of input which means the language is less motivating and searching for bugs is likely to be more difficult.

However, Prolog (which stands for PROgramming with LOGic) could be used to develop logical thinking and enable older pupils to write useful programs. For example, by building up a database on 'what eats what' food webs can be created and deductions made which may not seem obvious.

Again as with Basic there is a lack of good teaching materials appropriate to pupils under the age of 11 but Prolog is still a young language itself. Versions which respond to 'ordinary English' and which are less sensitive to syntax errors could be useful for teaching problem solving and reasoning skills.

In the long term there must be serious questions raised about whether programming will be significant in the adult world. In industry and commerce, almost everyone uses professionally produced software and it is likely this trend will spread. Also under development are program generators which write programs without the

user having to know the detailed structure of the programming language. A typical invention in this respect is a program called *The Last One* which will write Basic programs quickly and efficiently for anyone who is able to specify the problem in sufficient detail. It could be argued there is no more need for a person to know how to write a program than there is for such a person to be able to mend a television or service a car.


Programming is like mathematics in that it is easy for pupils to meet problems which they cannot resolve and become disheartened. A good teacher will take great care pupils attempt problems within their capabilities, which implies some knowledge of the difficulties of programming. This can only be acquired by writing programs

which is a time consuming activity.

Many people start programming using low resolution graphics or producing simple messages on the printer. In both cases the use of squared paper as a design aid can save frustration and time. For any worthwhile programming work the school needs a printer since it is difficult for young children to think when reading a program on a screen. They will nearly always need to sit down with a listing and think about it. A printer will be useful in other activities, but it is essential if pupils are to learn to program effectively.


Another important aspect of designing a program is the need for carefully thought out test data before coding begins. One view is that the best programs are written from the output and the test data, and only at the end are input and the procedures determined.

```
>LIST
100 REM TEXT AND GRAPHICS
110 MODE 5
120 MOVE 500,900
130 DRAW 200,900
140 DRAW 200,300
150 DRAW 500,300
160 MOVE 200,600
170 DRAW 350,600
180 MOVE 800,300
190 DRAW 800,900
200 DRAW 600,900
210 DRAW 1000,900
220 PRINT TAB(4,26)"PHONE HOME"
230 END
```

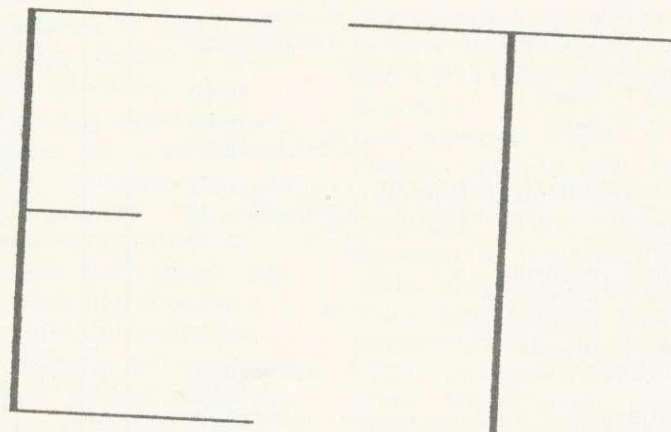

PHONE HOME

BBC computer software BBC SECTA INVADERS

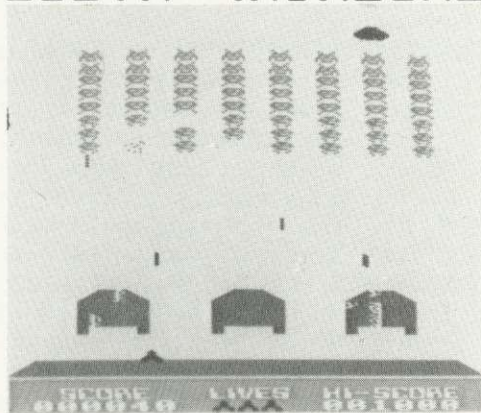

ACTUAL SCREEN PHOTO


FEATURES

14K MACHINE CODE FOR MODEL B OR 32K MODEL A
JOYSTICKS OR KEYBOARD. FULL COLOUR
FAST/SLOW BOMBS. NEW HIGH SCORE TUNE
SOUND ON/OFF. TOP TEN SCORES WITH NAMES
SAVE YOUR TOP TEN SCORES ON CASSETTE
LOAD YOUR OLD TOP TEN SCORES FROM CASSETTE
FIVE SKILL LEVELS WITH COLOUR CHANGES
UNIQUE EXPLOSION GRAPHICS. ETC.

ONLY £5.95 inc.

SECTA SOFTWARE
187-195 BROAD STREET
COVENTRY CV6-5BN : TEL (0203) 662078

A NEAT ANSWER TO A COMPUTER PROBLEM

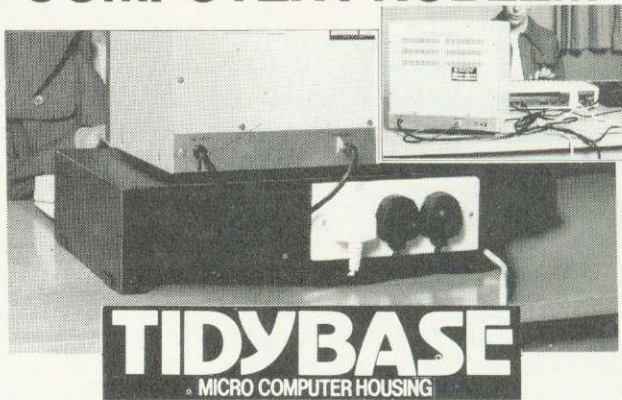

TIDYBASE MICRO COMPUTER HOUSING

Specially designed for use with the BBC Micro Computer, but suitable also for use with other models, the TIDYBASE will support your colour or b/w display unit and house your micro processor. It not only keeps everything neat and tidy, it brings added safety features, particularly important where children may be operating equipment.
A.B.S. Approved 13 amp 3-way socket, fused and covered, is built into the back of the unit and provides 1 metre of cable terminating in a 13 amp plug. Into the socket can be plugged the VDU, the micro processor and the externally located cassette recorder or disc drive unit. This important safety feature means no

expensive adaptors needed and no potentially dangerous 'multi plugging' into one mains socket.

The special 'Bridge Unit' constructed of sheet metal, painted and stoved in Chocolate Brown, supports the VDU at a convenient viewing height with the micro processor housed beneath.

	Length	Width	Height
Overall	444mm	305mm	114mm
Opening	419mm		101mm

PRICE PER UNIT **£25.90**

(Send cheque for £32.29 which includes £3.89 VAT and £2.50 P&P.)

Please send me (No. of units) I enclose cheque for £..... made payable to Remedian Instruments Ltd.

Name.....

Position.....

Address.....



REMEDIAN INSTRUMENTS LIMITED, 3 Over Links Drive, Poole, Dorset
BH14 9QU.
Telephone: Canford Cliffs (0202) 708404

VAT No. 373 660 735

BBC SCHOOLSOFT BBC Quality educational software for BBC (32K)

WRITING demonstrates to young children how to form lower case letters. Choice of three sequences of letters. Full screen size. Suitable for both individual and class work (5 - 7 years) **£5.50**

BRITISH GEOGRAPHY - two programs to teach locations of British cities and ports. Guide the cursor over the map until the location is found. A second phase re-inforces the teaching stage (juniors).

Program 1 - Cities **£5.50**

Program 2 - Ports **£5.50**

(or both for **£8.00**)

INTRODUCTION TO ARITHMETIC - a HELP stage and moving graphics demonstration of correct answer in all programs.

Program 1 - Addition

Program 2 - Subtraction

Program 3 - Multiplication

Program 4 - Division

(5 - 7 years) each **£10.00**

CAROUSEL - Sequences of colours and sounds **£5.00**

All programs make use of colour and moving graphics
Special terms for Local Education Authorities.

Add 50p p/p per order

Schoolsoft 19 Shadwell Grove, Radcliffe-on-Trent,
Nottingham NG12 2ET

Bourne Educational Software BES makes learning fun BBC

WORDHANG (Code P20)

Superb version of 'Hangman' word guessing game where you have to guess the letters of a word with a limited allowance of mistakes.

- Watch your children improve their spelling and word knowledge by trying to stay alive! It keeps check on their scores too!
- Utilises full colour high resolution graphics facility of BBC micro - watch his face as the final mistake is made!
- Incorporates internal list of words divided into groups to suit age range of 5 to 13 years (no responsibility accepted for disconsolate children when Mum and Dad get addicted too!).
- Features facility to guess full word at any time - but beware of the penalties for getting it wrong!
- Includes easily loaded lists totalling 260 words - and your own lists easily saved too! Suitable for Model B.

ANIMAL/VEGETABLE/MINERAL (Code P21)

Think of an object and see if the computer can guess it correctly!

- Program asks you to think of an object and then asks a series of questions as it tries to guess the answer. Ultimately the program either guesses the object correctly or asks for a question to distinguish the item from the computer's incorrect guess!
- Stimulates fascinating (and educational) discussions as to the difference between an alligator and a crocodile, steel and iron, etc, and encourages use of reference books.
- Programmed questions and objects entered can be saved at any point, so extending interest. Suitable for Model A and B.

BES POLICY is to despatch within 24 hours of receipt of order

TO: BES, Dept AU2, Bedford Lane, Headbourne Worthy,
Winchester, Hants SO23 7SQ. Tel: 0962 882474

Qty	Code	Cassette	Price	Total
	P20	Wordhang	£7.95	
	P21	Animal/Vegetable/Mineral	£4.95	
	P20 + P21	Wordhang + Animal/Vegetable/Mineral	£10.95	

I enclose cheque/P.O. payable to BES

value: £

Name.....

Address.....



TWO APPROACHES IN THE CLASSROOM

PRIMARY school software must meet two requirements: it must appeal to children, and have some educational merit. Two programs I use, *Animal* and *Explore*, are successful in both respects.

The first is a program which requires children to think up questions to differentiate between various animals of their choice. These questions are typed at the keyboard and stored in the computer so it 'remembers' the names of the animals and their distinguishing characteristics. These questions then reappear as prompts during the next cycle of the program.

The program can be used by a whole class but the fewer the children the more opportunities for discussion about questions to be input. This discussion may lead the children to consult reference books about unfamiliar animals they have chosen. In this respect the program can be used with pupils of various ages. Young children might simply like to think about the differences between pets, for example, while older juniors might develop a more rigorous classification of animals (eg whether they are mammals, invertebrates, herbivores).

One further point is that *Animal* is a program where the children teach the micro and not the other way around – they are masters of the machine. This is an important attitude to convey as many adults blame computers for mistakes: they forget computers only follow instructions.

Explore is different altogether and offers opportunities for simple problem solving and decision making rather than language extension. It is an adventure game, though without the puzzles, cryptic clues and frustrations of adult versions. In *Explore* you journey through four levels of underground caves and rooms, and use compass directions to move. The aim is to collect the hidden treasure and return to the surface. There are various monsters to overcome by bargaining with your

Animal: Microprimer pack – MEP
Explore: similar adventure games are available from several distributors.

treasure or fighting. This, however, expends precious 'life force', when it reaches zero, the game comes to a premature end – you're dead! Magic spells help defeat the monsters but these can only be used once.

This might not appear to have much educational value, but I have found it useful with lower-juniors. It is a marvellous stimulus both for creative writing (stories about exploring, descriptions of magical surroundings etc) and for art (my class produced a wall collage showing rooms and caves mentioned in the program). Also, since no map of the caves is supplied children can devise one for themselves: a network seems the most suitable format and is a good introduction to this form of representation.

Perhaps the main value of *Explore* lies in its requiring children to weight up conflicting courses of

action and see what happens as a result of their decisions. Forward planning is essential to succeed and some routes are more sensible than others. When the children are debating which route to take I encourage them to reason out why one seems preferable. Other children can then put their views and the class can argue it out.

Finally, I should point out differences in classroom organisation that stem from using *Explore* rather than *Animal*. In the latter the children's thinking becomes part of the program (in the form of discriminatory questions) and thus can be appraised subsequently using, for example, a printout. With *Explore* this is not the case and discussion should be monitored by the teacher. Also, *Explore* can take half an hour to play, so is not ideal for the teacher who wishes to allow all his groups to take their turn on the micro during the day. It seems better to use *Explore* with a whole class – children can take turns to suggest the next move.

Charles Bake

TEN POINTS TO NOTE


- Programming is about problem solving, it is not particularly about coding programs into a particular language.
- Early success is often paid for by later failure if good habits are not developed.
- Do not allow a small minority who show an exceptional ability in programming to make progress at the expense of everyone else.
- Remember that good programming is like literature, it is an art of communication.
- Look carefully at available languages before choosing one to use with your pupils.
- Be alert to the danger of making programming a boys' activity and always ensure girls have at least as much time on the computer.
- Do not allow pupils to spend a long time thinking about programming while at the screen, insist they go away and try to solve the problem at a desk.
- Use squared paper at the design stage to save typing time and reduce errors.
- Consider using graphics because of their motivation value, whatever the language.
- Many pupils need constant encouragement if they are not to become discouraged. They also need careful guidance to ensure they do not attempt programs beyond their capabilities.

Next month: Language development in primary school children

MICROAGE

ELECTRONICS

BIG value in small printers

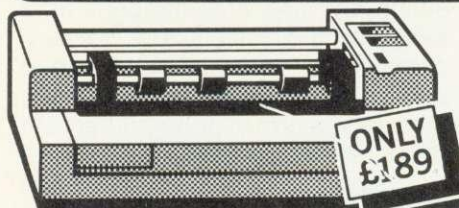

The Incredible Seikosha AP80

The AP80 is probably the world's LOWEST COST, compact 80-column graphic dot-matrix printer available.

It can produce single and double width characters and has the ability to produce any pattern through its dot-matrix capability.

The AP80's robust construction and its unique "unihammer" make it an extremely cost effective and efficient printer.

Its features include


80 Cols 30 cps • Dot Matrix Unihammer action • 96 ASCII standard characters • Up to 8" paper width • Upper and lower case • Double width printing • Standard interface: Centronics

The Amazing Seikosha AP100

Big brother to the AP80 the AP100 is a wider more sophisticated version of the AP80 with a full graphics capability and the ability to take standard width computer stationery, the AP100 is an ideal choice for anyone with a microcomputer.

Its features include:

80 cols 30 cps • Dot Matrix Unihammer action • 116 ASCII standard characters • Full graphics capability • Up to 10" paper width • Upper and lower case • Double width printing • Centronics interface: Only £215.

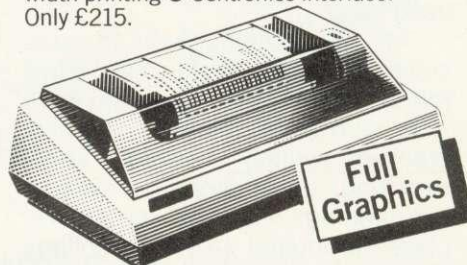

Official Orders Accepted

At Microage you can now get the very best value in microcomputer printers. We've selected only the best printers available so you can choose confidently, knowing you're getting the best value for money.

Free Cable + paper with printers

Accessories

Seikosha GP-80 Ink Ribbon £4.75 (75p p+p)
Seikosha GP-100 Ink Ribbon £5.75 (75p p+p)
Dust and sound Cover £3.95 (75p p+p)

Please Rush me details of all Printers.

Name _____

Address _____

The computer I shall be using it with is: _____

AU 4

MICROAGE ELECTRONICS

135 HALE LANE EDGWARE MIDDLESEX HA8 9QP TEL: 01 959 7119 TELEX 881 3241
Open Mon - Sat 9.15 am - 6.00 pm. Thurs 9.15 am - 1.00 pm.

DEALER ENQUIRIES WELCOME
CALL 01-959 7119
FOR TRADE PRICES



FLOPPY DISC DRIVES

SINGLE AND DUAL DISC DRIVES
40 OR 80 TRACK FOR BBC MICRO

includes utility disc and Dos-Manual Phone for prices:—

BBC MICRO

BBC COMPUTER MODEL 'A' £262.00 + VAT
BBC COMPUTER MODEL 'B' £349.00 + VAT
BBC COMPUTER WITH DISC £410.00 + VAT

MONITORS

High resolution 18 MHZ 12" Green Phosphor Monitor

£99.00 + VAT

Includes Cable

OTHER ITEMS AVAILABLE FOR THE BBC MICRO

Books, Cables, Joy Sticks, Cassette Decks, Dust Covers, Teletext Adaptor, Speech Upgrade.
SEND FOR PRICE LIST

SEIKOSHA GP-100A



- ★ DOT MATRIX PRINTER
- ★ 80 CHARACTERS PER LINE
- ★ 30 CHARS/SEC
- ★ FREE HI-RESOLUTION 'DUMP OUT' LISTING

£179 + VAT. Carr £6

BBC Printer Cable £16 + VAT

BBC MICRO

WORD PROCESSOR
ROM £46.00

CHESS £11.50
ASTEROIDS £ 8.95
GLAXIAN £ 8.95
BILLIARDS £ 8.50
FROGGER £10.00
GOLF £ 8.00



BBC MICRO MICRO UPGRADES

RAM KITS: Upgrades the Model 'A' to 32K RAM
Supplied with full fitting instructions. £29.90 + VAT
ANALOGUE KITS: Suitable for adding joysticks, controllers etc. £15.00 + VAT
PRINTER INTERFACE & I/O PORT: Enables a Centronic Interface printer to be attached ... £16.00 + VAT

MODEL 'A' TO MODEL 'B' UPGRADE

£89.00 + VAT (fitted)
DISC EXPANSION. £80.00 + VAT
DISC DRIVES from £179.00 + VAT
COLOUR MONITORS from £229.00 + VAT

Send for details on other items, cables, cassettes, plugs, software etc.

WHY NOT SEND YOUR MACHINE TO US FOR UPGRADING?

PRINTERS

EPSON MX80 F/T3 — The printer recommended for the BBC Microcomputer.

- ★ Dot Matrix Printer
- ★ 80 Cps
- ★ Hi-Resolution Graphics
- ★ Bi-directional Printing



SPECIAL PRICE
£329 plus VAT
Printer Cable
£16 + VAT

Q-TEK Systems

Telephone STD (0438) 65385
2 Daltry Close, Old Town, Stevenage.

BBC
Service & Information Centre.



TEACHERS NEED MORE PROGRAMS

THE software in the *Micro Primer* package is perhaps the least satisfactory element. Only a small amount of that promised is supplied as only one of the four packs is available. Thus instead of receiving 30 software items with their machines, schools will get only 11. Of these, two are short programs designed to help set up the system; one is simply a datafile used by another program and the pair called *Mquiz* and *Quiz* are two stages of the same activity. So there are really only seven discrete items. For schools with good LEA support, this may not be too serious a blow, but for others eight programs is shamefully few.

These seven distinct pieces of software vary substantially in the extent of their value to primary teachers. The programs are designed mainly for use by individuals or small groups working without direct supervision. While some have been specially written for the package, others have been drawn from a variety of sources and collected together as examples of the 'kinds of computer based learning currently available for primary schools'. When the 50 promised programs are available they may present a spectrum of possible educational uses, but the initial package is too small to meet this objective.

A teachers' booklet gives full documentation on each program and contains suggestions for pupil activities and occasional sample worksheets. This documentation is clear and easy to follow and is machine specific. The notes in the

Heather Govier looks at the software in the *Microprimer* pack for primary schools. Her verdict, not enough and could do better

teacher's book are written with the assumption that teachers will explore the programs themselves at the computer before allowing them to be used by pupils. This is essential if maximum educational benefit is to be derived from any software.

The programs vary considerably in format but all make some use of colour. This presents problems with black and white monitors as some colours do not show up clearly. Moreover, the use of colour seems to have been grafted on to the programs as an afterthought.

I shall now run through the packages one at a time. *Crash* presents an obstacle course chosen from a menu of options around which a vehicle (represented by an arrow) must be directed to move by a set of instructions which effectively constitute a program. It is thus like a screen version of Bigtrak or a simple form of Logo. *Crash* differs from the standard maze program in that the full series of instructions must be typed in at the outset and these are then executed. Thus the similarity to Bigtrak is stronger than to Logo. If a program results in a 'crash', pupils can edit their instructions and use a trial-and-error strategy. The teacher's notes suggest the courses be duplicated on paper so

pupils may plan programs away from the computer, also that the program is best used as part of a coordinated scheme at work including Bigtrak and Logo.

When used in this way *Crash* could be a valuable activity. It serves as an introduction to the concept of a program and the process of debugging can help develop sound programming skills. This problem solving exercise is one of the most interesting and valuable of all the programs in the *Micro primer* package. It lacks the sophistication of Logo but makes a good starting point. The program is recommended for pupils between the ages of 7 and 14 but could well be used (in conjunction with Bigtrak) with bright infants.

Shopping provides a graphic simulation of a visit to the shops and aims to give practice in handling change, planning a short sequence of events and accounting for small sums of money. The child must 'visit' five shops to purchase items presented initially as a shopping list. At each shop the financial calculations involved in the purchase must be made and the whole expedition must be completed in 10 minutes. A sample worksheet is provided on which the child can record results of the expedition after the program has been completed.

A worksheet would be more valuable if used during, rather than after, the session with the computer, but clearly this would result in a considerable increase in the time taken. In any case, the use of a time limit is counterproductive.



Yes, it's Bjorn Borg, the recently-retired tennis star. These pictures use 82,000, 655,000 and 2.6 million bits to store the image as seen in *The Computer Book*.



It is surely preferable to encourage pupils to be accurate and careful rather than to rush through any activity – and the timing here is remarkably tight.

I doubt whether this program achieves anything which could not be better done by the use of the traditional class shop. The program makes little use of colour as all pictures and text are blue. Furthermore, there are bugs in the program which result in correct response being occasionally rejected.

It is unlikely that *Diet*, originally developed for biology at secondary level, will be useful to many primary teachers. The program is recommended for pupils aged 10 to 15, which includes only fourth year juniors.

The purpose is to allow pupils to match their own diet, or that of another individual, to a recommended one. It could be used as part of a project on food or to illustrate the use of computers for data collection, analysis and display. However, pupils must be familiar with terms such as megajoule, kilojoule and gram, and the use of code numbers instead of natural English for entering the food items is an encumbrance.

Much of the software available to primary teachers was written for secondary pupils. Some programs make the move better than others, but *Diet* is one which would have been better left as a secondary course.

Topic work is one of the most exciting areas in which a microcomputer can be used. Examples of this are given in *Micro primer* and the program *Litter* is a software illustration.

It is described as a simple decision-making program to simulate factors which might influence local elections. The user is set in the role of a local councillor seeking re-election who has decided to run an anti-litter campaign to curry favour with the electorate. *Litter* can be controlled by six options which can be revised weekly over the ten week run-up to the election. The campaign must be completed within a given budget.

Financial status and popularity index are constantly monitored and the object of the exercise is to keep the streets clean, become popular and win the election.

THINK OF AN ANIMAL (INSECT, BIRD, ETC.) THEN ANSWER MY QUESTIONS, YES OR NO. THINK OF AN ANIMAL (INSECT, BIRD, ETC.) THEN ANSWER MY QUESTIONS, YES OR NO.

IS IT A MAMMAL?
? NO
IS IT A BIRD?
? YES
CAN IT FLY?
? NO
IS IT AS TALL AS A MAN?
? YES
IS IT AN OSTRICH, CHARLES?
? NO
WHAT IS IT THEN? EMU
IF I WANTED TO CHOOSE
BETWEEN AN OSTRICH
AND AN EMU,
WHAT QUESTION SHOULD I ASK?

**A typical run of Animal.
See Charles Bake's review
on page 51**

IS IT A MAMMAL?
? NO
IS IT A BIRD, CHARLES?
? YES
CAN IT FLY?
? NO
IS IT A CHICKEN, CHARLES?
? NO
WHAT IS IT THEN? OSTRICH
IF I WANTED TO CHOOSE
BETWEEN A CHICKEN
AND AN OSTRICH,
WHAT QUESTION SHOULD I ASK?
? IS IT AS TALL AS A MAN
AND THE ANSWER FOR AN OSTRICH IS?
? YES
THANKS, CHARLES, I'LL REMEMBER THAT!
ANOTHER GO? YES

While the program is little more than a simple game, it could serve as a valuable element in a topic on environmental education. The nature of local politics, the litter problem, and the repercussions of various attempts to solve it could all be matters for discussion.

Mquiz, *Quiz* and *Birds* form a suite of software illustrating an important principle in the use of computers in schools – software flexibility. Pupils are not limited here with a ready-written quiz but are provided with a software tool to set up any number of multiple-choice tests or quizzes.

Mquiz allows the child to set up a quiz of up to 40 questions with up to five possible answers of which only one must be correct. When typing the questions and answers, editing is possible.

Once the full quiz has been set up the compiler is allowed to work through it and again may make any necessary corrections before the quiz is saved onto cassette.

The prepared quiz file can be used with *Quiz* to set questions. This program gives full instructions for loading files and for a short quiz this is very fast. Suggestions for storing data files are given in the teacher's notes. One benefit of the program is that it introduces pupils and teachers to the idea of saving data files, a facility also used in *Animal*. The value of the *Mquiz/Quiz* programs, because of their flexibility, depends entirely upon the skill of the teacher.

The use of *Quiz* as a tool for learning could be greater if users were told the correct answer when they made a mistake. Although the

teacher's notes suggest this, no information was given when using the program.

Animal is a version of perhaps the most ubiquitous computer game. The program can store approximately 130 animals but initially contains only two. Data files built up can be saved onto cassette. Although true editing is not possible the program does allow deletion of the last addition in case of errors. A more flexible package which allows the construction of branching keys on any subject has been produced by the ITMA Project but is not yet available for the BBC micro.

The final program, *Farmer*, invites pupils to solve the old problem of getting a farmer, his dog, a chicken and a bag of grain safely across the river. The boat will only hold the farmer plus one other item. If the chicken and grain are left together the grain will be consumed and if the chicken is left with the dog the chicken will be eaten.

The notes suggest the program is best used as a group or class activity with discussion. However, when used in such a way this software is limited. There is no scope for extension of the activity or generalising the problem-solving skills involved. A better version of a similar problem is available from the *Smile* software development project. Here the travellers consist of a variable number of adults and children and the boat will hold only one adult or two children. This problem, while in many ways similar to that presented in *Farmer* can be explored in greater depth as a mathematical investigation.

FINDING A HOME FOR MACHINE CODE

THE programmers at Acorn have expressed concern that Tony Shaw and John Ferguson did not emphasise the use of the Basic DIM statement as the standard way of reserving space for machine code routines in their February article 'Finding a home for machine code'.

As a reminder of how to use this, consider program 1. This is their preferred way to claim store on the BBC micro, and there is a further refinement which lets you use this scheme regardless of how large the machine code program grows. By making an extra pass over the code you can work out its size and DIM the array to suit. The extra pass places the code at address &C000 (on top of the MOS ROM) so it is not planted in memory. Then you make the normal two pass assembly. Program 2 gives an example.

This method of the four suggested by JF and TS is the only one guaranteed to work under all circumstances.

Please note that locations D00

to DFF are *not* for user routines. They are for routines which are essential to certain parts of the operating system. Programs written using this space will only work on cassette systems.

JF and TS reply: In the series our primary concern is for the beginner and with the excellent BBC assembler we hope many will be lured into the delights of assembly language programming. Consequently our approach is to tread warily in areas that we anticipate may cause difficulty for the reader.

Finding a home for the machine code provides many confusing concepts for the newcomer. Whilst the use of the DIM statement was covered in the article the emphasis given has not suited Acorn programmers – but then they are not beginners. (We are pleased their comment is constructive and the 'variation' is interesting).

Use of DIM is to be encouraged, but so is an understanding of the principles that control where the machine code is placed. Such understanding is vital if the

programmer is to readily apply the knowledge gained.

In many applications it is desirable to place the machine code at a specific location so it may be easily accessed from any language. Examples include the terminal simulation program and the PET printer driver described in earlier issues of *Acorn User*.

The *User Guide* conflictly described page D as 'space for user supplied resident routines' (p 501) and '... used by Disc or Econet filing systems' (p502). Believe page 501 if you don't have discs and page 502 if you do. A safe haven for user routines is a valuable feature which presumably disappeared as the disc operating system developed?

Final decision: There is bound to be serious discussion about the facilities offered by the BBC micro, and I am glad to see *Acorn User* as the major forum for this. The magazine is produced as a service to readers, who will be the final arbiters on these issues.

The Editor.

```

10REM Program to print "FRED"
20REM WITHOUT using fixed addresses
30OSASCI = &FFFE3
40
50REM Declare enough space for the string
60DIM message 4
70$message = "FRED"
80
90REM Pre-pass places code onto ROM.
100REM (This area is also unused in Tube machines)
110code_address = &C000
120
130FOR pass = -3 TO 3 STEP 3
140P% = code_address
150IF pass<0 THEN passopt=0 ELSE passopt=pass
160[ OPT passopt
170.start Lda message \ Get first byte
180      Jsr OSASCI \ onto screen
190      Lda message+1 \ Get second byte
200      Jsr OSASCI \ onto screen
210      Lda message+2 \ Get third byte
220      Jsr OSASCI \ etc...
230      Lda message+3
240      Jsr OSASCI
250      Rts
260]
270
280REM Now that we know how big it is,...
290IF pass<0 THEN DIM code P%-code_address : code_address = code
300
310NEXT pass
320
330CALL start
340END

```

```

10REM Program to print "FRED"
20REM WITHOUT using fixed addresses
30OSASCI = &FFFE3
35
40REM Declare enough space for the string
50DIM message 4
60$message = "FRED"
70
80REM Now declare space large enough for the code
90DIM code 32
100P% = code
110[
120.start Lda message \ Get first byte
130      Jsr OSASCI \ onto screen
140      Lda message+1 \ Get second byte
150      Jsr OSASCI \ onto screen
160      Lda message+2 \ Get third byte
170      Jsr OSASCI \ etc...
180      Lda message+3
190      Jsr OSASCI
200      Rts
210]
220CALL start
230END

```

Program 1

Program 2

THE PROFESSIONAL SOFTWARE PEOPLE

**multiple choice
questions and
answers pack
for BBC model B**



- *Specially designed for educational users*
- *For use with the BBC Model 'B' Micro computer*
- *£25.00 including VAT and P & P*

- *Instruction manual*
- *Master input mode*
- *3 Reception modules, each display questions and answers in a format suitable for students of different abilities and age groups*
- *Blank tape for data.*

Word Processing Pack

- *A simple to use tape-based word processing package*
- *Ideal for the small business or home user*
- *For use with the BBC Model 'B' Micro computer*
- *£10.00 including VAT and P & P.*

Word Processing Pack

Minefield

WCC

- An entertaining family game
- Try and cross the minefield without blowing yourself up!
- 3D graphics on Model 'A' and 'B'
- Only £5.95 including VAT and P & P.

[illegible]

.....





GAME FOR AN ADVENTURE?

Barry Pickles looks at four games for the Atom – and three adventures to whet your appetite

THE games described here need a 12k Atom and give a colour display, except *Astrobirds*. Each is a copy of an arcade favourite written largely in machine-code. They all came with clear instructions and loaded first time.

Omega Mission, comes from a new software house, Micromania, whose


catalogue has four arcade games for the Atom. This is a good version of *Scramble* and the action is reasonably fast and very smooth, the landscape scrolling to the left as you play. There are five stages with all the arcade features: fireballs, spaceships, missiles, mutants, caves and a tunnel. Keys

control up, down, brake, accelerate and fire. The keys are bit-mapped, so you may use them in combination to achieve movement in eight directions, firing as you go.


Completing the game presents a new, harder, mission. In the arcade version, if you get hit, the game returns to the start of the current




Omega Mission. . . fast and furious

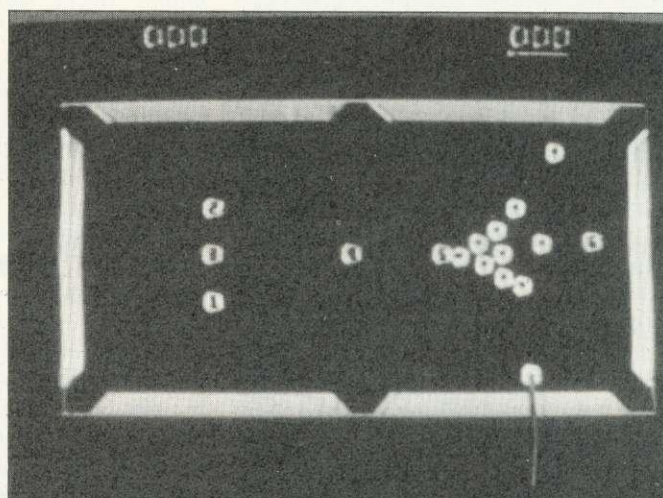

Snooker. . . slow but accurate

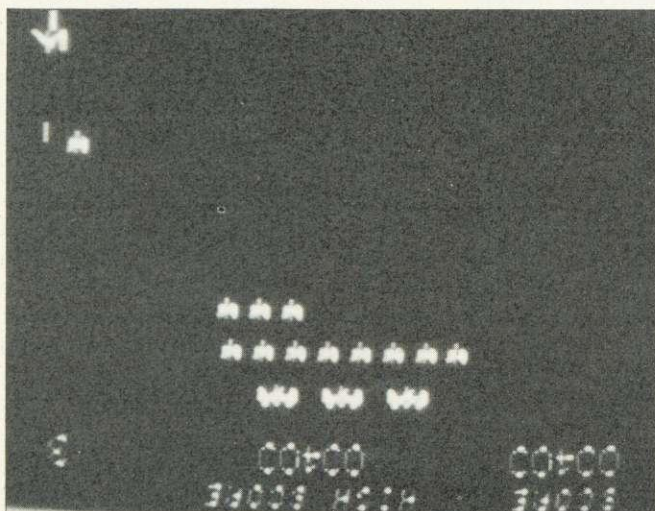

Astrobirds. . . swooping 'intelligence'

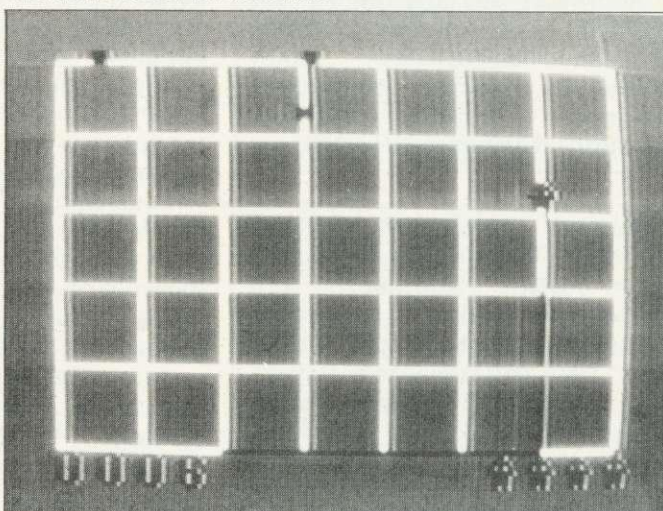

Painter. . . superb animation



ACORNSOFT

EDUCATIONAL

PACKS

FIVE educational packs have been released by Acornsoft, each with teachers' notes. The programs allow teachers to set a time limit for each child,

The first *Word Sequencing* (models A and B) presents a series of jumbled words which can be arranged to form proverbs, nursery rhymes or sentences. Words are moved using the cursor keys. *Sentence Sequencing* (model B) works similarly with jumbled sentences.

Word Hunt (A and B) consists of four programs, each containing a list of nine words. Pupils select one word at a time and from its letters create as many words as they can.

Addition, subtraction, multiplication and division are covered by *Missing Signs*. Pupils must calculate both sides of an equation before deciding whether the missing sign should be greater than (>), less than (<) or equal to (=).

Finally, *Number Balance* (model B) features a set of scales for practising simple mathematics with numbers from one to 20. Children have to balance the scales by putting the correct numbers into one side of a simple equation.

Acornsoft say the packs are available now on disc (£15.35) or cassette (£11.90), from: Acornsoft, Vector Marketing, Denington Estate, Wellingborough, Northants, NN8 2RL.

Suppliers: Hopesoft, Hope Cottage, Winterbourne, Surrey RG16 8BB; Acornsoft, c/o Vector Marketing, Denington Estate, Wellingborough, Northants, NN8 2RL; Program Power/Micro Power, 8 Regent Street, Leeds LS7 4PE; A&F Software, 830 Hyde Road, Gorton, Manchester M18 7JD, Micromania, 14 Lower Hill Rd, Epsom, Surrey (mail order only).

stage. Here, however, you return to the start of the game and completing the mission is a real achievement! Good sound effects are provided and the highest score is kept.

A challenging and addictive game for £7.

Program Power's *Astrobirds* is based on *Galaxians*, an old game by arcade standards, but with an enduring appeal. This version, from a well-established stable, opens with a fanfare and then the action begins, with swooping, screaming birdmen spraying bomb clusters. The attackers are 'intelligent', so if you move, they will try to follow. Like *Space Invaders*, there is no end to the attackers, so you can't win – just try to beat the high score. Control is easy, using three keys for left, right and fire. The screen is superbly detailed and shows both the current and the high score. The secret is to keep moving, so the aliens don't get a 'fix' on your position. After you have mastered the normal game, you can opt for a double-speed game – so fast as to be nearly impossible!

At £6.95, a fine version, with excellent graphics and sound effects.

Painter is a version of *Amidar*. Since this game is by no means commonplace, it takes some explaining. The screen displays a grid of cells, around which you move your 'painter'. As each side of a cell is traversed, it changes colour and, when all four sides have been passed, the cell is painted. The object is to complete a screenful of cells, but your painter is being pursued by 'Blue Meanies', who try to dislodge the painter from the grid – with fatal results! Completing the screen produces a new grid, with an extra painter – and an extra meanie.

Four keys control the painter's movement and a fifth allows you to leap over an approaching meanie (beware of jumping off the grid). There is also a 'panic' key, which makes the painter run, instead of walking. The animation is superb, the painter having moving arms and legs. If he's killed, he lies at the bottom of the screen, arms and legs in the air, whilst a Funeral March is played. Sound effects are plentiful and a score-ladder is

provided. There is on-screen scoring and a bonus is given for each completed screen, which 'clocks up', arcade style.

This game is not as easy as it sounds and is very addictive. In all, a fine game from A & F Software at £5.95.

'Snooker proved to be compelling at the local club'

Games Pack II from Acornsoft contains three games, all of which need a fully expanded Atom. The one reviewed here, *Snooker*, is in colour, although the balls are numbered for black and white sets. Normal snooker rules apply with penalty points for fouls. Shots are controlled by placing the cue at the required angle using any of four keys. The length of the cue determines the power of the shot.

Pressing CTRL plays the shot and the balls move correctly, albeit slowly. The game is for two players, control passing to the second player after a 'break'. There is no time limit for a shot but, otherwise, this game is a faithful reproduction of arcade versions and, in some ways, is an improvement on some.

Trying it out on my local computer club proved it to be a compelling game. However, because of its speed of play, you must allow for a longish session to complete a frame.

The other games on this pack are a complicated, action-packed version of *Missile Command* and a traditional version of *Dominoes*. At £11.50 for three games this pack is very good value.

THE popularity of adventure games is built upon their ability to present players with a series of challenges which may take weeks rather than hours to overcome.

The first package considered here is *Atom Adventures* from Acornsoft which provides three basic games. All adventures use the same principles, so this offering first loads a base, which is used to manipulate data for the three games. Once loaded, any game

can be selected by typing *RUN (filename), and loading takes about five minutes for each part. The first game, *Dungeons*, is a standard scenario, in which you explore a series of caves, collecting treasure. The map is simple to deduce and there are some nice touches of humour – for example, saying 'Man Utd' sends you back to the start and confiscates your treasure! The second game, *House* is built around a mansion inhabited by ghosts of 'famous' people – although I wonder what someone playing this game 30 years hence would make of Basil Fawlty, Reggie Perrin and Anna Ford! By the way, beware of Prince Charles who picks up *anything* left lying about.

The final game, *Intergalactic* is the most complex, and creates a galaxy with locations and characters based on the 'Dragonrider' series of SF novels. Three games for £11.50 has to be good value, but this pack is more suited to newcomers and will not provide a challenge for experienced gamers.

Adventure, from Hopesoft, is a full-blown game which takes the explorer into forests, caves, an old building and a castle (all familiar territory to experienced gamers) littered with trolls and other nasties. If you get stuck, try the Help facility – but it's not very helpful! There is not much humour here, but a lot of frustration and it will take you hours to crack, especially the final part! *Adventure* is well-written and good value at £6.75. Hopesoft also produce *Pirate Island* and a *DIY* adventure kit.

The next two games, from A&F Software, have both been the

'The author has foreseen the results of frustration'

subject of cash competitions and it is a measure of their complexity that few correct entries were received, from hundreds submitted. The first is *Death Satellite* set on an abandoned space station. Your task is to search for fuel to make the journey home. There are few

monsters, but a lot of 'natural' hazards. Many of the objects have more than one use and there are some subtle touches of humour. This game has a minor flaw in that it is possible (but unlikely) to complete your mission without exploring the satellite fully.

The other game is *Zodiac* – a pure fantasy. Players explore the houses of the zodiac in search of treasure,

'A real challenge with some unexplained twists'

encountering characters whose attributes correspond to their sign. This time there are no flaws and some of the clues are very subtle, providing a real challenge and some unexpected twists. Each game costs £6.90 and a third is in preparation.

The final game is *Adventure* from Program Power (a bit repetitive these names!). This is unusual in that it is written largely in Basic but it is every bit as good as the rest, a fact attested to by the fan mail kindly loaned to me by the author. The scenario is standard *Dragons & Dungeons*, the object being to rescue a princess, albeit a somewhat reluctant damsel. There are caves to explore, a castle to search and trolls and wizards to combat. Again, there is a niggardly Help function and the author has forseen the results of frustration by causing the game to terminate if obscenities are typed in! If you get hopelessly lost, you can write to Program Power for a clue. *Adventure* costs £6.95 and a version of *Nightmare Park* is available from the same source.

If you've never played an adventure before, try one – I'll bet you get hooked – and the great thing is that the whole family can join in. All the programs here are good value, although experienced users may find the Acornsoft pack disappointing. Finally, a word of thanks to authors and adventurers for providing crib notes, without which I might still be stuck at the keyboard.

CASSETTE BUG

FIX FOR 0.1

OPERATING SYSTEM

HERE, as a result of popular demand, we repeat the cassette filing bug patch, first printed in September's *Acorn User*.

Problems with the BBC micro's cassette filing system (0.1 operating system) can be relieved by the listing below. (Type *FX0 to find which OS you have.

Two factors need to be overcome. The first involves character output routines whereby complete Basic strings are sometimes not written to the tape. The second is caused by a hardware problem which corrupts certain files as they are written to the tape.

The modification, devised by Richard Russell of the BBC, is given below as a program to be typed into the BBC micro and RUN on startup. It contains a *KEY command on line 9 to ensure it is preserved over use of the BREAK key. Obviously, the modification is lost from memory if power is turned off and also on a 'hard reset' (rapid BREAK BREAK). Having installed the modification, SAVE it on the front of a tape to be LOADED whenever the computer is started up.

```
1REM OS 0.1 CFS PATCH
2REM <FIX1> restores register A
3REM over a PUTBYTE call.
4REM
5REM <FIX2> avoids tape corruption
6REM during SAVE and PUTBYTE
7REM
8REM Machine code is located at &DD0
9 *KEY 10 ?&218=&DD0: ?&219=&D:
   ?&20A=&D6: ?&20B=&D1M
10FOR I%=0TO1: P%=&DD0: GOSUB 50: NEXT
20 ?&218=FIX1: ?&219=FIX1 DIV 256
30 ?&20A=FIX2: ?&20B=FIX2 DIV 256
40END
50[ OPT I%*2
60.FIX1 PHA:JSR &F521:PLA:RTS
70.FIX2 CMP#&91:BNE GO:CPX#0:BNE GO
80TSX:LDA#102,X:CMP#&F7:BEQ TRAP
90LDX#0:TX LDA#&91:STA#&FE09:RTS
100.GO JMP(&DB60)
110.TRAP PLA:PLA
120JSR&P9D8:JSR&FB7B
130JSR TX:JMP&F7FB
140]RETURN
```


Three out of every four computers going into schools are BBC Micros.

Is there a lesson to be learned by every user?

As part of the current government subsidised scheme aimed at introducing micros to schools, the Department of Industry undertook a survey of machines available and made recommendations to education authorities all over the country.

The BBC Micro met their priorities exactly: it is economical yet fast and powerful, and it can justify the investment involved, through its capability to grow with the needs of the user and with the rapid changes in technology.

Teachers and education authorities agreed, and today it represents over three-quarters of all micros being ordered for schools across the country under the DOI scheme.

The BBC's choice too.

In choosing a machine to put their name to for their massive Computer Literacy Project, the BBC had the same set of priorities as the DOI. The BBC Micro is now an integral part of that project, which includes books, software, courses and a number of major television series, one of which, "Making the Most of the Micro" is now being broadcast.

All this for only £399.

The BBC Micro is light and compact. It generates high resolution colour graphics, and is capable of synthesising music and speech using its own internal speaker. The keyboard uses a conventional layout and typewriter feel.

The most sophisticated version (called

Model B) is available for only £399. (There is also a basic model available, the Model A, at £299.)

Designed to grow.

Last year the magazine "Which Micro?" said that the most attractive and exciting feature of the BBC Microcomputer was its 'enormous potential for expansion'.


This is indeed one of the features that sets it aside from the competition.

For example, as well as interface sockets to allow you to connect to a cassette recorder, and to your own television, you can also use video monitors, disc drives, printers (dot matrix and daisy wheel) and paddles for games or laboratory use.

You can also plug in ROM cartridges containing games with specialist application programs.

The Tube. A unique feature.

The Tube, which is unique to the BBC Micro, provides for the addition of a second processor via a high speed data channel. The possibilities are enormous. For example, the addition of a second

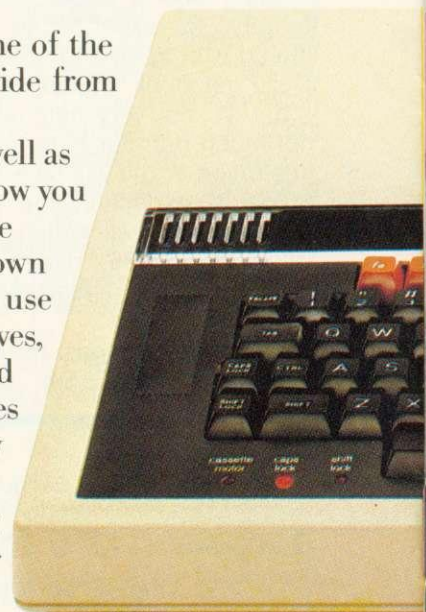

3MHz 6502 processor with 64K of RAM doubles processing speed. While a Z80 with 64K of RAM opens the door to a fully CP/M* compatible operating system, with all the benefits for business applications.

Linking up with other computers.

The BBC Micro also offers a facility of immense potential value to schools, colleges and businesses. It's called Econet®—a system which uses telephone cable to link with other BBC Micros. A number of machines can then share the use of expensive disc drive and printer facilities.

Make full use of Prestel & Teletext.

With special adaptors you will not only be able to turn your TV set into a Prestel terminal and Teletext receiver, but you can also take data and programs direct from these services. (The programs, which are known as telesoftware, are already being broadcast by BBC's Ceefax service.) This is another first for the BBC Micro.

BASIC plus.

A sophisticated version of BASIC has been chosen for the BBC Micro, which incorporates features normally found only in more advanced high level languages. However, there is also a facility allowing access through a simple command to another language—for example, PASCAL, FORTH and LISP.

*Trademark of Digital Research.



A full range of software.

Applications software for the BBC Micro already cover a very wide field. Packages covering games, education and business applications are available on cassette. All developed to the same high standards set by the hardware.

The best possible back-up.

Your BBC Micro comes with the backing of the BBC and an extensive dealer and service network.

Each approved dealer is able to offer advice and carry out expansion work and repairs.

BBC Microcomputer – Model A and Model B.
2MHz 6502A Processor.
32K ROM; 16K RAM Model A, 32K RAM Model B.
Full QWERTY keyboard with 10 user-definable function keys.
Mixed high resolution graphics and upper and lower case text.
300 baud and 1200 baud interface for standard cassette recorders.
Three-voice music synthesis with full envelope control feeding internal loudspeaker.
Interface sockets (Model B only) – RS423, for analog inputs centronics and user port.
6502, Z80, 16032 second processors.
Single and Dual Disc Drives with 100 and 800 K-bytes storage.
Teletext unit.
Speech synthesis.
Networking facility – via Acorn Econet.®

How to buy your BBC Micro.

If you are a credit card holder and would like to buy a BBC Micro B, or if you would like the address of your nearest stockist, just phone 01-200 0200.

Alternatively, you can buy a Model B directly by sending off the order form below to: BBC Microcomputers, c/o Vector Marketing, Denington Estate, Wellingborough, Northants, NN8 2RL.

All orders are despatched by fully insured courier and come complete with easy to follow 500 page User Guide and Welcome cassette.



01-200 0200 credit card holders.

To BBC Microcomputers, c/o Vector Marketing, Denington Estate, Wellingborough, Northants NN8 2RL.

Please send me _____ BBC Model B Microcomputers at £399 each, inc. VAT and delivery. I enclose PO/cheque payable to Acorn Computers Limited Readers A/C or charge my credit card.

Card Number _____

Amex/Diners/Visa/Access (Delete)

Name _____

Address _____

Postcode _____

Signature _____

AU4

Registered No. 140 3810 VAT No. 215 400220

The BBC Microcomputer System.

Designed, produced and distributed by Acorn Computers Limited.



In January's issue, I introduced you to Fred, Jim and Sheila, the three pages of memory-mapped input/output on the BBC micro, and explained how they could be accessed using byte indirection (? - the equivalent of peek and poke). However, this is the 'unofficial' way of doing it - the recommended way is to use the operating system calls. If you faithfully stick to using the routines provided within the operating system, all your programs will still work when you add a second processor, or upgrade your machine.

Sheila accesses all the interface hardware on the machine itself, including the 6522 versatile interface adaptor used for the printer and user ports, but if you want to hang more hardware onto your machine than can fit onto the user port you will have to start using Fred and Jim - the 1 MHz interface bus.

Figure 1 gives suggested memory allocations for the 1 MHz bus and shows the sort of devices Acorn are anticipating we will be linking onto it. It confines 'user applications' to memory locations &FCC0 to &FCFE, but the memory locations mentioned do not include Jim (&FD00 to &FDFF). This is because these locations along with

Paul Beverley introduced the 1MHz interface MOVE OVER TO

FC00 - FC0F Test hardware
FC10 - FC13 Teletext unit
FC14 - FC1F Prestel unit
FC20 - FC27 IEEE 488 interface
FC30 - FC3F Cambridge Ring interface
FC80 - FC8F Test hardware
FCC0 - FCFE User applications
FCFF Paging register

Figure 1. Address allocations for Fred

the 'paging register' (&FCFF) are to be used to allow the addition of 64k of 'paged memory' which will be explained later. First we need to look in detail at how to attach devices to Fred and before we can do that we need to look at exactly

what facilities are provided on the 1MHz bus connector.

It will be worth referring to the circuit diagram of the 1MHz bus interface (*User Guide*, p.503) when considering individual lines on the connector. The 'N' at the start of line names like NPGFC and NIRQ means they are 'negative active', ie it is when they go to logic 0 that they perform their specified functions.

A0 - A7 (pins 27-34) are the eight low address lines of the 6502 which, when combined with one of the page select lines, can be decoded to identify any address between &FC00 and &FDFF. They are buffered by a 74LS244 which is permanently enabled, so they are always active.

D0 - D7 (pins 18-25) are the eight data lines from the processor. They are buffered by a 74LS245 which is a bi-directional buffer since the data has to be able to come from the processor to the devices on the bus and vice versa. However, this buffer is only enabled when either Fred or Jim is being

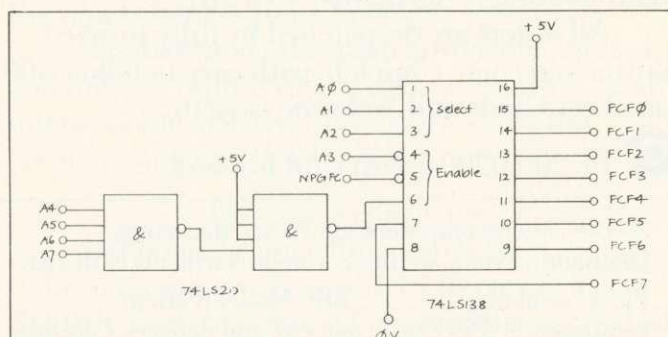


Figure 2. Simple address decoding for user applications.


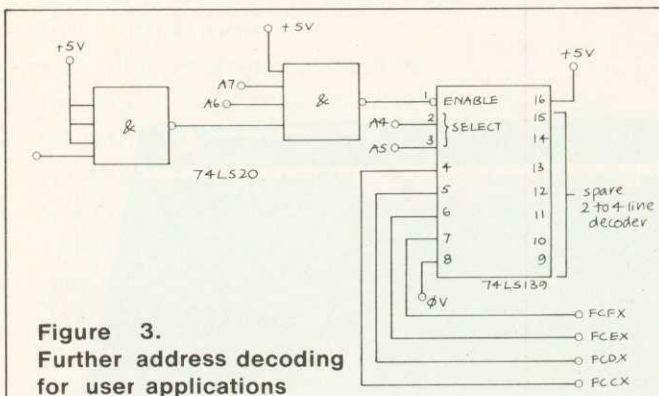


Figure 3. Further address decoding for user applications

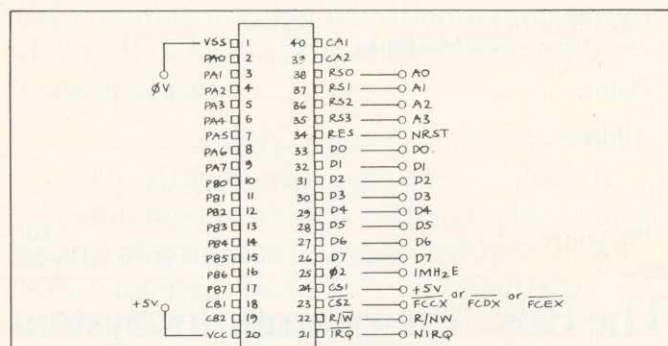

FRED AND JIM

accessed, and the direction of data flow is controlled by the read/write line from the processor.

Each of lines NPGFC and NPGFD (pins 10, 12) is decoded from the top eight bits of the processor's address lines to select pages &FC00 and &FD00. They go low when the processor tries to access a device in the given page.

Analog in (pin 16) is an input to the audio amplifier on the computer. Any signal applied here will be added to the sound or speech already being passed to the amplifier. Its input impedance is 9kohms and in the absence of any on-board speech or sound signals it requires 3V rms for full volume output to the speaker, but if you do use the speech or sound as well, the full 3V will cause distortion.

NRST (pin 14) is an *output only* from the computer and goes low on power-up when the Break key is pressed. It can therefore be used to initialise devices on the bus to a known condition.

NIRO (pin 8) is the usual IRQ (interrupt request) line of the 6502

processor but because many functions of the machine use interrupts, it should be left well alone unless you know what you are doing.

NNMI (pin 6) is not non-maskable interrupt. Again, this interrupt line should not be played with unless you have 'an advanced knowledge of 6502 programming techniques', as the Acorn application note puts it. This is especially so if you have a disc system.

1MHzE (pin 4) is a system clock for the devices on the bus and is derived from the master clock for the processor, which is 2MHz. When devices on the bus are being accessed, the processor clock pulses are therefore 'stretched' by a special circuit so they coincide with the 1MHz clock pulses.

R/NW (pin 2) is the 6502's read-write line, buffered to improve its drive capability.

(Pins 1,3,5,7,9,11,13,15,17 and 24 are all 0V lines to act as screens where adjacent lines are non-synchronous.)

The idea of address decoding is

that each device connected to the data lines must only be enabled when a particular combination of 1s and 0s appears on the address lines and the appropriate page select line also goes low. If you are sure you will never want to attach more than a few simple devices onto the bus and will not decide later to add more things onto the bus, you don't need to decode all eight lines. You need only do just enough to discriminate between the devices you have got. However, it is not that difficult to do the decoding properly and is worth the effort in the long run.

Figure 2 shows what is needed to attach a few simple devices onto the bus and have them addressed in the range suggested by Acorn for user applications. It uses a single 3 to 8 line decoder chip and a single chip with a couple of four input NAND gates in it. One of the gates is only being used as an inverter, so if you are designing circuits to be attached to the bus, you might be able to use an inverter from another chip, leaving the second four-input gate for other decoding. The address range it uses is &FCF0 to &FCF7, for no other reason than that, within the user application addresses, these can be decoded with the minimum number of gates.

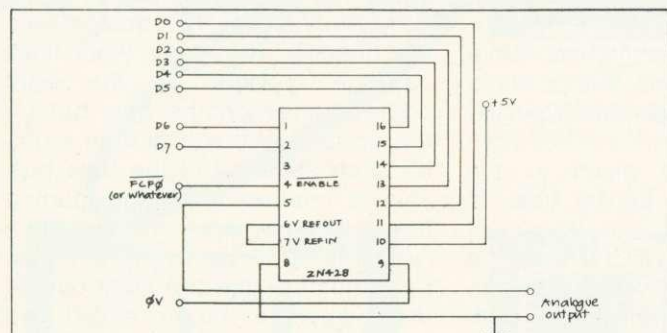


Figure 6. Connecting to ZN428 digital to analogue convertor

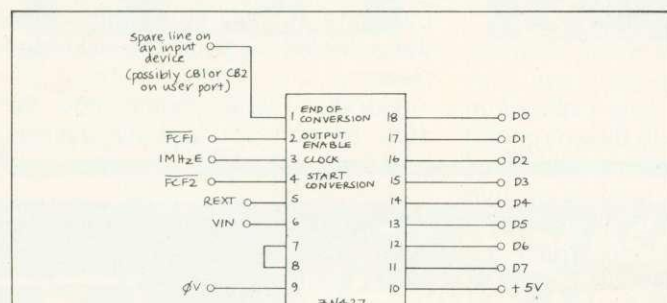


Figure 7. Connecting to ZN427 digital to analogue converter. To start conversion read &FCF2: to read resultant value, read &FCF1

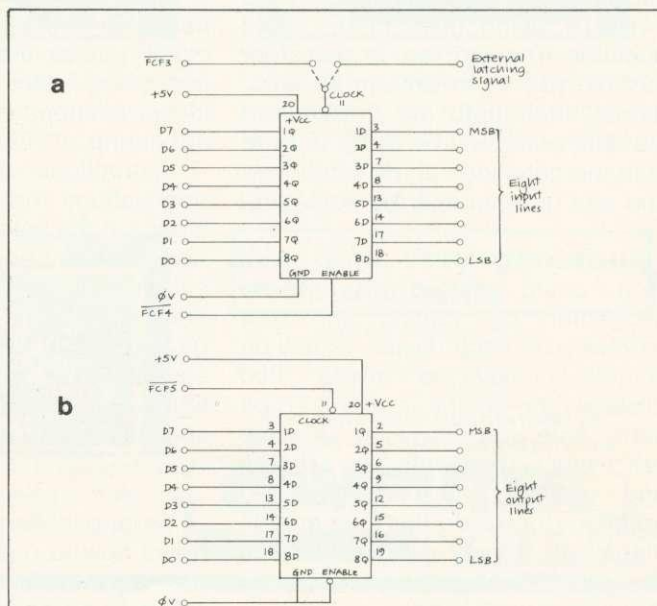


Figure 8. Connecting to eight-bit latch.
(a) Input: Data latched when clock input goes logic 1 to logic 0. To latch data either read &FCF3 or use external signal. To read data, read &FCF4
(b) Output: To output data, write to &FCF5
 Output is permanently enabled by OV on enable input

The circuit in figure 2 will connect eight individual devices such as ADCs or DACs or eight-bit latches, but to link devices which have a number of internal registers such as 6522 versatile interface adaptor you will have to arrange your initial decoding as in figure 3. This divides up the user applications addresses into four groups of 16 address, and since the 6522 has just 16 register addresses it can be enabled by one of the lines this circuit provides. However, Acorn's note suggests we avoid using &FCFF, so if you want to add a VIA, it is better to attach it to either &FCCX, &FCDX or &FCEX. The connections for a 6522 VIA are shown in figure 4.

If you have got that far and want a few lines for extra individual devices, you can use the other half of the 74LS139 to give four extra individual address lines (figure 5), or use another 74LS138 to provide eight more lines.

Figures 6, 7, and 8 give examples of how to connect various devices onto the bus using the individual address lines provided by the decoding. The only thing to be careful of is when interfacing to devices that are being used as inputs to the system such as the ADC in figure 6 or the 74LS374 being used in the input direction. The problem is that if by mistake you try to write to an input device, then both the device and the data buffer will be trying to write onto the data lines at the same time and one or other may be damaged.

You could remove the problem altogether by putting in extra hardware on each device, or rely on yourself never to make that mistake—the choice is yours! To be really safe, you have to use the processor's read/write line (R/NW) and gate it with the decoded address to provide the chip enable (figure 9). It only requires half of one 74LS00 chip for each device that needs protecting.

In Acorn's applications note on the 1 MHz bus, it mentions a problem with the page select lines.

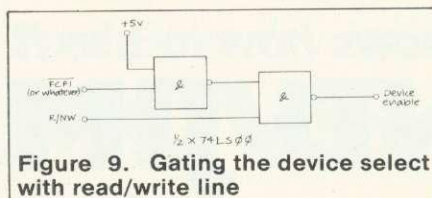


Figure 9. Gating the device select with read/write line

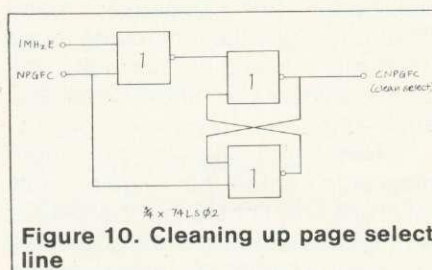


Figure 10. Cleaning up page select line

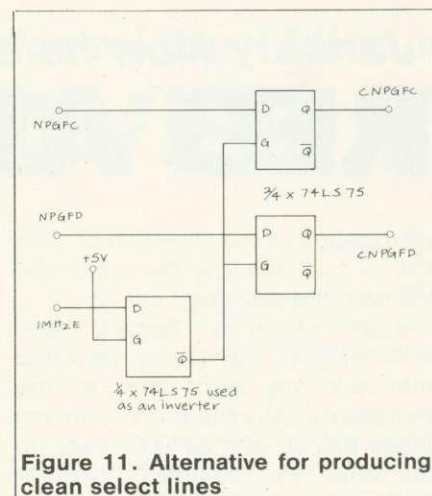


Figure 11. Alternative for producing clean select lines

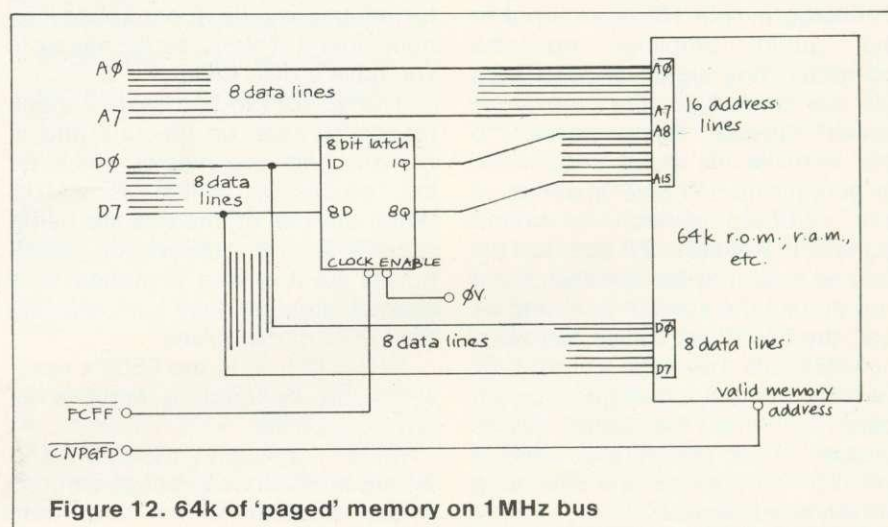


Figure 12. 64k of 'paged' memory on 1MHz bus

It is rather technical, but basically, because of the way the processor clock pulses are 'stretched' while accessing 1 MHz bus, it is possible to get spurious page select pulses appearing.

Instructions are given in the applications note as to how to clean up the select lines. If you just want to use page &FC00 then the circuit in figure 10 will do the job admirably. If you want to use both pages &FC00 and &FD00 then the suggestion is to use the circuit in figure 11 which cleans up both lines using only one chip.

The applications note explains in detail how to provide 64k of paged memory addresses on the bus. There is no space here to go into too much technical detail, but as a matter of interest, let me explain the principle which is illustrated in

figure 12. To address 64k of ROM, RAM or whatever, 16 address lines are needed. The lower eight lines can be provided by the eight address lines on the bus, but for the upper eight, you use an eight-bit latch attached to the data bus. This is referred to as the 'paging register'. You store in this latch (which is addressed at &FCFF) the page number (the top eight bits) of the memory to be accessed and then read and write to page &FD00. All data transfers which the processor makes to and from this page are actually going through to the selected page in the extended memory.


Hopefully you should now be able to connect various devices onto the 1 MHz bus.

● BBC Microcomputer Applications Note 1 – The 1MHz Bus, from Acorn Computers at £2.50.

June's Acorn User will feature an article on interrupts

Software for the BBC Micro

from **COMPUTER CONCEPTS**
Wordwise

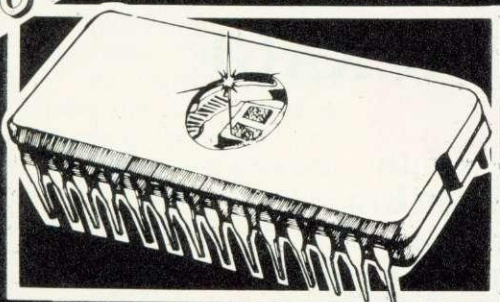

for the BBC Microcomputer Model B

The word processor for the BBC machine. This ROM based word processor has received superb reviews. Supplied with full spiral bound manual and cassette containing an example document and free typing tutor program. Now available from stock. Quantity Discounts.

£39.00 + £1.50 p&p + VAT.

from **COMPUTER CONCEPTS**
Forthcoming ROMs

Beeb-calc

A ROM based spread sheet program.

Debugging Program

2 machine code debugging programs — one in ROM, one on tape. Essential for the machine code programmer. An ideal complement to the assembler built into the BBC machine.

Disk Doctor

A ROM containing useful disk utility programs. Enables the recovery of any data off the disk including deleted files etc.

Available Soon!
SEND FOR DETAILS

from **COMPUTER CONCEPTS**
Games
FOR THE MODEL B.

NEW!

SWARM
Alien against you, mode 2 graphics. Very fast. £7.80 + VAT.

Spacehawks



Mode 2 graphics, a machine code game much like the 'Galaxians' found in the arcades — very fast and also works with joysticks.

£7.80 +VAT


Asteroid belt



High speed and high resolution graphics are combined in this game to produce an exciting game — almost identical to the original arcade version.

£7.80 +VAT

Chess

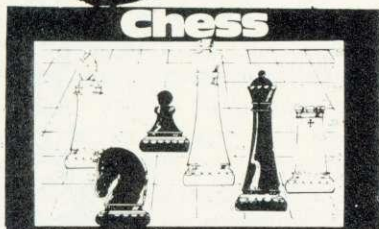

High resolution graphics with thousands of skill levels — more features than any other chess game.

£10.00 + VAT.

Snake



Another game that has received very favourable reviews — Fast and addictive.


£7.80 +VAT

We give very generous trade discounts

Cash or royalties — we pay the best rates around for any good BBC micro software.

Our tapes are guaranteed to work on all Operating Systems.

COMPUTER CONCEPTS



Dept AC6
16 Wayside, Chipperfield,
Herts, WD4 9JJ. tel (09277) 69727



Salamander Software PRESENTS

EDG GRAPHICS PACKAGE

Salamander Software has recently obtained sole U.K. marketing rights to a sophisticated graphics package for use with the BBC Model B microcomputer. The package was developed by a firm of consultants and design engineers to the oil and utility industries for in-house use, and has now been assembled in commercial form for applications in the home, business and schools.

The package consists of an advanced picture drawing system controlled entirely by normal keyboard input and using cassette tapes for software and picture storage, so that no additional hardware is required.

THE MAIN SYSTEM FEATURES ARE:

- ★ Picture drawing in mode 0, 1 or 2
- ★ Actual and Logical colour changes at any time
- ★ Drawing functions include lines, boxes, circles, arcs, text and shape repetition
- ★ Drawing aids include grid, elastic band, save and home cursor (5 positions)
- ★ Colour fill
- ★ Text window showing X, Y cursor position, length, angle, colour menu and current colour
- ★ Saving and loading of pictures using cassette tapes
- ★ Multi file picture
- ★ Flashing crosshairs cursor
- ★ User instructions/prompts
- ★ Spiral bound manual

PRICE £24.95 inc VAT

Available from:
Salamander Software
27 Ditchling Rise
Brighton
East Sussex
BN1 4QL

or ask at your local Acorn dealer
Trade enquiries: Tel: B'ton (0273) 771942

Send stamped s.a.e. for full catalogue





FASTER THAN BASIC

The utility writing language BCPL arose, in the late 1960s, from the ashes of a project to produce CPL – the Combined Programming Language – by Cambridge and London universities. CPL aimed to produce a more powerful and consistent block-structured language to replace earlier languages like Algol 60. Whilst the CPL project had some very useful ideas, its sheer size and complexity caused it to collapse without a full compiler ever being produced.

Much had been learned, however, about desirable features in programming languages, and some of the original workers on the project took the ideas, trimmed them down to size and produced BCPL (Basic CPL). After about five years BCPL became established in its final form, and since then has found world-wide favour as a small yet powerful, efficient, medium-level language for compiler writing and system software implementation. The BCPL compiler is itself written entirely in BCPL, and many operating systems have used it, notably Tripos, which under various commercial guises is proving a powerful alternative to Unix on 16-bit micros and minis. In addition, BCPL is valuable for word-processors, adventure programs and, because of its speed, real-time games.

BCPL has, in its turn led to new languages. In America, it became the B programming language. This did not last long, but was improved to form the C language, which among other things, was used to write Unix. BCPL has even affected Basic. Users of Acorn Atoms and BBC micros have many of the features of BCPL incorporated in the Basic of their machines.

BCPL is a fully recursive block-structured language, after the style of Algol or Pascal. Unlike these languages, which have many data types such as floating-point, integer, strings etc, BCPL has only one type, the BCPL word. This can be considered as an integer, usually of 32 bits (on mainframes) or 16 bits (on micros). 16-bit

Stan Froco gives an introduction to BCPL, a fast language which is valuable for word processing, adventure programs and real-time games

MORE LANGUAGE ROMS ON THE WAY

SEVERAL languages are being developed in the form of ROMs to be plugged into the Beeb. Word-processing packs already make use of this facility, but BCPL is the first language to do so. It should be available from Acorn-soft by the end of April.

The 116k ROMs come complete with a 40-track disc containing the BCPL utilities and a 450 page manual. The disc carries 11,000 words in 22k (BCPL uses two bits per word), and extra copies of the manual will be sold separately.

Machines must be fitted with the 1.2 operating system to run the language, and this is supplied free of charge when a dealer fits the ROM (fitting inclusive).

implementations will be described, although the differences from 32-bit implementations are not generally important. Various operations are provided on these words, such as arithmetic operations, shift operations

and Boolean operations, as well as routines to print them out as decimal or binary numbers.

BCPL uses the same datatype for text. Since an ASCII character requires eight bits, you can hold two characters in a BCPL word. Since there is no datatype distinction you are perfectly at liberty to consider these as numbers and add them or apply any other operation if you so desire. The result in this case is not particularly useful, since all that will happen is that the ASCII values will be manipulated. However, the ability to hold, say, a label or procedure in a variable so simply can be useful. For instance the following piece of code calls either a routine SUB or a routine ADD with arguments EXP1 and EXP2, depending on the value of OPER:

```
PROC := OPER = '+' -> ADD, SUB
PROC(EXP1, EXP2)
```

The first command means give variable PROC the value ADD if OPER is equal to '+', else give it the value SUB. In Basic this would be:

```
IF OPER = "+" THEN LET PROC =
ADD ELSE LET PROC = SUB
```

In fact all objects in BCPL are represented as BCPL words. A label for a GOTO statement is just the 16-bit value pointing to that place in the code. Similarly procedures are just 16-bit addresses of the start of the procedure. You can even multiply labels or subtract procedures: not particularly useful but perfectly legal.

This may itself not seem important, but, what is important is that a BCPL word may hold a 16-bit address. Since BCPL uses 16-bit words, the address of a BCPL word will be only half the address of the byte in memory. Thus the fourth byte in memory will be the second byte of the second BCPL word.

BCPL has an operator to use addresses. This is the indirection operator, '!'. Thus, while in BCPL the assignment B := 4 will give B the value 4, the assignment B := !4 will give B the value held in the fourth BCPL word in store. This is rather

page 71 ►

BBC MICROS ACCESSORIES

Overseas
dealers and distributors
enquiries welcomed.
Exports a speciality
(p&p-Europe 50% extra,
Rest of World
75% extra)

MMS042 MICRO BUDGET
MMS043 FILER
MMS044 CONSTELLATION
MMS045 BEEBEE
MMS046 MICROBERRY
MMS047 SPACE PIRATES
MMS048 CHESS
MMS049 HUMIDITY & TEMPERATURE

(PROGRAM POWER) £ 7.99
(PROGRAM POWER) £10.29
(CSL MICRO-BYTE) £ 6.84
(BUG-BYTE) £ 4.60
(BUG-BYTE) £ 5.50
(BUG-BYTE) £ 8.00

MMS050 CLOCK/CALENDAR
(CHRIS HALL ENG) £24.00
MMS051 ILLUMINATION
(CHRIS HALL ENG) £35.50
MMS052 TEMPERATURE
(CHRIS HALL ENG) £18.00

MMS053 ARCADIAN
(ACORN/ST) £ 9.95
MMS054 SNAPPER
(ACORN/ST) £ 9.95
MMS055 CREATIVE GRAPHICS
(ACORN/ST) £ 9.95

MMS056 TREE OF KNOWLEDGE
(ACORN/ST) £ 9.95
MMS057 BUSINESS GAMES
(ACORN/ST) £ 9.95
MMS058 PEEKO-COMPUTER
(ACORN/ST) £ 9.95
MMS059 ALGEBRAIC MANIPULATION
(ACORN/ST) £ 9.95

MMS061 MONSTERS
(ACORN/ST) £ 9.95
MMS062 PLANETOID
(ACORN/ST) £ 9.95
MMS063 ARCADE ACTION
(ACORN/ST) £ 9.95
MMS064 DESK DIARY
(ACORN/ST) £ 9.95
MMS065 PHILOSOPHERS QUEST
(ACORN/ST) £ 9.95

MMS066 LISP
(ACORN/ST) £ 9.95
MMS067 GRAPHS & CHARTS
(ACORN/ST) £ 9.95
MMS068 CREATIVE GRAPHICS (BOOK)
(ACORN/ST) £ 9.95
MMS069 LOGO II
(ACORN/ST) £ 9.95

MMS070 FRUIT MACHINE
(ACORN/ST) £ 9.95
MMS071 FORTH
(ACORN/ST) £ 9.95
MMS072 WITCH-HIKER
(ACORN/ST) £ 9.95
MMS073 SPACEMAN
(ACORN/ST) £ 9.95
MMS074 SPACEMAN
(ACORN/ST) £ 9.95

MMS075 ASTEROID BELT
(ACORN/ST) £ 9.95
MMS076 CHESS
(ACORN/ST) £ 9.95
MMS077 ANGLEZUP
(ACORN/ST) £ 9.95
MMS078 L TRAP
(ACORN/ST) £ 9.95
MMS079 TAKE OFF
(ACORN/ST) £ 9.95

MMS080 GRAPH CAPERS
(ACORN/ST) £ 9.95
MMS081 MONTE CARLO
(ACORN/ST) £ 9.95
MMS082 SPACE WARP
(ACORN/ST) £ 9.95
MMS083 GOLF
(ACORN/ST) £ 9.95
MMS084 DRAGON QUEST
(ACORN/ST) £ 9.95

MMS085 AIRLIFT
(ACORN/ST) £ 9.95
MMS086 POLARIS
(ACORN/ST) £ 9.95
MMS087 CUBE MASTER
(ACORN/ST) £ 9.95
MMS088 GRAPHS & CHARTS (BOOK)
(ACORN/ST) £ 9.95
MMS089 HOME FINANCE
(ACORN/ST) £ 9.95

MMS090 EARLY LEARNING
(ACORN/ST) £ 9.95
MMS091 THE COMPUTER PROG VOL 1 (BBC)
(BBC) £ 9.95
MMS092 THE COMPUTER PROG VOL 2 (BBC)
(BBC) £ 9.95
MMS093 MUSIC
(ACORN/ST) £ 9.95
MMS094 PAINTING
(ACORN/ST) £ 9.95

MMS095 DRAWING
(ACORN/ST) £ 9.95
MMS096 GAMES OF STRATEGY
(ACORN/ST) £ 9.95
MMS097 FUN GAMES
(ACORN/ST) £ 9.95
MMS098 THE COMPUTER BOOK
(ACORN/ST) £ 9.95
MMS099 SALES LEDGER DISK
(ACORN/ST) £ 9.95

MMS100 PURCHASE LEDGER DISK
(ACORN/ST) £ 9.95
MMS101 FILE IT DISK
(ACORN/ST) £ 9.95
MMS102 MAILING LIST DISK
(ACORN/ST) £ 9.95
MMS103 MISSING SIGNS
(ACORN/ST) £ 9.95
MMS104 SENTENCE SEQUENCING
(ACORN/ST) £ 9.95
MMS105 ROCKET RAID
(ACORN/ST) £ 9.95

MMS106 MONSTERS (ACORN/ST) £11.50
MMS107 SNAPPER (ACORN/ST) £11.50
MMS108 METEORS (ACORN/ST) £11.50
MMS109 INVADERS (ACORN/ST) £11.50
MMS110 PLANETOID (ACORN/ST) £11.50
MMS111 3-D MAZE (ACORN/ST) £11.50
MMS112 BEEB BEEP (ACORN/ST) £11.50
MMS113 SUPER HANGMAN (ACORN/ST) £11.50
MMS114 FLAGS (ACORN/ST) £11.50
MMS115 STRATOBOMBER (ACORN/ST) £11.50
MMS116 FAMILY GAMES (ACORN/ST) £11.50
MMS117 BEEB MUNCH (ACORN/ST) £11.50
MMS118 WOROPRO (ACORN/ST) £11.50
MMS119 POLAR BEAR (ACORN/ST) £11.50
MMS120 DATABASE FOR 16/32K (ACORN/ST) £11.50
MMS121 J.R. (ACORN/ST) £11.50
MMS122 SPACE KINGDOM (ACORN/ST) £11.50
MMS123 CAR WARS/ALIEN PLANET (ACORN/ST) £11.50
MMS124 TIME TRAVELLER (ACORN/ST) £11.50
MMS125 UTILITY PACK 1 (ACORN/ST) £11.50
MMS126 ZOMBIE ISLAND (ACORN/ST) £11.50
MMS127 BEEB TREK (ACORN/ST) £11.50
MMS128 BALACTIC INTRUDER (ACORN/ST) £11.50
MMS129 INHERITANCE (ACORN/ST) £11.50
MMS130 GREAT BRITAIN LTD. (ACORN/ST) £11.50
MMS131 WORLD TRAVEL GAME (ACORN/ST) £11.50

MMS132 PASCAL (CHALK/ST) £ 5.95
MMS133 ANGLE (CHALK/ST) £ 5.95
MMS134 INVISIBLE MAN (CHALK/ST) £ 5.95
MMS135 LETTERS (CHALK/ST) £ 5.95
MMS136 METRICS (CHALK/ST) £ 5.95
MMS137 SEQUENCES (CHALK/ST) £ 5.95
MMS138 CASTLE OF RIDDLES (CHALK/ST) £ 5.95
MMS139 BASIC COMPILER (ACORN/ST) £ 5.95
MMS140 BBC BASIC COMPILER (J. RUSTON) £ 5.95

MMS141 PASCAL (CHALK/ST) £ 5.95
MMS142 ANGLE (CHALK/ST) £ 5.95
MMS143 INVISIBLE MAN (CHALK/ST) £ 5.95
MMS144 LETTERS (CHALK/ST) £ 5.95
MMS145 METRICS (CHALK/ST) £ 5.95
MMS146 SEQUENCES (CHALK/ST) £ 5.95
MMS147 CASTLE OF RIDDLES (CHALK/ST) £ 5.95
MMS148 BASIC COMPILER (ACORN/ST) £ 5.95
MMS149 BBC BASIC COMPILER (J. RUSTON) £ 5.95

MMS150 PASCAL (CHALK/ST) £ 5.95
MMS151 ANGLE (CHALK/ST) £ 5.95
MMS152 INVISIBLE MAN (CHALK/ST) £ 5.95
MMS153 LETTERS (CHALK/ST) £ 5.95
MMS154 METRICS (CHALK/ST) £ 5.95
MMS155 SEQUENCES (CHALK/ST) £ 5.95
MMS156 CASTLE OF RIDDLES (CHALK/ST) £ 5.95
MMS157 BASIC COMPILER (ACORN/ST) £ 5.95
MMS158 BBC BASIC COMPILER (J. RUSTON) £ 5.95

MMS159 PASCAL (CHALK/ST) £ 5.95
MMS160 ANGLE (CHALK/ST) £ 5.95
MMS161 INVISIBLE MAN (CHALK/ST) £ 5.95
MMS162 LETTERS (CHALK/ST) £ 5.95
MMS163 METRICS (CHALK/ST) £ 5.95
MMS164 SEQUENCES (CHALK/ST) £ 5.95
MMS165 CASTLE OF RIDDLES (CHALK/ST) £ 5.95
MMS166 BASIC COMPILER (ACORN/ST) £ 5.95
MMS167 BBC BASIC COMPILER (J. RUSTON) £ 5.95

MMS168 PASCAL (CHALK/ST) £ 5.95
MMS169 ANGLE (CHALK/ST) £ 5.95
MMS170 INVISIBLE MAN (CHALK/ST) £ 5.95
MMS171 LETTERS (CHALK/ST) £ 5.95
MMS172 METRICS (CHALK/ST) £ 5.95
MMS173 SEQUENCES (CHALK/ST) £ 5.95
MMS174 CASTLE OF RIDDLES (CHALK/ST) £ 5.95
MMS175 BASIC COMPILER (ACORN/ST) £ 5.95
MMS176 BBC BASIC COMPILER (J. RUSTON) £ 5.95

MMS177 PASCAL (CHALK/ST) £ 5.95
MMS178 ANGLE (CHALK/ST) £ 5.95
MMS179 INVISIBLE MAN (CHALK/ST) £ 5.95
MMS180 LETTERS (CHALK/ST) £ 5.95
MMS181 METRICS (CHALK/ST) £ 5.95
MMS182 SEQUENCES (CHALK/ST) £ 5.95
MMS183 CASTLE OF RIDDLES (CHALK/ST) £ 5.95
MMS184 BASIC COMPILER (ACORN/ST) £ 5.95
MMS185 BBC BASIC COMPILER (J. RUSTON) £ 5.95

MMS186 PASCAL (CHALK/ST) £ 5.95
MMS187 ANGLE (CHALK/ST) £ 5.95
MMS188 INVISIBLE MAN (CHALK/ST) £ 5.95
MMS189 LETTERS (CHALK/ST) £ 5.95
MMS190 METRICS (CHALK/ST) £ 5.95
MMS191 SEQUENCES (CHALK/ST) £ 5.95
MMS192 CASTLE OF RIDDLES (CHALK/ST) £ 5.95
MMS193 BASIC COMPILER (ACORN/ST) £ 5.95
MMS194 BBC BASIC COMPILER (J. RUSTON) £ 5.95

MMS195 PASCAL (CHALK/ST) £ 5.95
MMS196 ANGLE (CHALK/ST) £ 5.95
MMS197 INVISIBLE MAN (CHALK/ST) £ 5.95
MMS198 LETTERS (CHALK/ST) £ 5.95
MMS199 METRICS (CHALK/ST) £ 5.95
MMS200 SEQUENCES (CHALK/ST) £ 5.95
MMS201 CASTLE OF RIDDLES (CHALK/ST) £ 5.95
MMS202 BASIC COMPILER (ACORN/ST) £ 5.95
MMS203 BBC BASIC COMPILER (J. RUSTON) £ 5.95

MMS204 PASCAL (CHALK/ST) £ 5.95
MMS205 ANGLE (CHALK/ST) £ 5.95
MMS206 INVISIBLE MAN (CHALK/ST) £ 5.95
MMS207 LETTERS (CHALK/ST) £ 5.95
MMS208 METRICS (CHALK/ST) £ 5.95
MMS209 SEQUENCES (CHALK/ST) £ 5.95
MMS210 CASTLE OF RIDDLES (CHALK/ST) £ 5.95
MMS211 BASIC COMPILER (ACORN/ST) £ 5.95
MMS212 BBC BASIC COMPILER (J. RUSTON) £ 5.95

MMS213 PASCAL (CHALK/ST) £ 5.95
MMS214 ANGLE (CHALK/ST) £ 5.95
MMS215 INVISIBLE MAN (CHALK/ST) £ 5.95
MMS216 LETTERS (CHALK/ST) £ 5.95
MMS217 METRICS (CHALK/ST) £ 5.95
MMS218 SEQUENCES (CHALK/ST) £ 5.95
MMS219 CASTLE OF RIDDLES (CHALK/ST) £ 5.95
MMS220 BASIC COMPILER (ACORN/ST) £ 5.95
MMS221 BBC BASIC COMPILER (J. RUSTON) £ 5.95

MMS222 PASCAL (CHALK/ST) £ 5.95
MMS223 ANGLE (CHALK/ST) £ 5.95
MMS224 INVISIBLE MAN (CHALK/ST) £ 5.95
MMS225 LETTERS (CHALK/ST) £ 5.95
MMS226 METRICS (CHALK/ST) £ 5.95
MMS227 SEQUENCES (CHALK/ST) £ 5.95
MMS228 CASTLE OF RIDDLES (CHALK/ST) £ 5.95
MMS229 BASIC COMPILER (ACORN/ST) £ 5.95
MMS230 BBC BASIC COMPILER (J. RUSTON) £ 5.95

MMS231 PASCAL (CHALK/ST) £ 5.95
MMS232 ANGLE (CHALK/ST) £ 5.95
MMS233 INVISIBLE MAN (CHALK/ST) £ 5.95
MMS234 LETTERS (CHALK/ST) £ 5.95
MMS235 METRICS (CHALK/ST) £ 5.95
MMS236 SEQUENCES (CHALK/ST) £ 5.95
MMS237 CASTLE OF RIDDLES (CHALK/ST) £ 5.95
MMS238 BASIC COMPILER (ACORN/ST) £ 5.95
MMS239 BBC BASIC COMPILER (J. RUSTON) £ 5.95

MMS240 PASCAL (CHALK/ST) £ 5.95
MMS241 ANGLE (CHALK/ST) £ 5.95
MMS242 INVISIBLE MAN (CHALK/ST) £ 5.95
MMS243 LETTERS (CHALK/ST) £ 5.95
MMS244 METRICS (CHALK/ST) £ 5.95
MMS245 SEQUENCES (CHALK/ST) £ 5.95
MMS246 CASTLE OF RIDDLES (CHALK/ST) £ 5.95
MMS247 BASIC COMPILER (ACORN/ST) £ 5.95
MMS248 BBC BASIC COMPILER (J. RUSTON) £ 5.95

MMS249 PASCAL (CHALK/ST) £ 5.95
MMS250 ANGLE (CHALK/ST) £ 5.95
MMS251 INVISIBLE MAN (CHALK/ST) £ 5.95
MMS252 LETTERS (CHALK/ST) £ 5.95
MMS253 METRICS (CHALK/ST) £ 5.95
MMS254 SEQUENCES (CHALK/ST) £ 5.95
MMS255 CASTLE OF RIDDLES (CHALK/ST) £ 5.95
MMS256 BASIC COMPILER (ACORN/ST) £ 5.95
MMS257 BBC BASIC COMPILER (J. RUSTON) £ 5.95

MMS258 PASCAL (CHALK/ST) £ 5.95
MMS259 ANGLE (CHALK/ST) £ 5.95
MMS260 INVISIBLE MAN (CHALK/ST) £ 5.95
MMS261 LETTERS (CHALK/ST) £ 5.95
MMS262 METRICS (CHALK/ST) £ 5.95
MMS263 SEQUENCES (CHALK/ST) £ 5.95
MMS264 CASTLE OF RIDDLES (CHALK/ST) £ 5.95
MMS265 BASIC COMPILER (ACORN/ST) £ 5.95
MMS266 BBC BASIC COMPILER (J. RUSTON) £ 5.95

MMS267 PASCAL (CHALK/ST) £ 5.95
MMS268 ANGLE (CHALK/ST) £ 5.95
MMS269 INVISIBLE MAN (CHALK/ST) £ 5.95
MMS270 LETTERS (CHALK/ST) £ 5.95
MMS271 METRICS (CHALK/ST) £ 5.95
MMS272 SEQUENCES (CHALK/ST) £ 5.95
MMS273 CASTLE OF RIDDLES (CHALK/ST) £ 5.95
MMS274 BASIC COMPILER (ACORN/ST) £ 5.95
MMS275 BBC BASIC COMPILER (J. RUSTON) £ 5.95

MMS276 PASCAL (CHALK/ST) £ 5.95
MMS277 ANGLE (CHALK/ST) £ 5.95
MMS278 INVISIBLE MAN (CHALK/ST) £ 5.95
MMS279 LETTERS (CHALK/ST) £ 5.95
MMS280 METRICS (CHALK/ST) £ 5.95
MMS281 SEQUENCES (CHALK/ST) £ 5.95
MMS282 CASTLE OF RIDDLES (CHALK/ST) £ 5.95
MMS283 BASIC COMPILER (ACORN/ST) £ 5.95
MMS284 BBC BASIC COMPILER (J. RUSTON) £ 5.95

MMS285 PASCAL (CHALK/ST) £ 5.95
MMS286 ANGLE (CHALK/ST) £ 5.95
MMS287 INVISIBLE MAN (CHALK/ST) £ 5.95
MMS288 LETTERS (CHALK/ST) £ 5.95
MMS289 METRICS (CHALK/ST) £ 5.95
MMS290 SEQUENCES (CHALK/ST) £ 5.95
MMS291 CASTLE OF RIDDLES (CHALK/ST) £ 5.95
MMS292 BASIC COMPILER (ACORN/ST) £ 5.95
MMS293 BBC BASIC COMPILER (J. RUSTON) £ 5.95

MMS294 PASCAL (CHALK/ST) £ 5.95
MMS295 ANGLE (CHALK/ST) £ 5.95
MMS296 INVISIBLE MAN (CHALK/ST) £ 5.95
MMS297 LETTERS (CHALK/ST) £ 5.95
MMS298 METRICS (CHALK/ST) £ 5.95
MMS299 SEQUENCES (CHALK/ST) £ 5.95
MMS300 CASTLE OF RIDDLES (CHALK/ST) £ 5.95
MMS301 BASIC COMPILER (ACORN/ST) £ 5.95
MMS302 BBC BASIC COMPILER (J. RUSTON) £ 5.95

MMS303 PASCAL (CHALK/ST) £ 5.95
MMS304 ANGLE (CHALK/ST) £ 5.95
MMS305 INVISIBLE MAN (CHALK/ST) £ 5.95
MMS306 LETTERS (CHALK/ST) £ 5.95
MMS307 METRICS (CHALK/ST) £ 5.95
MMS308 SEQUENCES (CHALK/ST) £ 5.95
MMS309 CASTLE OF RIDDLES (CHALK/ST) £ 5.95
MMS310 BASIC COMPILER (ACORN/ST) £ 5.95
MMS311 BBC BASIC COMPILER (J. RUSTON) £ 5.95

MMS312 PASCAL (CHALK/ST) £ 5.95
MMS313 ANGLE (CHALK/ST) £ 5.95
MMS314 INVISIBLE MAN (CHALK/ST) £ 5.95
MMS315 LETTERS (CHALK/ST) £ 5.95
MMS316 METRICS (CHALK/ST) £ 5.95
MMS317 SEQUENCES (CHALK/ST) £ 5.95
MMS318 CASTLE OF RIDDLES (CHALK/ST) £ 5.95
MMS319 BASIC COMPILER (ACORN/ST) £ 5.95
MMS320 BBC BASIC COMPILER (J. RUSTON) £ 5.95

MMS321 PASCAL (CHALK/ST) £ 5.95
MMS322 ANGLE (CHALK/ST) £ 5.95
MMS323 INVISIBLE MAN (CHALK/ST) £ 5.95
MMS324 LETTERS (CHALK/ST) £ 5.95
MMS325 METRICS (CHALK/ST) £ 5.95
MMS326 SEQUENCES (CHALK/ST) £ 5.95
MMS327 CASTLE OF RIDDLES (CHALK/ST) £ 5.95
MMS328 BASIC COMPILER (ACORN/ST) £ 5.95
MMS329 BBC BASIC COMPILER (J. RUSTON) £ 5.95

MMS330 PASCAL (CHALK/ST) £ 5.95
MMS331 ANGLE (CHALK/ST) £ 5.95
MMS332 INVISIBLE MAN (CHALK/ST) £ 5.95
MMS333 LETTERS (CHALK/ST) £ 5.95
MMS334 METRICS (CHALK/ST) £ 5.95
MMS335 SEQUENCES (CHALK/ST) £ 5.95
MMS336 CASTLE OF RIDDLES (CHALK/ST) £ 5.95
MMS337 BASIC COMPILER (ACORN/ST) £ 5.95
MMS338 BBC BASIC COMPILER (J. RUSTON) £ 5.95

MMS339 PASCAL (CHALK/ST) £ 5.95
MMS340 ANGLE (CHALK/ST) £ 5.95
MMS341 INVISIBLE MAN (CHALK/ST) £ 5.95
MMS342 LETTERS (CHALK/ST) £ 5.95
MMS343 METRICS (CHALK/ST) £ 5.95
MMS344 SEQUENCES (CHALK/ST) £ 5.95
MMS345 CASTLE OF RIDDLES (CHALK/ST) £ 5.95
MMS346 BASIC COMPILER (ACORN/ST) £ 5.95
MMS347 BBC BASIC COMPILER (J. RUSTON) £ 5.95

MMS348 PASCAL (CHALK/ST) £ 5.95
MMS349 ANGLE (CHALK/ST) £ 5.95
MMS350 INVISIBLE MAN (CHALK/ST) £ 5.95
MMS351 LETTERS (CHALK/ST) £ 5.95
MMS352 METRICS (CHALK/ST) £ 5.95
MMS353 SEQUENCES (CHALK/ST) £ 5.95
MMS354 CASTLE OF RIDDLES (CHALK/ST) £ 5.95
MMS355 BASIC COMPILER (ACORN/ST) £ 5.95
MMS356 BBC BASIC COMPILER (J. RUSTON) £ 5.95

MMS357 PASCAL (CHALK/ST) £ 5.95
MMS358 ANGLE (CHALK/ST) £ 5.95
MMS359 INVISIBLE MAN (CHALK/ST) £ 5.95
MMS360 LETTERS (CHALK/ST) £ 5.95
MMS361 METRICS (CHALK/ST) £ 5.95
MMS362 SEQUENCES (CHALK/ST) £ 5.95
MMS363 CASTLE OF RIDDLES (CHALK/ST) £ 5.95
MMS364 BASIC COMPILER (ACORN/ST) £ 5.95
MMS365 BBC BASIC COMPILER (J. RUSTON) £ 5.95

MMS366 PASCAL (CHALK/ST) £ 5.95
MMS367 ANGLE (CHALK/ST) £ 5.95
MMS368 INVISIBLE MAN (CHALK/ST) £ 5.95
MMS369 LETTERS (CHALK/ST) £ 5.95
MMS370 METRICS (CHALK/ST) £ 5.95
MMS371 SEQUENCES (CHALK/ST) £ 5.95
MMS372 CASTLE OF RIDDLES (CHALK/ST) £ 5.95
MMS373 BASIC COMPILER (ACORN/ST) £ 5.95
MMS374 BBC BASIC COMPILER (J. RUSTON) £ 5.95

MMS375 PASCAL (CHALK/ST) £ 5.95
MMS376 ANGLE (CHALK/ST) £ 5.95
MMS377 INVISIBLE MAN (CHALK/ST) £ 5.95
MMS378 LETTERS (CHALK/ST) £ 5.95
MMS379 METRICS (CHALK/ST) £ 5.95
MMS380 SEQUENCES (CHALK/ST) £ 5.95
MMS381 CASTLE OF RIDDLES (CHALK/ST) £ 5.95
MMS382 BASIC COMPILER (ACORN/ST) £ 5.95
MMS383 BBC BASIC COMPILER (J. RUSTON) £ 5.95

MMS384 PASCAL (CHALK/ST) £ 5.95
MMS385 ANGLE (CHALK/ST) £ 5.95
MMS386 INVISIBLE MAN (CHALK/ST) £ 5.95
MMS387 LETTERS (CHALK/ST) £ 5.95
MMS388 METRICS (CHALK/ST) £ 5.95
MMS389 SEQUENCES (CHALK/ST) £ 5.95
MMS390 CASTLE OF RIDDLES (CHALK/ST) £ 5.95
MMS391 BASIC COMPILER (ACORN/ST) £ 5.95
MMS392 BBC BASIC COMPILER (J. RUSTON) £ 5.95

MMS393 PASCAL (CHALK/ST) £ 5.95
MMS394 ANGLE (CHALK/ST) £ 5.95
MMS395 INVISIBLE MAN (CHALK/ST) £ 5.95
MMS396 LETTERS (CHALK/ST) £ 5.95
MMS397 METRICS (CHALK/ST) £ 5.95
MMS398 SEQUENCES (CHALK/ST) £ 5.95
MMS399 CASTLE OF RIDDLES (CHALK/ST) £ 5.95
MMS400 BASIC COMPILER (ACORN/ST) £ 5.95
MMS401 BBC BASIC COMPILER (J. RUSTON) £ 5.95

MMS402 PASCAL (CHALK/ST) £ 5.95
MMS403 ANGLE (CHALK/ST) £ 5.95
MMS404 INVISIBLE MAN (CHALK/ST) £ 5.95
MMS405 LETTERS (CHALK/ST) £ 5.95
MMS406 METRICS (CHALK/ST) £ 5.95
MMS407 SEQUENCES (CHALK/ST) £ 5.95
MMS408 CASTLE OF RIDDLES (CHALK/ST) £ 5.95
MMS409 BASIC COMPILER (ACORN/ST) £ 5.95
MMS410 BBC BASIC COMPILER (J. RUSTON) £ 5.95

MMS411 PASCAL (CHALK/ST) £ 5.95
MMS412 ANGLE (CHALK/ST) £ 5.95
MMS413 INVISIBLE MAN (CHALK/ST) £ 5.95
MMS414 LETTERS (CHALK/ST) £ 5.95
MMS415 METRICS (CHALK/ST) £ 5.95
MMS416 SEQUENCES (CHALK/ST) £ 5.95
MMS417 CASTLE OF RIDDLES (CHALK/ST) £ 5.95
MMS418 BASIC COMPILER (ACORN/ST) £ 5.95
MMS419 BBC BASIC COMPILER (J. RUSTON) £ 5.95

MMS420 PASCAL (CHALK/ST) £ 5.95
MMS421 ANGLE (CHALK/ST) £ 5.95
MMS422 INVISIBLE MAN (CHALK/ST) £ 5.95
MMS423 LETTERS (CHALK/ST) £ 5.95
MMS424 METRICS (CHALK/ST) £ 5.95
MMS425 SEQUENCES (CHALK/ST) £ 5.95
MMS426 CASTLE OF RIDDLES (CHALK/ST) £ 5.95
MMS427 BASIC COMPILER (ACORN/ST) £ 5.95
MMS428 BBC BASIC COMPILER (J. RUSTON) £ 5.95

MMS429 PASCAL (CHALK/ST) £ 5.95
MMS430 ANGLE (CHALK/ST) £ 5.95
MMS431 INVISIBLE MAN (CHALK/ST) £ 5.95
MMS432 LETTERS (CHALK/ST) £ 5.95
MMS433 METRICS (CHALK/ST) £ 5.95
MMS434 SEQUENCES (CHALK/ST) £ 5.95
MMS435 CASTLE OF RIDDLES (CHALK/ST) £ 5.95
MMS436 BASIC COMPILER (ACORN/ST) £ 5.95
MMS437 BBC BASIC COMPILER (J. RUSTON) £ 5.95

MMS438 PASCAL (CHALK/ST) £ 5.95
MMS439 ANGLE (CHALK/ST) £ 5.95
MMS440 INVISIBLE MAN (CHALK/ST) £ 5.95
MMS441 LETTERS (CHALK/ST) £ 5.95
MMS442 METRICS (CHALK/ST) £ 5.95
MMS443 SEQUENCES (CHALK/ST) £ 5.95
MMS444 CASTLE OF RIDDLES (CHALK/ST) £ 5.95
MMS445 BASIC COMPILER (ACORN/ST) £ 5.95
MMS446 BBC BASIC COMPILER (J. RUSTON) £ 5.95

MMS447 PASCAL (CHALK/ST) £ 5.95
MMS448 ANGLE (CHALK/ST) £ 5.95
MMS449 INVISIBLE MAN (CHALK/ST) £ 5.95
MMS450 LETTERS (CHALK/ST) £ 5.95
MMS451 METRICS (CHALK/ST) £ 5.95
MMS452 SEQUENCES (CHALK/ST) £ 5.95
MMS453 CASTLE OF RIDDLES (CHALK/ST) £ 5.95
MMS454 BASIC COMPILER (ACORN/ST) £ 5.95
MMS455 BBC BASIC COMPILER (J. RUSTON) £ 5.95

MMS456 PASCAL (CHALK/ST) £ 5.95
MMS457 ANGLE (CHALK/ST) £ 5.95
MMS458 INVISIBLE MAN (CHALK/ST) £ 5.95
MMS459 LETTERS (CHALK/ST) £ 5.95
MMS460 METRICS (CHALK/ST) £ 5.95
MMS461 SEQUENCES (CHALK/ST) £ 5.95
MMS462 CASTLE OF RIDDLES (CHALK/ST) £ 5.95
MMS463 BASIC COMPILER (ACORN/ST) £ 5.95
MMS464 BBC BASIC COMPILER (J. RUSTON) £ 5.95

MMS465 PASCAL (CHALK/ST) £ 5.95
MMS466 ANGLE (CHALK/ST) £ 5.95
MMS467 INVISIBLE MAN (CHALK/ST) £ 5.95
MMS468 LETTERS (CHALK/ST) £ 5.95
MMS469 METRICS (CHALK/ST) £ 5.95
MMS470 SEQUENCES (CHALK/ST) £ 5.95
MMS471 CASTLE OF RIDDLES (CHALK/ST) £ 5.95
MMS472 BASIC COMPILER (ACORN/ST) £ 5.95
MMS473 BBC BASIC COMPILER (J. RUSTON) £ 5.95

MMS474 PASCAL (CHALK/ST) £ 5.95
MMS475 ANGLE (CHALK/ST) £ 5.95
MMS476 INVISIBLE MAN (CHALK/ST) £ 5.95
MMS477 LETTERS (CHALK/ST) £ 5.95
MMS478 METRICS (CHALK/ST) £ 5.95
MMS479 SEQUENCES (CHALK/ST) £ 5.95
MMS480 CASTLE OF RIDDLES (CHALK/ST) £ 5.95
MMS481 BASIC COMPILER (ACORN/ST) £ 5.95
MMS482 BBC BASIC COMPILER (J. RUSTON) £ 5.95

MMS483 PASCAL (CHALK/ST) £ 5.95
MMS484 ANGLE (CHALK/ST) £ 5.95
MMS485 INVISIBLE MAN (CHALK/ST) £ 5.95
MMS486 LETTERS (CHALK/ST) £ 5.95
MMS487 METRICS (CHALK/ST) £ 5.95
MMS488 SEQUENCES (CHALK/ST) £ 5.95
MMS489 CASTLE OF RIDDLES (CHALK/ST) £ 5.95
MMS490 BASIC COMPILER (ACORN/ST) £ 5.95
MMS491 BBC BASIC COMPILER (J. RUSTON) £ 5.95

MMS492 PASCAL (CHALK/ST) £ 5.95
MMS493 ANGLE (CHALK/ST) £ 5.95
MMS494 INVISIBLE MAN (CHALK/ST) £ 5.95
MMS495 LETTERS (CHALK/ST) £ 5.95
MMS496 METRICS (CHALK/ST) £ 5.95
MMS497 SEQUENCES (CHALK/ST) £ 5.95
MMS49

C.J.E. Microcomputers

BBC
Specialists

VAT Included where applicable

Quality Disk Drives

Single drive	40 track single sided 1 x 100k	£210.00
Dual drive	40 track single sided 2 x 100k	£350.00
Dual drive	40 track double sided 2 x 200k	£546.25
Dual drive	80 track double sided 2 x 400k	£799.25

All drives are cased with own PSU for reliability, and include connecting cables and utilities disk. Delivery £4.00

Software for the BBC Micro

MISSILE CONTROL the first implementation on the BBC Micro of the popular arcade game. (32K)	£9.00
MAZE MAN an authentic version of the popular arcade game. (32K)	£6.00
BALLOONS a highly original game that soon becomes compulsive playing. (32K)	£6.00
DISSASSEMBLER the memory dump routine includes a scrolling back in memory facility. (16K)	£5.00

MISSILE CONTROL, MAZE MAN and BALLOONS use the Keyboard or Joysticks for control

30+ Programs for the BBC Microcomputer

This Book contains program listings, with explanations and tips on using the BBC Micro

GAMES UTILITIES GRAPHICS and MUSIC

Most programs will run on Model's A and B

Edited by C. J. Evans, various Authors.

A pair of cassettes with all the programs is available.

BOOK	£5.00
BOOK and CASSETTE SET	£9.00

LEADS

The BBC Micro comes without a cassette lead

7Pin Din to 2 x 3.5mm and 1 x 2.5mm minijacks £4.00

7Pin Din to 5Pin Din and 2.5mm minijack £4.00

7Pin Din to 7Pin Din £4.00

7Pin Din PLUGS Two for £0.65

6Pin Din PLUGS (for RGB socket) Two for £0.65

5Pin Din PLUGS (360° for RS232) Two for £0.65

RS423 TO RS423 (BBC Micro to BBC Micro)

Two metre cable £4.00 Four metre cable £5.00

TELEVISION/MONITOR LEADS full range available

Phono plug to Co-ax with high quality cable 3 Metres £3.00

BNC Plug to BNC Plug £3.10

BNC Plug to Phone plug

(i.e. BBC Micro to Rediffusion TVRM) £2.20

RGB 6PIN DIN to 6PIN DIN 1 metre £4.00 2 metre £5.00

PRINTER CABLES

BBC to 36 way Centronics Type connector £17.50

BBC to 25 way D Type (For use with RS232) £ 9.50

BBC to 40 way edge connector (Centronics 739) £20.00

TORCH to 36 way Centronics Type connector £20.00

Blank C30 Computer Cassettes

Ten for £4.50

15 Way D Type Plug with Cover £2.75

Computer graphics design pads 100 sheets £4.00

BBC Upgrade Kits

RAM UPGRADE (100ns) £23.00

KIT A Printer and I/O Port £ 9.50

KIT B Analogue Port £ 8.00

KIT C Serial I/O and RGB £10.00

KIT D Expansion Bus/Tube £ 8.00

Full Upgrade kit £60.00

All components full specification

STAR DP8480 PRINTER From £250.00 Inc VAT

80 CPS : 80/96/132 COLS

BIDIRECTIONAL LOGIC SEEKING

TRACTOR WITH FRICTION FEED

CENTRONICS £217.39 + £32.61 VAT = £250.00

RS232 £235.00 + £35.25 VAT = £270.25

High Res Graphics option to allow BBC Screen dumps £15.00/£20.00

(24HR SECURICOR DELIVERY FOR PRINTERS £8.00)

VAT Included where applicable

Send SAE for full Price List of our large range of accessories.

C.J.E. POSTAGE Add 50p per order or as stated
Dept (AU), 25 HENRY AVE, RUSTINGTON,
W.SUSSEX, BN16 2PA (09062) 6647
Microcomputers

BBC

Micro

SYNTHESIZER

Model A or B

Setting up and editing of envelopes and sound channels made easy using this utility programme.

Up to 36 envelopes can be defined and played instantly using piano like keyboard and secondary keyboard.


Facilities include storing envelope values on tape, synchronizing of sound channels and ability to play chords.

Full instructions supplied
Price £8.95 including p&p
plus one FREE programme.


The BUS Company
16 Colwill Walk Mainstone
Plymouth Tel: (0752) 781037

BUSCO

BBC USER SOFTWARE



adding the finishing touch
to your BBC computer . . .
the OWL PERCH®

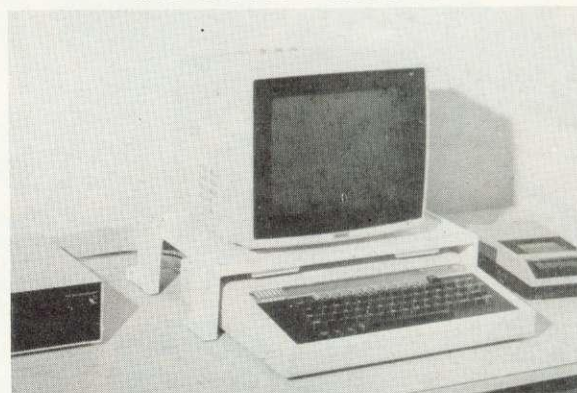

The 'Owl Perch' Stand is a heavy duty, sand-cast aluminium alloy support designed to enable a monitor or television set to be placed above the B.B.C. Computer. It prevents damage to the plastic case of the computer and allows the VDU screen to be positioned at a comfortable viewing angle. The 'Owl Perch' may be earthed to provide screening for the computer.

The top surface of the stand is recessed to prevent the monitor sliding off the stand and prevent liquids or small objects falling on to the computer. It is finished in an attractive cream coloured epoxy enamel and is fitted with rubber feet to prevent damage to table or desk tops. The 'Owl Perch' VDU Stand provides ample clearance to prevent overheating. The price quoted is for the Standard single tier unit but various extras are available including a second tier kit to provide an additional shelf for mounting disc drive, etc., below the VDU.

leaflet available £35 incl VAT & p&p (UK)
please allow up to 28 days for delivery

WILLIAM BROADY & SON LIMITED (Dept A)
ENGLISH ST., HULL. HU3 2DU (est. 1902)

► page 67

similar to Basic's PEEK instruction using BCPL words rather than bytes. Similarly !4 := B will put B in the fourth word in store. BBC micro and Acorn Atom users will recognise the similarity with '?' used for PEEK and POKE on their machines.

BCPL programs may use this feature to build up complex data structures, with BCPL variables holding addresses pointing to different parts of the structure. A common use is to build vectors, BCPL's equivalent of arrays. V := GETVEC(5) will assign six consecutive words of store and V is given the address of the first one. Thus, !V will give the contents of the zero element of the vector, !(V + 1) may give the contents of the first element and so on. For convenience !(V + 1) may be written as V!1 or !V. The six elements of the array may be accessed by: V!0, V!1, V!2, V!3, V!4 and V!5.

Vectors like this are also used for strings in BCPL (the first byte of the zero element holding the number of characters in the string). Thus:

```
B := "A string"
```

sets up a five element vector as in figure 1.

B!2 will give a word holding the characters 't' and 'r'. Clearly we want to be able to get at the characters, and the byte indirection operator, %, does this. Thus B%3 gives the third character (or byte) in the string ('s' here). B%0 gives the length of the string. This facility gives unlimited power to perform any string manipulation.

Finally, a very distinctive feature of BCL is its rich variety of control statements. First there are the conditionals, IF and TEST. The IF statement has the form IF <condition> THEN <block to execute> and the TEST statement has the form TEST<condition> THEN <block to execute> ELSE <block to execute>.

The reason for having two statements, rather than just an IF statement with an optional else, is illustrated by the following fragment of Basic:

```
10 INPUT B
20 IF B > 99 THEN IF B < 1000
  THEN PRINT "Hundreds" ELSE
  PRINT "Thousands"
```

It is not clear which IF the ELSE

belongs to. Presumably it belongs to the second, because if it belongs to the first, entering 10 will cause "Thousands" to be printed, presumably not what was intended. This is called the 'Dangling ELSE problem' and by having two different statements BCPL avoids it, since a TEST must have an ELSE, while an IF may not. The above code would be written:

```
IF B > 99
  THEN
    TEST B < 1000
    THEN
      WRITES("Hundreds")
    ELSE
      WRITES("Thousands")
```

and the meaning is clear.

The above example also illustrates BCPL's flexible layout. Spaces and new lines are always ignored, so long as they don't produce an ambiguous program, except where they appear in strings. They may be used freely to lay the program out clearly. In addition, BCPL has FOR-NEXT loops, and REPEATUNTIL and REPEATWHILE instructions, with the condition tested at the beginning or end of the loop. It becomes extremely easy to produce very structured programs

without using a single GOTO statement (although BCPL does provide them if you must use them). This in turn facilitates debugging, making BCPL programs very efficient in terms of programmer effort.

This is only a brief description of the flavour of BCPL. What then are the advantages for micros? The main one is its size. The language is small enough for a full compiler to be fitted on an eight-bit machine. In addition, it can be compiled in small sections. By dynamically linking in sections as they are needed, programs which in total are bigger than the machine's main store may be run.

Since the code may be compiled into machine code, the programs run about two orders of magnitude faster than the fastest interpretive language, such as most Basic and Lisp implementations on micros.

The clarity and structure in BCPL is of great value when compared with other compiled languages. Forth, the only major contender as a compiled language is harder to understand.

However, BCPL is not perfect. A major problem for micros is that

```
1 //The seive of Erastothenes
2 GET "LIBHDR"
3
4 MANIFEST
5 $(
6   highest = 5000
7 $)
8
9 LET START () BE
10 $(
11   LET prime = VEC highest
12   LET divisor = 2
13   FOR i = 2 TO highest
14   DO
15     prime!i := TRUE //Initially assume prime
16   prime!0 := FALSE //Zero not prime
17   prime!1 := FALSE //One not prime
18   UNTIL divisor * divisor > highest
19   DO
20     $(
21       LET nextcross = divisor * divisor
22       UNTIL nextcross > highest
23       DO
24         $(
25           prime!nextcross := FALSE //Delete
26           nextcross := nextcross + divisor
27         $)
28       divisor := divisor + 1 //Select next divisor
29       REPEATUNTIL prime!divisor //Must be TRUE for prime
30     $)
31   WRITEF ("*PPrimes up to %N*N*N",highest) //Header
32   FOR i = 0 TO 5000
33   DO
34     IF prime!i //TRUE => i is prime
35     THEN
36       WRITED (i,8)
37 $)
```

Program 1. The seive of Erastothenes



while the compiled code is of a high standard, it often takes up a lot of room compared with hand-written machine code. A solution recently made available is to compile to a compact intermediate

A full compiler can be fitted on an eight-bit micro

code, Cintcode, which can be efficiently interpreted. This typically occupies only about one third of the room of identical compiled code at the expense of running at one third the speed. This is the system used by the BBC micro implementation.

Other disadvantages of BCPL are more inherent in the language. The facilities for treating BCPL words as real numbers are invariably poor and slow, and for complex scientific calculations interpreted Basic is certainly as fast, and better equipped. In addition, the compiled code, while good, cannot be fully optimised. Those requiring a further increase in speed will have to use machine code or a language such as Fortran (although on 8-bit micros you won't find optimising compilers yet).

The example program calculates prime integers up to 5000. The method used is the Sieve of Eratosthenes, a technique invented by a Greek called Eudoxus (just to confuse matters). All the integer numbers from two to 5000 are written down. Then all multiples of two are struck out, followed by multiples of three, five and so on for all primes up to the square root of 5000. All integers which have not been struck out must now be prime. The method is efficient for large numbers of prime integers, although it requires a large amount of memory, particularly with the simple implementation given here.

BCPL does not distinguish between upper and lower case, and so for clarity lower case is used for all variable names, labels etc.

Comments are introduced by a double slash, as in line 1. Everything from // to the end of the line is ignored by the compiler.

The GET directive of line 2 inserts the text file LIBHDR which

contains declarations of all the standard headers.

The MANIFEST declaration in line 4 is used to declare highest as a constant equivalent to 5000. Wherever it occurs in the program, 5000 will be substituted. This makes for clarity, and also means that if I want to generate integer primes up to 10,000 I can just alter this one declaration.

The procedure START is declared in line 9. BCPL commences execution of a program by entering the procedure called START. The body of a procedure is a block, and a block is delimited by section brackets, \$(and \$). The section brackets for the body of START are in lines 10 and 37. Note the use of indenting to clarify the position of blocks.

Prime is declared as a vector of 5000 elements. Divisor is declared as a variable, with initial value 2; this is the first prime integer for which multiples will be struck out.

The FOR loop of line 13 is used

Basic is better equipped for complex calculations

to set all elements of prime to TRUE. When a number is struck out its element will be set to FALSE. Elements 0 and 1 are set to false so they won't be printed out as prime. Line 18 has an UNTIL loop, the following block is executed until the condition is met, ie the divisor to be struck out exceeds the square root of 5000. Inside, the loop nextcross is declared as the next number to strike out. It is set to divisor * divisor since all lower multiples of divisor will have been struck out by previous passes.

The second UNTIL loop strikes out all multiples of divisor. This is followed in lines 28 and 29 by a REPEATUNTIL loop. This is like the UNTIL loop, except the condition is tested at the end. The block to be executed consists of the single statement, divisor := divisor + 1, to increment the divisor until it reaches the next prime integer. Being a single statement, it need not be surrounded by section brackets.

Then follows a header for the

output, using the formatted output routine, WRITEF. A '*' in the output string introduces an escape character. Here *P means form-feed (ie clear the console screen) and *N means new line, so the heading will be followed by a blank line. The % introduces a formatted item. %N means insert a decimal number from the next argument (highest).

Finally, the primes are printed out using WRITED. If i is prime then prime!i will be TRUE! and WRITED (i,8) will print i out in a field of eight characters, neatly fitting five numbers on a 40-character line.

This program when run on a BBC micro (which in fact requires one more line of program to declare the amount of stack required) takes 11.3 seconds, compared with 37.7 seconds for an equivalent Basic program.

For further information on BCPL the best currently available book is *BCPL, the language and its compiler*, by Martin Richards and Colin Whitby-Stevens, published by Cambridge University Press. For further information on co-routines, the only literature I know of is the original paper by Ken Moody and Martin Richards.

BCPL systems are available for most machines running CP/M, as well as some others. Details of Cintcode implementations may be obtained from Richards Computer Products Ltd, Brookside, Westbrook Street, Blewbury, Didcot, Oxfordshire OX11 9QA. Details of the implementation for the BBC microcomputer may be obtained from Acornsoft, 4A Market Hill, Cambridge CB2, 1NJ.

Those interested in numerical applications of BCPL may be interested in a book by R.J. Macmillan, to be published shortly by Acornsoft. This describes a set

BCPL does not distinguish between upper and lower case

of routines for performing multiple precision integer arithmetic. Programs are given in both BBC Basic and BCPL, but the superior speed of BCPL allows far larger numbers to be manipulated.

FINANCIAL GAMES

BBC Model B

THE WORLD TRAVEL GAME



**1 or 2 Players,
Choice of Game,
'Exciting, Tense, Competitive and
even Educational'**



★ ★ ★ ★ ★

Travel the World; Journey by air, rail and road.
Exchange currencies; Buy souvenirs; Book tickets.
Cope with hijacks, strikes, robbery and other problems
inherent with travel.

Visit countries as diverse as Russia & the Falklands.

Your aim is to collect 6 souvenirs and return to
LONDON intact!

— £6.95 —

GREAT BRITAIN LTD.




**You are P.M.
and Chancellor of
'Great Britain'**

You must select the Party you wish to represent and your aim is to stay in office for as long as possible. You must control inflation and unemployment, maintain the exchange rate, introduce social reforms and stay popular. The game is split into sectors: country profile, shopping basket, budget day, reform opportunities, manifesto, and most important election nights (a telling time).

**A COMPLEX GAME THAT YOU WILL NOT TIRE
OF IN A HURRY**

— £5.95 —



INHERITANCE

**Gt. Uncle Arburthnot
is dead.
You stand to inherit!!**

A 2 part game. Prove your financial accumen in Part 1 by investing wisely at the stock and metal markets; if desperate try the casino or the horse races. If you are successful you will enter the world of big business in Part 2. Find the secret formula for paradise cola; manufacture and market the drink; cope with strikes, fires, frauds, cash shortages, etc. Your ultimate aim is to become a millionaire! **A MAMMOTH GAME PACKED FULL OF FEATURES**

— £5.95 —

See Reviews in:

Acorn User Dec '82 — Personal Computer Jan '83

Trade Enquiries Welcome. Special Deals for Schools.

Simon W. Hessel (Dept A)

15 Lytham Court, Cardwell Crescent, Sunninghill, Berks.

Telephone: Ascot 25179

24HR DESPATCH — ONE YEAR GUARANTEE — MONEY-BACK IF NOT SATISFIED

HAVE YOU GOT A BBC MICRO? THEN YOU NEED:



THE NEWSLETTER OF THE INDEPENDENT NATIONAL BBC MICROCOMPUTER USERS GROUP

IN RECENT MAGAZINES:

Articles: Teletext Graphics, User Definable Characters, User Definable Keys, Sounds, *FX, Telesoftware, Line Structure and Merging, Epson Screen Dump, Pixel Power, Moving Things, Manual Review, What Printer? Seikosha Dump, Machine Code, How To Get More Colours Out Of Your BBC Micro, Circles Galore, Conversions for RGB Inputs, How To Use Joysticks, Instant Graphics, Software Protection, String, String, String, What Monitor? Speeding Up Your Programs, Computer Conversions, Questionnaire Results, Formatting, Assembler Programming On The BBC Micro, Errors? Focus On Adventure, Diskspot and lots, lots more

Programs: Labyrinth (Game), Pontoon (Game), Artillery (Game), Life (Misc.), Calendar (Misc.), Prism (Educ.), Spiral Patterns (Graphics), Bazooka (Game), 4-In-A-Row (Game), Mortgage (Misc.), Oxygen (Game), Teletext Terminal (Utility), Wordprocessor (Business), Mixer (Graphics), How Many Colours? (Graphics), Disassembler (Utility), Maths Race (Educ.), Puzzle Program (Game), TV Test Signal Generator (Utility), Alphabet Tester (Educ.), Repeat (Game), Memory Analyser (Utility) and lots, lots more

Regular Features: Bookreview, Letters, Hardspot, Softreview (we review at least 8 programs per magazine from all sources), Oddspot (a different graphical program every month), Meeting Place (where we list local user groups), Contacts (spans over 1 page of names and addresses of people who want to get in touch with other users in their area), Competitions, Printerview (we have looked at the Seikosha and Amber 2400 and give full details on how to use them with screen dump programs), Seasons (a seasonal program every month), Queryspot, Special Offers (special offers and exclusive club discounts) and lots, lots more

WE HAVE THE BEST WRITERS FOR THE BBC MICRO INCLUDING UNKNOWNNS AND THE POPULAR WRITERS LIKE JEREMY RUSTON

WE WON'T TRY TO PUSH LASERBUG ON YOU LIKE THE OTHERS – SEND OFF FOR A SAMPLE COPY AND YOU'LL FIND THAT LASERBUG SELLS ITSELF

ILABLE . . . BBC DUST COVERS AVAILABLE . . . BBC DUST COVERS AVAILABLE . . . BBC DUST COV

Specially made LASERBUG Dust Covers available for only £3.25 inclusive. Made of high quality polyester/cotton which is better than the less attractive PVC ones. Anti-static and in a complimentary colour. Use the form at the bottom to order.

ERS AVAILABLE . . . BBC DUST COVERS AVAILABLE . . . BBC DUST COVERS AVAILABLE . . . BBC

Please supply me with: A sample copy of LASERBUG @ £1.00
A 12 Month subscription to LASERBUG @ £12.00 for 12 issues of the magazine
A 6 Month subscription to LASERBUG @ £6.00 for 6 issues of the magazine
An overseas subscription to LASERBUG @ £14.00 (Surface Mail – write for details of air mail)
..... LASERBUG Dust Cover(s) @ £3.25 each

I enclose a cheque/PO for £ made payable to LASERBUG

NAME ADDRESS

Please send the completed form to: LASERBUG Dept. AU, 10 Dawley Ride, Colnbrook, Slough, Berks., SL3 0QH.

THE BEST TYPE RIGHT?

'It is obviously a blessing to mankind and especially to womanhood'

Thus spoke Christopher Latham Scholes, the American printer who around 1867 perfected a machine which could type faster than the human hand could write – something engineers and designers had been striving to achieve for 150 years.

Scholes's words, sexist as they were, were also prophetic. Even more than the outbreak of war, the new profession 'typewriter operator' paved the way for generations of women to enter business.

My complaint about Scholes is

**How do you fancy
£20-worth of Acornsoft's
amazing wares? Simon
Dally is offering just that
in our free competition.**

**First, he considers
the state of
Q W E R T Y**

that his machine was specifically designed to allow words to be written quickly – but not so quickly that the mechanical keys of the machine became jammed.

Just as many criticize CP/M as being backward, complicated, or not 'state of the art', so the layout of the typewriter in the 1980s is inefficient and illogical. I refer to the infamous QWERTY layout.

On a piano keyboard (which has a far less flexible layout than a typewriter) a reasonable player has little trouble in producing 1500 – 2000 keystrokes a minute. The equivalent to this, on a typewriter, would be 300 – 400 words. In practice, the world's fastest typists barely manage 180 – 200 wpm.

Many attempts have been made to improve on the design Scholes

page 79►

DECEMBER'S RESULTS

THE December competition was a tough one – and the response was just under a hundred entries, only about half correct.

Despite careful checking and dire threats from the Editor about there being 'no room in *Acorn User* for lame-duck puzzle editors . . .' question 2 and 8 were susceptible to interpretation because we hadn't specified different digits.

I was then clever enough to break my leg while engaged in a game of poker (no need for details here). 'Quack! Quack!' read the telegram to St Richard's Hospital, Chichester where I spent Christmas recovering with *The Puzzle Mountain* by Gyles Brandreth (Penguin, £4.95). Both hospital and book are warmly recommended.

The correct answers are:

- 1) 20,64
- 2) 46,96 (but also 99 x 99 was accepted)
- 3) 840
- 4) Several solutions, equally valid. Two goats, one sheep and 261 piglets was a popular answer. 'Sheep are cheaper up north', wrote one reader
- 5) 6, 999, 999, 556 or 2, 909, 199, 969
- 6) 8, 12, 14, 17, 18, 19, 20, 21, 22, 23, 25, 26, 27, 29, 30, 31, 33, 35, 37, 39, 41, 43, 45, 47, 49 (total = 711)
- 7) 496
- 8) 1089 (mean-minded readers who gave trivial answers like 11 or 99 were allowed)
- 9) 6788
- 10) 3 – 39,364 6 – 6, 377, 290
4 – 472, 390 7 – 7, 440, 172
5 – 590, 488 8 – 8, 503, 054
9 – 9, 565, 936

The winner was Derek Chown from Dorset, to whom £50 worth of Acornsoft's addictive wares have been sent.

For the best hardware, the best software.

The BBC Microcomputer system is generally regarded to be the best micro in its price range you can lay your hands on. So, if you're thinking of buying one or already own one, you'll want to know about the software that's been specially designed for it.

Not surprisingly, it's made by Acornsoft, the software division of Acorn Computers Ltd., who designed and built the BBC Microcomputer. So naturally you can expect the highest quality software with the built-in ingenuity to fully exploit the BBC Micro's potential.

Further education for everyone.



Creative Graphics, which includes the book 'Creative Graphics on the BBC Microcomputer' (price £17.45), provides 36 programs on cassette producing a spectacular range of pictures and patterns in full colour, including animated pictures, recursively-defined curves and three dimensional shapes.

Word Sequencing (price £11.90) contains three word sequencing programs on cassette. Each program presents a series of jumbled words which must be arranged on screen to form

either a proverb, nursery rhyme title or a sensible sentence.

Learn more languages.

LISP (price £24.35) is the fundamental language of artificial intelligence research.

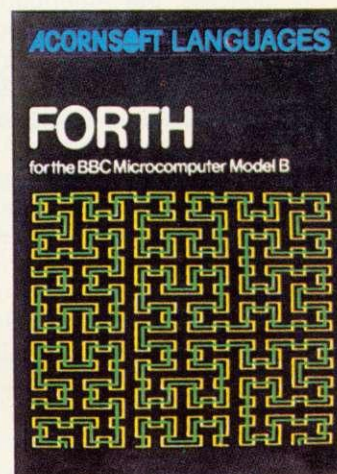
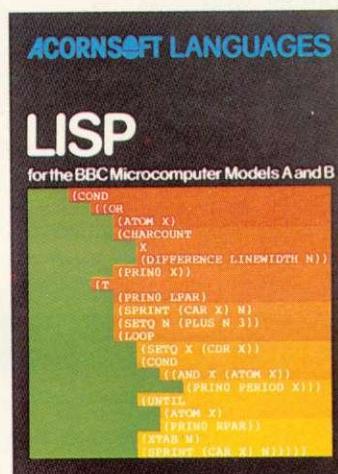





It consists of 5.5K of machine code interpreter, plus 3K of initialised LISP work-space containing utilities and constants. It comes complete with a book that introduces you to programming in LISP, as well as some fascinating applications.

FORTH (price £24.35) is a complete implementation of the FORTH language to the 1979 standard specification for the BBC Microcomputer Model B. This much acclaimed programming language is also accompanied by a specially written book explaining all you need to know.

Mind-boggling games.

Philosopher's Quest (price £9.95) is an advanced adventure in which you tell the computer what you want to do and it

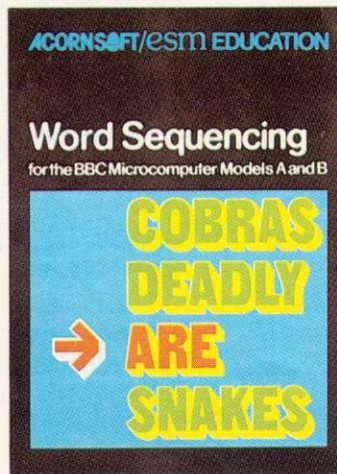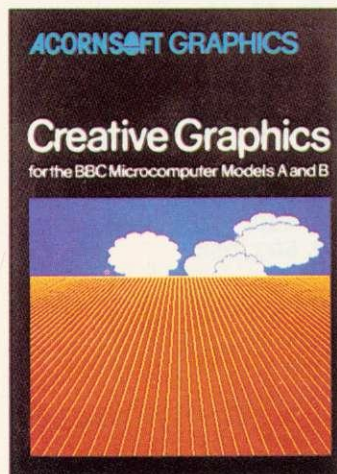

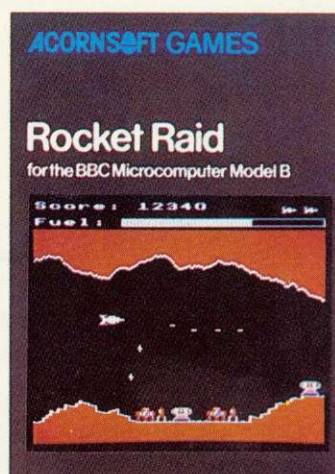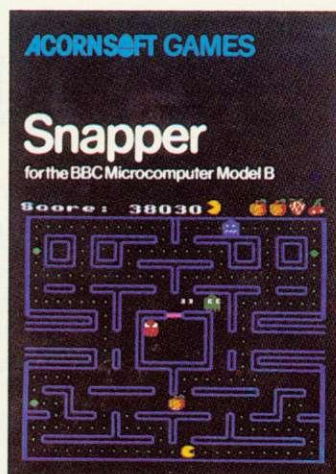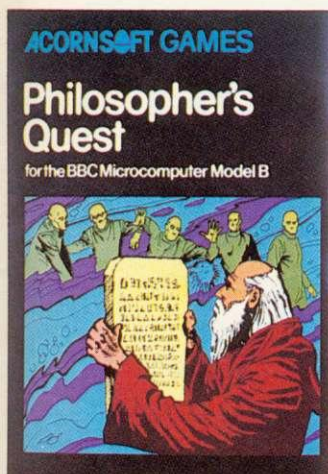

more by sending for our free catalogue.

How to get Acornsoft programs.

If you're a credit card holder and would like to buy cassettes of the programs shown in this advertisement, or if you would like to know the address of

describes back in plain English your progress through a fascinating world of fiendish puzzles to be solved.

Snapper (price £9.95) is a colourful game where you guide your 'snapper' through the maze, eating dots and fruit and avoiding the creatures that chase you. Complete with full sound effects, score and a ladder of high scores.

Rocket Raid (price £9.95) sends you on a mission to raid a heavily guarded Martian fuel depot. You must fly your rocket over mountains and through caverns, avoiding enemy missiles and dodging convoys of deadly fizzers.

Increase your business acumen.

Desk Diary (price £9.95) is an indispensable program that can hold a file of several hundred names, addresses and telephone numbers.

And **View**, a program that enables your machine, together with a printer, to operate as a fully operational word processor. (The program is in ROM, but can easily be fitted to most BBC Micros by your local dealer.) You can find out

your nearest stockist, just phone 01-200 0200.


Alternatively, you can buy the cassettes directly by sending off the order form below to:

Acornsoft, c/o Vector Marketing, Denington Estate, Wellingborough, Northants NN8 2RL.

Also use this form if you would like to receive the current free Acornsoft catalogue.

Please allow 28 days for delivery.

 Credit Card Holders. Ring 01-200 0200.

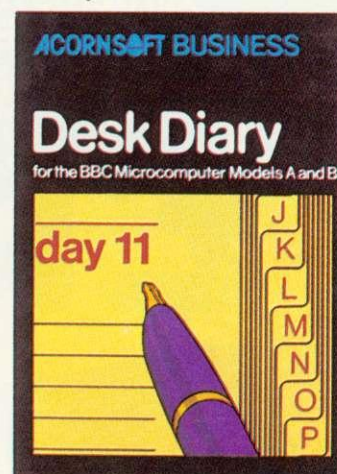

To: Acornsoft, c/o Vector Marketing, Denington Estate, Wellingborough, Northants NN8 2RL.

Please send me the following:-

PROGRAM	PRICE	QUANTITY	TOTAL	(Code Acornsoft use only)
Creative Graphics	£17.45			(SBX01/SBD01)
Word Sequencing	£11.90			(SBE06)
LISP	£24.35			(SBL02/SBD04)
FORTH	£24.35			SBL01/SBD03)
Philosophers Quest	£9.95			(SBC01)
Snapper	£9.95			(SBC04)
Rocket Raid	£9.95			(SBC05)
Desk Diary	£9.95			(SBB01)

TOTAL _____

I enclose PO/cheque payable to Acornsoft Ltd. Or charge my credit card.

Card Number _____

Amex/Diners/Visa/Access (Delete)

Please send me the Acornsoft brochure. ☐

Name _____

Address _____

Postcode _____

Signature _____

Registered No. 1524763

AU3
VAT No. 215 8123 85



ACORNSOFT

Official BBC Programmers Kit

for all BBC Microcomputer users!

De-luxe BBC Programmers Kit consisting of:

- * 100 sheet flowchart pad with de-luxe BBC grip binder
- * 100 sheet screen layout pad with de-luxe BBC grip binder
- * 100 sheet symbol design pad with de-luxe BBC grip binder


PLUS super quality BBC ringbinder to store your programmes and notes

**All items finished
in Official BBC Livery
and specially boxed.**

Price
only

£15

R.R.P.
(inc.VAT.)

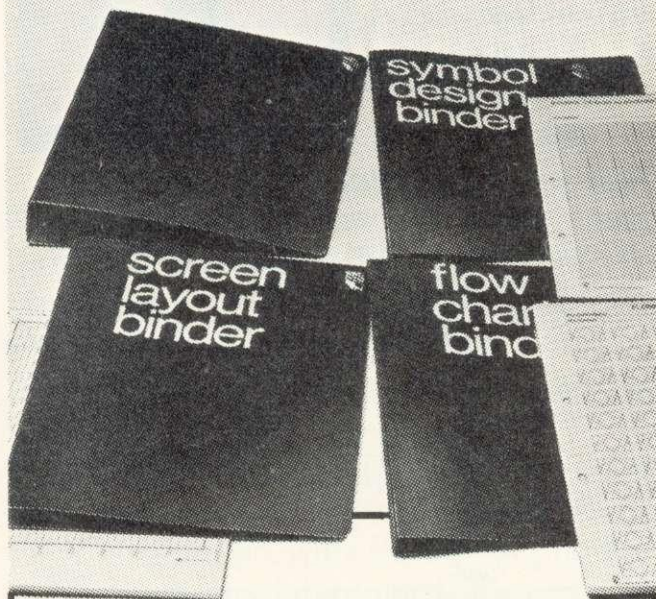

Available from
your BBC Microcomputer dealer,
or in cases of difficulty add £1 post and packing
and order direct from:

**Intastor Micro Aids,
FREEPOST,
Stroud,
Gloucestershire, GL6 1BR.**



Trade Enquiries welcome.

VOCABULARY


Do you or your family have French vocabulary to learn? If so, this program is meant for you! Enter a list of phrases with their French equivalents, and the computer will quiz you until you know them. You can then save the list on tape, and revise it later. French accents are catered for! The program comes complete with 800 words of vocabulary to start you off, and runs on a 32K BBC micro.

Send a cheque for £6.50 plus 50p p&p to

**J. Hargreaves, Updown, Pewley
Way, Guildford,
Surrey GU1 3PY**

AT THESE PRICES YOU CAN SWITCH OVER TO A PROFESSIONAL VIDEO MONITOR

FROM
ONLY
£86.00



The Kaga range of monitors is designed specifically for use with micro-computers, offering flicker-free character and graphic displays. There is a Kaga monitor suitable for use with your system, be it an Apple, Commodore, BBC Acorn, Osborne, Tandy, NEC, Sharp or any other popular micro.

- High-res. 12" B/W inc. Cable £86
- High-res. 12" Green inc. Cable £96
- High-res. 12" Amber inc. Cable £102
- 12" RGB Colour Monitor (med. res.) £225
- 12" RGB Colour Monitor (high res.) £276
- RGB Cable for BBC £8

**For
your
BBC
Acorn**

Phone for our latest low prices.

AIMGRAM

(09277) 68211

AIMGRAM LTD 31 Roman Gardens, Kings Langley, Herts WD4 8LG Tel: Kings Langley

This month's problem is in two parts. The first is for under-13 year-olds only. Please give your school and class with your answer.

a) The words King and Knight are both perfect squares (ie the squares of whole numbers). If each letter stands for a different digit what positive numbers do they represent?

b) This is for everyone. In 1752 the government 'stole' 11 days from the people by introducing the Gregorian

calendar. Assuming the twentieth century began on January 1 1901, are there any days of the week on which a new century cannot begin?

Answers on a postcard please, to arrive not later than May 3. Three winners will receive two packages of Acornsoft programs - worth about £20. Please specify which micro you have. Entries to: April Competition, Acorn User, 53 Bedford Square, London WC1B 3DZ.

►page 75

adopted. The Edison Mimeograph, for example, which went into production in the 1890s grouped together letters such as *the*, *and*, *of* and *ing* which resulted in a more logical structure. Other manufacturers built typewriters with keys arranged in semicircular rows and had independent keys for upper and lower case letters - all to no avail.

The only minor success at reforming the QWERTY keyboard came in the 1940s when an American, Dr August Dvorak, proposed a layout to increase performance. The new design placed the five vowels under the left hand and the five most frequently-used consonants under the right. This keyboard has many fans, particularly among computer enthusiasts, and as more personal computers are produced with all keys independently user-definable, there might be a shift from the QWERTY layout.

Incidentally, do you know what is the longest word so far known that you can type using only the top row of a QWERTY keyboard? The answer is at the end of this article.

The original specifications of the BBC micro state that the keyboard action 'must be acceptable to a professional typist'. As the Beeb begins to link up to disc systems (without which no serious word-processing can really begin), it will be interesting to see if this objective is achieved. Personal taste makes objective standards difficult to set. However, I did see something

recently which caused a grin. A reviewer writing about the Spectrum declared that '... a touchtypist would find it very satisfactory'. The idea of a touchtypist coping with a rubber-membrane keyboard, not to mention only one shift key, is ludicrous and shows how much that reviewer understands about the needs of people who deal with words all day.

My main grouses about the BBC keyboard are the absence of a numeric keypad and the way the Break key destroys your program (on most computers it merely acts as a boon to sloppy programmers - you can see what your Basic program is doing and then type CONTINUE without destroying the variables). I also continually hit the reverse arrow key instead of ERASE when I want to backspace - a legacy from using typewriters and other computers.

However, compared to many computers the keyboard on the Beeb is delightful. I recently had a session on the much-vaunted IBM

Personal Computer. Quite apart from the astonishingly mean-minded approach to the layout, the racket the keys made was frightful. Presumably IBM, in its wisdom, decided secretaries aren't going to be happy unless they hear the clicking of the keys.

A recent development which is a godsend to writers who want portable machines is the Microwriter. This has an 8k RAM (which will store around 1200 words) and allows the user to enter the entire ASCII character set using only six keys. It also interfaces to a TV or monitor, telephone modem or printer, and other devices via an RS232.

Norman Giller, who does 'The Name Game' in *The Sun* and ghost writes the books of sportsmen such as Jimmy Greaves and Tom Graveney, swears by his Microwriter, which he says took him a few days of practice to get up to two-finger typing speed.

The main drawback of Microwriter is the price - £485 before buying any interfaces. However, the company claims it will be announcing something 'very exciting' to do with the Beeb later on this year, and says that so far all its marketing has been directed at the business rather than consumer market.




No doubt future generations, accustomed to direct voice input and response from their machines, will laugh themselves silly at the thought of us tapping away day and night.

As Simon Dally said on page 75, he has broken his leg. However, as only the best types write for AU, he will continue to do the competitions. Assessing the results may be delayed, but winners will get their prizes.

Answer - TYPEWRITER

BETTER THAN THE RUBIC CUBE!

HUNGARIAN

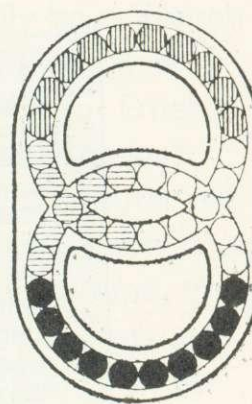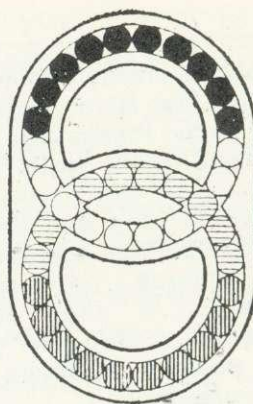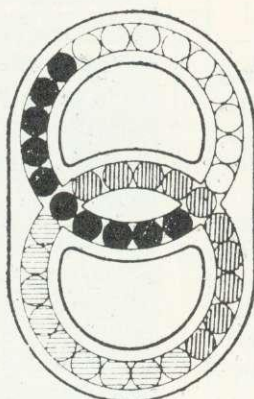

Now's your chance to get the latest craze that's sweeping the country – Hungarian Rings. Just 38 marbles in four colours in two interconnecting grooves, but with 10,000,000,000 variations. Move one marble in one groove and at least two other marbles move from their original position. Try to get all four colours together – that's almost easy. Try not to get two

colours touching – that will drive you crazy. Strongly made – it won't break – you will have to throw or give it away. Makes a super present for someone who has been driving you crazy.

Just send £3.99 which includes VAT and p+p and we will send you one straight-away.

Dealer Deals Ltd.
20 Orange Street
LONDON WC2H 7ED

Dealer Deals Ltd
20 Orange Street
LONDON WC2H 7ED

Please send me (qty.)
Hungarian rings I enclose
PO/Cheque for £
Name:
Address
.....
.....

B.B.C. DESKTOP CONSOLE



TIDY UP YOUR B.B.C. COMPUTER.

TELEVISION—CASSETTE RECORDER—SINGLE
OR DOUBLE DISC DRIVE

ALL ACCOMMODATED ON A PROFESSIONAL
CONSOLE

THIS ROBUST G.R.P. CONSOLE ALSO HAS
PROVISION FOR 10 CASSETTES AND A
FOOLSCAP NOTEPAD.

SIZE:- 27½ (700mm) × 31½" (800mm)

A WORTHWHILE INVESTMENT AT £39.95
INCLUSIVE OF P & P.

CHEQUE OR P.O. TO:-

LAMPLAS (DURHAM) LTD,
7/9 RAMSAY STREET,
HIGH SPEN,
ROWLANDS GILL,
TYNE & WEAR.

DEALER ENQUIRIES INVITED.

ZX AND ORIC CONSOLES AVAILABLE
SHORTLY.

BREAKDOWN INSURANCE

When your guarantee expires, breakdown repairs may well involve you in costs of £10/25 per hour plus parts.

Insurance is available to provide cover for computers, monitors/tv's, cassette recorders, disc drives, printers etc.

Uses for which cover can be arranged include home, business and education.

Whether your equipment is worth £50 or £5,000 you will find the cost of insurance is very acceptable.

Full details will be sent on receipt of a note of your name and address together with the value, age and use of your equipment. (No stamp required).

BALL & CROSBY (INSURANCES-AU) LTD.,
FREEPOST
25A PARK SQUARE
LEEDS LS1 1YY

SPECIALISTS IN COMPUTER INSURANCE

MEMBERS OF THE BRITISH INSURANCE
BROKERS ASSOCIATION

Midwich

COMPUTER COMPANY LIMITED



1st choice for microcomputer components



QUALITY & VALUE

Every product in our catalogue is carefully selected as being of the highest quality and is backed by our 12 month "no-quibble" guarantee. Most of our range is purchased from leading manufacturers such as Texas Instruments, Motorola, National Semiconductor, Intel etc. Our bulk buying power and low overheads ensure that these products are sold at the lowest possible, often unbeatable prices.



DELIVERY & SERVICE

We guarantee to despatch by 1st class post or Securicor every order received by us up to 3.30pm that day, for goods available from stock. That means that, due to our commitment to massive in depth stocks, better than 95% of our product range is available to you within 24 hours. Every product we sell is supported by our technical enquiries department and datasheets are available on most products.

BBC MICROCOMPUTERS AND ACCESSORIES

BBC COMPUTERS

Model B	£346.95
Model B + Disc Interface	£441.95

BBC MICRO DISC DRIVES

BBC 31 Single 100K Drive	
Expandable to 2 x 100K	£229.00
BBC 32 Dual 100K Drives	£340.00
BBC 33 100K Upgrade for BBC 31	£122.00
BBC 34 Dual 400K Drives	£649.00

All disc drives (except BBC 33) complete with Manual, Utilities Disc, and Connecting Cables.

BBC UPGRADE KITS

BBCA2B Complete A to B Upgrade	£44.75
BBC 1 16K Memory	£18.00
BBC 2 Printer/User 1/0KK	£ 7.50
BBC 3 Disc Interface Kit	£95.00
BBC 4 Analogue Input Kit	£ 6.70
BBC 5 Serial 1/0 Rab Kit	£ 7.30
BBC 6 Bus. Expansion Kit	£ 6.45

All kits are supplied with full fitting instructions.

Fitting Service available

BBC CONNECTORS

BBC 21 Printer Cable and Amphenol Plug (not assembled)	£13.00
BBC 22 User Port Connector and Cable 36"	£ 2.46
BBC 23 Cassette Lead	£ 3.50
BBC 24 7 Pin Din Plug	£ 0.60
BBC 25 6 Pin Din Plug	£ 0.60
BBC 26 5 Pin Din Plug	£ 0.60

BBC 35 Disc 1/0 Cable 34W IDC to 2 x 34 way Card Edge	£12.00
BBC 36 Disc Power Cable	£ 6.00
BBC 44 Analogue Input Plug & Lever	£ 2.25
BBC 66 1 M Bus Connector + 36" Cable	£ 3.50

BBC ACCESSORIES

BBC 45 Joysticks (per pair)	£11.30
BBC 67 Eprom Programmer (assembled)	£57.95

New Acorn Electron Ring for price and delivery

ACORN SOFTWARE FOR THE BBC

SBE03 Business Games	£ 8.65
SBE04 Tree of Knowledge	£ 8.65
SBE02 Peeko Computer Inc Manual	£ 8.65
SBE01 Algebrail Manipulation PK	£ 8.65
SBX01 Creative Graphics Cassette	£ 8.65
SBX02 Graphs & Charts Cassette	£ 8.65
SBB01 Desk Diary Inc Manual	£ 8.65
SBL02 Lisp Cassette	£14.65
SBL01 Forth Cassette	£14.65
SBG01 Philosophers Quest	£ 8.65
SBG07 Sphinx Adventure	£ 8.65
SBG03 Monsters	£ 8.65
SBG04 Snapper	£ 8.65
SBG15 Planetoid	£ 8.65
SBG06 Arcade Action	£10.35
SBG05 Rocket Raid	£ 8.65
SBG13 Meteors	£ 8.65
SBG14 Arcadians	£ 8.65
SBG10 Chess	£ 8.65

ACORN SOFTWARE BOOKS FOR THE BBC MICRO

SBD01 Creative Graphics	£ 7.50
SBD02 Graphs - Charts	£ 7.50
SBD04 Lisp	£ 7.50
SBD03 Forth	£ 7.50

* Please ring for current delivery on Acornsoft products before ordering.

Fast ex-stock delivery on most items

BBC MICRO COMPONENTS

4516 100NS	£ 2.25
6522	£ 3.19
74LS244	£ 0.59
74LS245	£ 0.69
74LS163	£ 0.34
DS3691N	£ 4.50
DS88LS120N	£ 4.50
UPD7002	£ 4.50
8271	£36.00
20 Way Header	£ 1.46
26 Way Header	£ 1.76
34 Way Header	£ 2.06
40 Way Header	£ 2.32
15 Way D Skt	£ 2.15
6 Way Din Skt	£ 0.90
5 Way Din Skt	£ 0.90

BBC SOFTWARE IN ROM.

Wordprocessor "View"	£52.00
1.0 MOS	£36.00

Delivery Charges
Computers/Disc Drives £5.00
Components/Software £0.50
Books/Joysticks £1.00

THE ABOVE LIST SHOWS JUST A FEW OF THE ITEMS IN STOCK. PLEASE TELEPHONE YOUR REQUIREMENTS - OR BETTER STILL SEND FOR OUR FREE CATALOGUE



Carriage Orders up to £199 are sent by 1st class post, and £200 + by Securicor.
0-£100 0.50, £100-£199 1.25, £200 + 5.00 by Securicor.
Prices quoted (+ carriage charges) are exclusive of VAT and are subject to change without notice.
Quantity Discounts are available on many products, please ring for details.
Official Orders are welcome from Education Establishments, Government Bodies and Public Companies.
Credit Accounts are available to others subject to status. Payment is due strictly nett by the 15th of the month.
Credit Cards are accepted (Access and Visa) for telephone and postal order and NO SURCHARGE is made.
Out of stock items will follow automatically, at our discretion, or a refund will be given if requested.

MIDWICH COMPUTER COMPANY LIMITED

RICKINGHALL HOUSE, RICKINGHALL, SUFFOLK IP22 1HH
TELEPHONE (0379) DISS 898751

Please complete this coupon for a copy of our FREE catalogue.

NAME _____

ADDRESS _____

TEL. NO. _____



CUBE the power of the BBC microcomputer

CUBE is a Computer System which can extend the BBC in many useful ways

CUBE RACK

1 MHz extension, in Eurorack form, which can take any Acorn or CUBE Eurocard module e.g.

- Analog I/O
- Digital I/O
- Industrial I/O
- Real-time clock
- Hi-res video

1 MHz interface to take 4 Eurocards

£49*

CU-PROM

EPROM programmer with auto-start and PROM reading facilities. Will program 25** and 27** series up to 256 K

£119*

800 KB DISK PACK

Twin 80 track double-sided disk pack with cables, utility disk and manual

£605*

BBC micro also requires disk interface, if not already fitted

£95*

Disk pack and disk interface

£700*

C-LION

I/O network, driven serially from BBC micro via 4 wire system. Permits 64 modules on network e.g.

- Analog sensor
- Analog output
- Temperature sensor
- Triac switch
- Relay switch

Each module around

£50*

PICONET

A Local Area Network linking BBC micros, AIM 65s and Atoms. The central disk file server and printer server can be an Apple or a CUBE

Fileserver from


£800*

Station modules

£40*



*All prices exclude VAT.



**Control Universal Ltd
The Hardware House**

Unit 2, Andersons Court,
Newnham Road, Cambridge CB3 9EZ
Telephone (0223) 358757

AMBER 2400



***** AMBER 2400 MATRIX PRINTER *****

USED WITH MANY COMPUTERS
INCLUDING BBC, UK101, ATOM,
DRAGON, NEWBRAIN, ATARI,
TRS-80, VIC-20 AND MZ-80K

LOW RUNNING COSTS USING
PLAIN PAPER.
24 COLUMNS WIDE.
GRAPHICS CAPABILITY.
SERIAL & PARALLEL INPUTS

AMBER CONTROLS LIMITED
Central Way
Walworth Industrial Est.,
Andover
Hampshire SP10 5AL

ORDER FORM

Please send me ☐ Printer with parallel lead for:
BBC ☐ Acorn Atom ☐ Dragon ☐ @ £101.15 inc. VAT (+£2.95 p+p)
I enclose cheque/money order (delete where necessary)
made payable to AMBER CONTROLS LTD. for £ _____
OR debit my Access/American Express/Diners Club Card
(delete where necessary) ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐
(allow 28 days for delivery)

Post to: **AMBER CONTROLS LTD., DEPT. JG2, CENTRAL WAY, ANDOVER, HAMPSHIRE. Telephone (0264) 54524**

Please use BLOCK CAPITALS

Name: _____

Address: _____

Postcode: _____

Signature: _____

HARD COPY MADE EASY

Let's start with a simple explanation of binary numbers, which is the system all computers use.

Data is transferred from place to place in the computer in bytes, each of which corresponds to a number between 0 to 255. The computer is based around electrical circuits which are able to detect the difference between a wire carrying 2.5 volts and a wire carrying 0 volts. Circuits do not discriminate between minor voltage changes, but merely categorise the state as 'high' or 'low'. The computer, then, has the equivalent of two fingers, compared with our 10. It works in the number system based on 2, the binary system. Translation mechanisms enable it to converse with us via the screen and keyboard, but it communicates with other machines, such as the printer, in binary.

The binary system has two symbols to represent its numbers, 0 and 1. (The decimal system has 10: 0,1,2,3,4,5,6,7,8 and 9.) A digit is a single symbol within a number, the position of which within a number tells you what it represents. For example, 255 (decimal) : the digit 2 represents 2×100 , the first 5 represents 5×10 , and the second represents 5×1 .

A byte consists of eight binary

George Hill guides you through the jargon jungle which surrounds anyone trying to buy a printer in the second of his articles. Next month he tackles writing graphics software dumps and reviews one of the latest products

digits, and each digit in a byte is referred to as a bit. A typical byte would be 10010111. It represents the number 151 (decimal). This is best demonstrated by figure 1.

Normally the bits are transferred from place to place on a 'data bus', - a set of eight wires which connect the various parts of the computer, eg, memory to central processing unit (CPU), or CPU to the other chips which control input and output of information. The least significant bit (ie the 'units' bit) goes on wire 0 and the most significant bit (the 128's bit) goes on wire 7. A byte is transferred by sending voltage pulses along all eight wires at the same time. Thus all eight bits start out together and arrive together. This is parallel data transfer, illustrated in figure 2. A potential of 2.5 volts on the wire

represents a 1, and 0 volts represents a 0. The computer's own internal clock takes care of the timing of these pulses.

When transferring a byte to a printer the computer must first check the printer is ready to receive data. It then sends the data. Then it sends a short pulse (called a 'strobe' pulse) to say the wires now contain the data and should be read. It finally asks the printer whether it understood, and repeats the whole process for the next byte.

This clearly requires the sending and receiving of more than just the eight bits on the data bus. Extra wires are required to carry the additional information. The whole process of communication of the 'status information' between computer and printer is known as 'handshaking'. There are many different conventions for handshaking just as there are between groups of people. Each particular convention is referred to as a 'protocol'. A typical set-up is illustrated in figure 3. The signals are shown as changes from low to high, but changes from high to low would do just as well.

Parallel data transfer requires a minimum of 10 wires for communication of data and handshakes, plus one 'signal ground' or 'earth' wire, a total of 11. However,



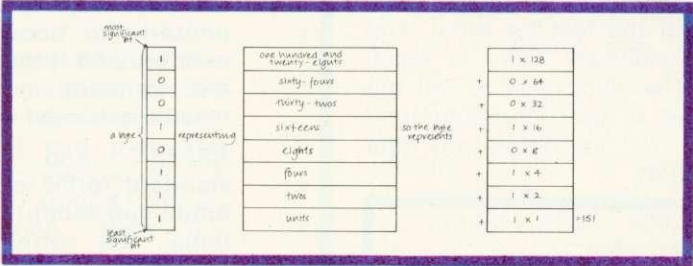


Figure 1. Binary representation of decimal number 151 (left)

Figure 2. Parallel data transfer (below left)

Figure 3. Protocol (conventional) for handshaking (communication of status) between computer and printer in parallel (below)

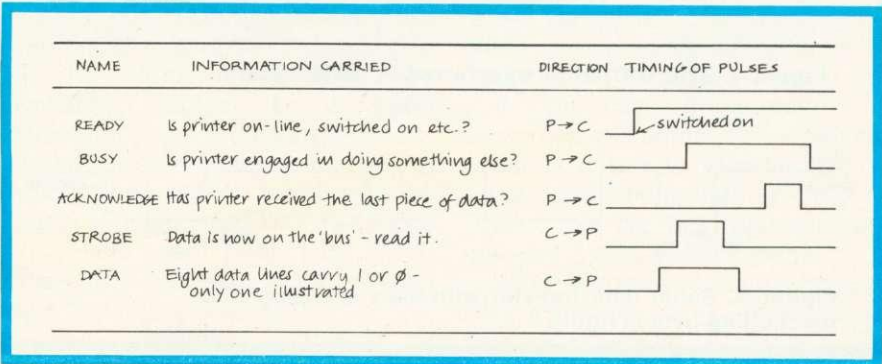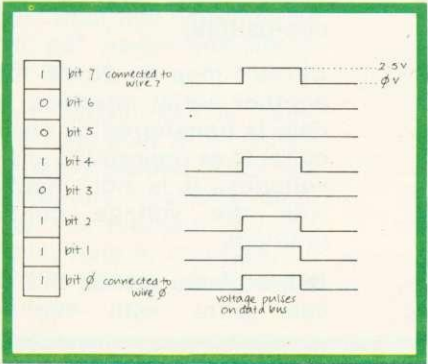

13 or more connections are common.

In a serial system, the data is transferred along a single wire, bit by bit. The byte 10010111 would therefore appear on the transfer wire in the form shown in figure 4. The bits are again represented by voltages on the wire, but commonly a 1 is a positive voltage (3 to 27) and 0 is a negative voltage (-3 to -27). Handshaking arrangements must be made, but these are different in nature from the parallel arrangements. First, the printer must be told where a particular byte starts and stops. If this information were absent, there would have to be extremely close timing accuracy between computer and printer. This can be achieved by running both off the same clock pulses, (a 'synchronous' system) but the longer the lines from computer to printer, the more difficult this is to achieve. The serial system was developed to transfer data along telephone or other landlines between terminals and mainframe computers, so the distances would be great. When adapted for home computers, this problem is less acute, but the 'asynchronous' system is still preferred over the synchronous.

In an asynchronous system, the computer and printer have their own internal clocks running at the same preset rates, and the data is read at certain intervals after the arrival of the 'start' bit. Figure 5

gives an idea of how this is accomplished. A 'start' bit has been added to signify the arrival of a byte, and two 'stop' bits give a gap between bytes. A 'parity' bit has also been added which can check whether there is an odd or even number of 1s in the byte sent. This enables errors on transmission lines, due to external pulses, to be trapped. It is not normally sent by micros, so the printer must be instructed to 'ignore parity'. The data line is normally in the 'switched on' state while no data is on the wire. This means breaks in the transmission lines halt transmission automatically, and makes fault tracing easier.

The rate at which the computer puts data on the line is measured in bits per second, and this is known as the 'baud' rate. Thus if each pulse lasts 1/1200 seconds, this baud rate is 1200 bits per second, or 1200baud. The units are variously referred to by abbreviations b/s, bs^{-1} , bit/sec, bps etc. The SI system of units has yet to impinge on computing!

A discrepancy in timing between computer and printer might cause mis-reading of the data. Hence the timing must agree to about five per cent, otherwise the 'trailing edge' of the last bit might pass before the printer has read it, or the printer might read the last bit twice, and become confused. Thus in serial transfer it is necessary to set the baud rates of both computer and printer to coincide before any data is transferred.




Figure 4. Byte 10010111 transferred by serial system




Figure 5. Serial data transfer with start and stop bits bracketing byte in figure 4

JARGON UN

Printers have as much jargon associated with them as the rest of computing. Here are some explanations of the more common technical terms and advertising puffs.

Port: The CPU (sorry, central processor) communicates with peripheral devices (sorry, those external to the computer) via another microprocessor which converts the signals to the necessary form to be output, and decodes incoming signals. This microprocessor is itself an 'interface adaptor' and its connections with the outside world constitute a 'port'.

Centronics and **IEEE488** are two of the standard parallel interfaces, and are not necessarily compatible.

Modem: When a computer communicates along landlines or via satellite links, a **MODulator/ DEModulator** is necessary to boost, or change signals for travel down the line, and to unravel them at the other end. This is a modem. If the distances are short (as they are between computer and printer), no boosting may be needed, and if the connections are standard, communication may be achieved directly.

RS232C and **RS423** are standard forms of connection. Small sub-sets of their connections are often used for connecting micros to printers. These two are completely compatible.

Current loop or 20mA: This is another serial interface where data is transferred by changing currents as opposed to changing voltages. It is not compatible with the voltage controlled methods.

Bidirectional means the printer can print with the head



UNRAVELLED

travelling in either direction. It usually indicates a faster printing speed than is possible in uni-directional printers.

Logic-seeking means the bi-directional printer will start printing at whichever end of the line it is currently nearest to. It is unlikely to improve printing speed enough to be worth bothering about.

True descenders: This jargon indicates that letters such as 'y' and 'g' which should have sections below the line, will actually look as they should. It is often an indication on a dot-matrix printer that it has nine dot-wires rather than seven.

Full graphics capability: Beware! This might mean anything. Graphics capability in any printer is a matter for a full article in itself, but performance is linked to number of dots per line. A full capability requires at least 640 dots per line with each dot individually addressable. Anything less is going to involve great skill in programming and some trickery to obtain more than a single tone picture.

High res graphics: Whose? The resolution in graphics modes varies greatly between computers. If you can plot 320 separate elements in the X direction, and around 200 in the Y direction, then the requirements above apply. If your graphics can plot fewer elements than this, you may be able to get away with fewer dots per line.

Buffering: When data is transferred it is placed in a 'buffer' before being printed. This is a small memory specially dedicated to this function. A large buffer may help to increase the speed of printing, particularly for graphics.

Baud rates are normally set at the printer by DIP switches, or jumpers connecting points on the circuit board. Thus to change the rate normally involves a foray into the bowels of the printer with a screwdriver, although once located the switches are normally easy to set. The baud rate is set at the computer by sending a sequence of commands from the keyboard, details of which can be found in the manual. It is important to realise that the baud rate decides the rate at which bits are transferred, not characters. The rate of transfer of characters will always be below the theoretical maximum.

To complete the communication system, it is at least necessary for the printer to be able to interrupt the computer if it cannot keep up. Thus the minimum handshaking arrangement will require the presence of a second wire to take this 'busy' signal back to the computer, and at high rates more sophisticated methods may be necessary. A third wire will act as the signal ground.

The principal comparisons between the two methods of connection fall into three categories: rate of data transfer; circuitry; ease of connection.

Theoretically the parallel mode is much faster as data is transferred at the maximum rate which the computer can manage. In practice, all printers within our price range (say up to £500) have a maximum printing speed of around 100 characters per second. To transfer this requires about 1200 bits per second on the data line in the serial mode. (Each character needs 8 data bits, start, parity and two stop bits, a total of 12.) Thus as long as the higher baud rates are available, subject to a 1200 minimum, you are unlikely to detect any major differences in the rate at which the printer produces its output. (Printers used with mainframe computers can print over 1000 characters per second, so parallel data transfer is essential.)

Less electronic juggling is

necessary to transfer data in parallel, as it can be sent and received in the form that the microprocessors at either end use normally. In serial transfer the computer must convert its normal output of eight parallel pulses into a 'train' of pulses, and the printer must do the reverse, ie decode the train and re-convert it to parallel form. This is why the serial option often involves extra expense, and the purchase of an extra interface board in computer, printer, or both.

The serial mode wins hands down when it comes to connections. Normally only three wires are needed to effect connection and, for simple printer use, never more than four. The possessor of a soldering iron will be able to construct such a cable easily, and it is a job that the complete beginner should not fear. I would not recommend the amateur to attempt to build a parallel connection cable. This requires a minimum of 11 connections, and mistakes might cause damage. Furthermore, parallel connectors are often made in 'ribbon' cable, which requires special tools in its handling. A second disadvantage of the parallel mode is that ribbon cable is a nuisance as a means of linkage because it gets in the way even more than ordinary cable!

In actual fact, it probably doesn't matter which you choose, but answering the questions in the box opposite will give you a better idea.

You should try to have both options available if possible and use the parallel option if it is cheaper, or if printing speed is affected by the available baud rates. Otherwise use serial as it offers greater ease of connecting (and mending) cables.

If you have more than one computer or printer it is almost certainly easier to standardise on serial connections than on parallel. Finally, use the highest baud rate possible if connected in serial.

When it comes to connecting up, take care as it is possible to damage computer or printer if you



get it wrong. Serial voltages are higher than parallel, so be careful to ensure the two devices are matched.

First read the manual (frequently a bewildering and distressing experience) to discover the whereabouts of any DIP switches and links which need checking. Set the printer for the selected mode of operation (serial or parallel). If in serial, set the baud rate to the maximum your computer will support (normally 9600 b/s). Now set any switches controlling paper length, wraparound, auto-linefeed, etc to reasonable settings. (They are normally set before leaving the factory, and you may leave altering them until after an initial trial.) Check that any 'protocol' switches are set to match computer and printer. (Centronics unblocked is normally a safe setting.)

Replace the lid on the printer if necessary, and join the computer and printer with the correct cable. Beware of two things. First, never force connectors, as pins are fragile, and once bent are difficult

to unbend without damage. Second, ensure you have put all the connectors in the right way up. Most are impossible to insert upside down, but the BBC micro has a serial plug which can be plugged in upside down. It only works one way up!

Switch on and place the printer 'on-line'; often achieved using an external button or switch. Most printers are on-line when switched on, (a light usually indicates the on-line status). Some need to be placed on-line every time they are used, others have no switch, and are always on-line.

Call the printer with the code used by your computer. This will consist of one code to select serial/parallel operation (if you have the option), and a second to select baud rate if in serial. Now type in the code to switch on the 'echo printing', ie, to make the printer print everything that appears on the screen. This is CTRL B on the BBC and Atom, but CTRL P is more common. The printer should now echo anything typed at the

keyboard, when terminated by a carriage return.

If your keyboard 'hangs up' or refuses to accept further input, press escape, check cables, on-line switch, and try again. If nothing happens, check the DIP switches again.

If the printer overprints everything on a single line, there may be a mechanism for controlling this from the keyboard (on the BBC micro type *FX60). If this facility is not available, alter the positions of the switches controlling auto-linefeed, and printing codes. No harm can be done by experimenting. In case of trouble, do not hesitate to contact the manufacturer. I have found their technical advice over the telephone has been remarkably good. They clearly have expertise concerning their own printer which cannot be covered in a general survey of this type.

Finally, a repeat of last month's warning: Don't buy a printer unless you have seen it in action, preferably connected to your own type of computer.

SERIAL, PARALLEL or BOTH?

1. Does your computer support serial and parallel printing? (If so skip question 2).
2. Is it worth the fuss and expense of fitting the necessary serial interface board? (See 3 and 4 for reasons why you might find it necessary.)
3. Are all the capabilities of computer and printer identical in both modes? (An example of a critical difference: The RML 380Z uses bit 7 as the 'strobe' pulse in parallel; hence it is impossible to carry out any graphics printing in parallel.)
4. Are you going to want to use both options for different purposes in the same program? For example: to use the parallel port to control a device, while leaving the printer hooked up to the serial port; to use

the serial port for communication with another computer, while leaving the printer connected in parallel.

5. Does the printer you can afford have both options available? If not 3 and 4 may offer limitations in its use.
6. Are the interfaces of the computer and printer completely compatible? There are several different methods of connection in both modes. For example, IEEE and Centronics parallel, and RS232C, and current loop serial. These are not compatible with one another, so check before buying. Most home computers and printers seem to have one or both of Centronics parallel, and RS232C serial. Many printers with a serial board contain facilities to take both RS232C and current loop input.

OFF RECORDS...

The London ACORN-BBC Centre
Suppliers to Schools and Colleges
Maintenance Contractors

Atom:

Full hardware and software support.

BBC:

Model A £299
Model B £399
Memory up-grades £21.99
Repair service and component supply.

Printers:

Seikosha 100 £215
Epson MX80FT/3 £385
SCM Daisywheel £485

Cassettes:

Matched Cassette Recorders £26

Monitors:

12" Green Screen (Hitachi/Phoenix) £110
12" Colour (Kaga) £255
14" Colour (BMC/Cable) £255

Discs:

TEAC 40-track £199
Shugart twin 40-track £299
TORCH dual disc drive with Z80 processor, 64K RAM, CP/M and FREE software £780

Eprom programmer:

Specially designed for BBC. Programs 12 different Eproms including 27128. Includes screen software £95 (dealer enquiries invited)

Add 15% VAT to all prices. Carriage extra.

Tapes:

Top Tape: see adverts in Radio Times.
OFF Records beats all published prices.

Stationery:

Moore Paragon main agents. Large selection of continuous stationery, forms and labels.

Books:

Browse through the Computer Book Department for educational, scientific and business applications.

COMPUTER HOUSE
58 Battersea Rise
Clapham Junction
London SW11 1HH
Telephone 01-223 7730



New Showroom:

OFF Records would expect you to buy best value. Spend some time in the relaxed atmosphere of our new showroom to find out exactly what you are getting for your money.

OFFware:

CHARAID for the design of a block of 4 characters in any graphics mode including mode-7. Outputs VDU23 commands, teletext commands and printer commands to screen or printer together with actual design. Substantial software with more than 20 well-documented commands. Indispensable for graphics work.

£7.50 p.p. & VAT incl.

ATILITY contains seven essential routines for the disc based Atom:

*COPY, *COPYT, *COPYD, *RENAME, *PURGE, *BACKUP, *AUTORUN.
£25 p.p. & VAT incl.

Vacancy:

OFF Records are looking for a bright spark with good knowledge of both software and hardware. Initially a Saturday job with a view to full-time employment.

ELECTRONEQUIP

(Authorised BBC Dealer and Service Centre)

SPECIAL OPENING OFFER DUE TO MOVE TO NEW PREMISES ALL ORDERS RECEIVED DURING NEXT MONTH QUOTING REF. ACOU/C WILL BE ENTERED INTO A WEEKLY DRAW AND 2 CUSTOMERS IN EVERY 100 WILL RECEIVE THEIR GOODS FREE OF CHARGE

THIS MONTHS SPECIAL OFFERS

BBC36	High quality 14" RGB Colour Monitor/TV. Colour monitor suitable for 80 columns with ability to receive TV	244.95
BBC45	New improved cassette recorder for BBC. Has monitor facility, counter, remote	35.88
BBC48	Dual 800K disc drives for BBC micro with free Z80 second processor card	897.00
	Large stocks of Software for many machines as well as BBC. Acornsoft, Bug-Byte, CP/M, Program/Micro Power, Computer Concepts etc.	
	Business systems enquiries welcome. Systems and Software available from 500 to 100,000	
	Torch Colour Machine 800K floppies ex. VAT	2795.00
	Torch Colour Machine Hard Disc ex. VAT	4995.00
BBC54	Daisy Wheel printer for BBC 12cps	558.90

Large stocks. Prices inclusive of VAT

BBC		
BBC1	BBC Micro Model A	299.00
BBC2	BBC Micro Model B	399.00
BBC3	BBC Model A Micro with 32K	333.50
BBC4	BBC Model A Micro 32K & VIA	339.50
BBC21	Upgrade Model A to B	99.82
BBC27	Disc Upgrade for BBC B	109.25
BBC30	14" Colour Monitor for BBC	286.25
BBC33	BMC12A 12" Black/Green Monitor	90.85
BBC34	12" Black/Green Monitor for BBC	113.85
BBC35	12" Black/Amber Monitor for BBC	129.95
BBC36	14" Monitor/TV. 80 columns	244.95
BBC40	Cassette Recorder for BBC	29.90
BBC41	Single 5.25" Disc Drive 100K	265.00
BBC42	Dual 5.25" Disc Drive for BBC	447.00
BBC48	Dual 800K low profile disc drives	897.00
BBC49	5.25" Discs for BBC 40/80 tracks	2.20
BBC50	Epson MX80T type 3 for BBC	373.75
BBC54	Daisy Wheel printer for BBC	558.90
BBC70	Plinth/Stowage for BBC	29.90
BBC80	Cassette lead for BBC	4.60
BBC95	Printer lead for BBC	17.25

All prices inclusive of postage except micros 3.00

All Upgrades etc. are fitted free of charge and the computer fully re-tested. Access and Barclaycard welcome

ELECTRONEQUIP

36-38 West Street, Fareham, Hants PO16 0JW Tel: 0329 230670

BITS & BYTES

44 Fore St. Ilfracombe, Nth Devon. Tel: (0271) 62801

ACORN DEALERS, BBC, DRAGON, VIDEO GENIE SALES & SERVICE EPSON HX20 COMPUTER

Atom Micros.	BBC Upgrade Kits
Colour Monitors	BBC printer interfaces
Seikosha GP100A Printers	5¼" Floppy Discs
Epson Printers	C-12 Cassette Tapes
Monitors—12" B/W	Cassette Recorders
Monitors—12" Green	Continuous Stationery Software
5¼" Disc Drives (C/W P.S.U. & CASE)	Software written to order

REPAIRS & SERVICE

To all Micros

OAKLEAF COMPUTERS LTD

Education Hobbyist &
Small Business Computers



JUST RELEASED
£22.95

IT'S NOT JUST
ACORNS THAT
LOOK BETTER
ON AN **OAKTREE
WORKSTATION**

THE UNIT SUITS BBC VIC 20
TRS 80 ZX SPECTRUM ETC.

With a built-in accessory drawer,

this smart unit turns your setup into a professional and business like system. The drawer holds up to 50 diskettes or your tape collection and leads etc.

TWIN USER JOYSTICK INTERFACE ATOM/BBC £13.95

Protect the keyboard of your computer by interfacing "Atari" joysticks to it. The joysticks plug into the interface which in turn simply plugs into either the Atom 64way bus or the BBC 20way user port. (Atom bus units available at £3.99 if ordered with the interface). Now two people can successfully play games or one person can have more control over the computer. Full software supplied.

BBC MODEL B NOW IN STOCK

ATOM LATEST

If Atom have made it, we stock it. Disk drives off the shelf. Hardware, books, printers. Phone now. Prices always competitive.

Full or partial upgrades, memories, printers of disk interfaces etc. All available. Prices dropping. Phone for quotation. All current BBC peripherals stocked.

ALL PRICES INCL. VAT AND P&P
Please send your remittance to:

121 DUDLEY ROAD GRANTHAM,
Lincs. NG31 9AD




ACORN

SPECIALISTS TELEPHONE: (0476) 76994

TIMESHARE YOUR COLOUR MONITOR WITH THE FAMILY

£299 inc. VAT

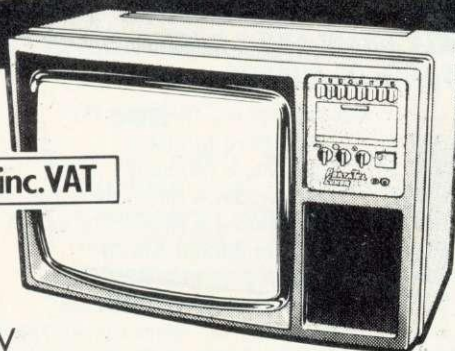

COLOUR TV

PLUS RGB MONITOR PLUS PAL VIDEO AND AUDIO

PortaTel-LUXOR. RGB 3711



EXCELLENT
RESOLUTION
AND GEOMETRY

BBC MICRO LEAD INCLUDED



PORTATEL CONVERSIONS LIMITED,
25 SUNBURY CROSS CENTRE,
SUNBURY-ON-THAMES,
MIDDLESEX TW16 7BB
Telephone: Sunbury-on-Thames 88972

EXTENDED COLOUR-FILL GRAPHICS E.C.F.G. GIVES YOU A CHOICE OF

!! 4 BILLION + !!

SHADES FOR TRIANGLE FILLING IN BBC MODES 0,1,2,4 & 5

- * PLOT 81 and 85 commands for triangle-filling have been adapted to use the ECFG fill-shade currently selected by new ECFG user-friendly commands. GCOL is still used for line colour.
- * Easy choice of 17, 289 & 6561 subset colours between those normally available in 2, 4 & 16 colour MODEs. Further options include colours, angles, spacings & widths of cross-hatch etc.
- * ECFG commands can be used in BASIC, typed from the keyboard, accessed in Assembler, or in future BBC Micro languages. ECFG is MOS-adaptive, and proven with versions 0.1 to 1.2
- * Bootstrap from cassette rapidly builds an ECFG module at a RAM address pre-defined by PAGE, which is then automatically increased 512 bytes to allow immediate LOADING of programs etc.

Price : £10 inc : Mail Order only

GAELSETT (ECFG)

44 EXETER CLOSE, STEVENAGE, HERTS. SG1 4PW.
(Tel. Stevenage 51224)

Letters

Acorn User
53 Bedford Square
London WC1B 3DZ

Boggled by the line numbers

Sir, Can you please explain the mind-boggling system used to store line numbers in BBC Basic. I don't mean the numbers at the beginning of lines, which are stored as normal two-byte binary integers. It's the line numbers after GOTOs, GOSUBs etc that are so puzzling.

As far as I can make out, they occupy four bytes. The first is some sort of token with the value 8D. The other three hold the binary value distributed as follows:

2-byte binary

a	b	c	d	e	f	g	h	i	j	k	l	m	n	o	p
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

3-byte binary

0	1	k	l	m	n	o	p	0	1	i	j	a	b	0	0
								0	1	c	d	e	f	g	h

with the added complication that the pairs i,j and a,b are Exclusive OR'd with 01.

There must be good reason for adopting such amazing code.

Joan New
London

When a line of Basic is typed into the Beeb it is 'crunched' - ie each keyword which Basic recognises is turned into a binary number in hexadecimal format called a 'token'. For example, ELSE becomes 8B (see 'User Guide' p483). This is done so each word takes up fewer characters in memory.

Now, when a keyword such as IF...THEN is used, the machine looks for a possible matching keyword, such as ELSE. However, it is possible (but very unlikely) that a line number after a GOTO will have the same token as ELSE, in which case it would be recognised as ELSE and acted upon - resulting in heaven knows what.

So line numbers after GOTOs etc, are encoded in this way so they

cannot be confused with ELSE, or certain other tokens.

This 'amazing' technique was designed as the most efficient way to avoid the problem above. Although it may take a relatively long time to generate a line number token (which the user won't notice while typing or loading), it is very quick to turn back into a usable form.

Expecting zeroes

Sir, I have an 0.1 OS (EPROM) BBC micro. On investigating the resident integer variables from switch-on (eg using PRINT A%), I find the initial assignment of variables A% to O% is -1 and P% to Z% is 0. Why are they not all initially set to zero, as I was expecting?

G.Rooker
London

The integer variables are not initialised at all. Their value is determined by the contents of RAM at switch-on.

fault had disappeared.

I recognise C.Dickens symptom and question your analysis, as the TV I used was new and stable in modes 4-7. However, could there be an environmental problem? The location in Gloucestershire is only one mile from the large USAF refuelling base and their large radar installations.

I was unable in Gloucestershire to measure the mains voltage, which was my first suspicion, particularly as father-in-law finds that after 10pm he cannot 'load' or 'save' when using his ZX81. However, when he returns to his system the following morning, having touched none of the controls, the machine loads and saves trouble-free!!

Chris Allard
Middlesex

It sounds as if we should put together a map showing areas of known video interference. Has anyone living near the radar 'golbballs' in Fylingdales, Yorkshire, noted a similar problem?

Disappearing act

Sir, It's only two months since I bought a BBC model B and something seems to be going wrong. When typing in a program there's a buzzing sound in the speaker that gradually builds up, and when I get to the tenth or eleventh line - well!! Everything flashes and disappears...

Could you tell me if this is a serious fault?

Suzy Diver
Croydon


Radar pollution?

Sir, I would like to add my experience to that of C.Dickens of Wiltshire ('Acorn User', Letters, February). I too have recently upgraded a model A to model B and have been satisfied with the machine's performance. By way of demonstration I took the machine to my father-in-law who lives in Gloucestershire (adjacent to Wiltshire!) Imagine my dismay when, having loaded and run 'Defender', an impressive graphics demo, I experienced an annoying 'shudder'. This is best explained as a jumping between line 0 and line 1 of the whole display and was unique to modes 0 to 3. Indeed, by interrogating every mode I became increasingly concerned that there was a failure with the upgrade. However, on return to Middlesex the

We've asked the lads at Acorn about this, and it seems to have them stumped. They suggest that you send the machine to their service people (Retail Control Systems, Gresham House, Twickenham Road, Feltham, Middx) describing the problem and they'll sort it out. It is advisable to insure the machine if sending it by post.


Loading fix for tape players

Sir, I have noticed a number of people using the Philips N2234 cassette players with computers. I purchased one a few months ago thinking it would cure my loading problems which I had with my old clapped-out cassette player. Anyway, on getting it home and plugging it in, my joy was dashed when I found the new cassette player was worse than the old one. I started to investigate the reasons with a scope and found the waveform output from the cassette player looked like:

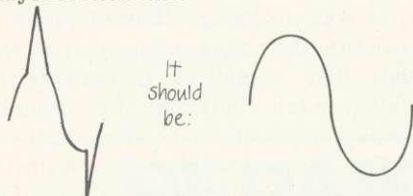

After a few hours experimenting I came up with a modification for this cassette player.

Disconnect the lead from the top of volume control and connect in series with this lead a 2.7kΩ resistor, solder across the volume control a 0.47 μF capacitor as shown in diagram.

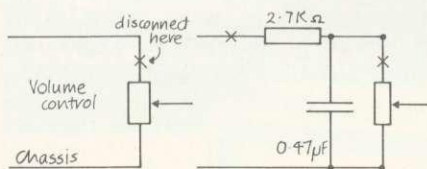

I know there could be better ways of curing this problem, but I feel this is the simplest – all you have to do is to take the back off and you can get at the volume control without any further trouble. The modification can be removed easily.

I have since fitted this modification to several of this type of cassette player and found they give no loading problems thereafter. I hope this will be of interest to other owners of this type of cassette player.

After all that, can you help me? I own an Atom and suffer with graphics interference – that is, on the simplest of programs I get flashing across the screen. I know the Atom does suffer from this (so I have been told by several other Atom owners) but is there a cure? I find it very annoying.

R. Verge
Kent

Thank you for your cassette

modification. We hope other people may find this useful.

Your problem: the reason for the 'snow' on the display during graphics operations is that the 6847 video generator is not allowed to refresh the screen whilst the CPU changes the graphics memory. This can be cured by using the following machine code before issuing any graphics commands:

```
Z=!#3FE;P=#2IC;!#3FE=P
P.$21;(LDA#B002;BMIP-3;JMPZ;)
```

After any CLEAR or COLOUR statements remember to use

```
!#3FE=#2IC
```

to restore the pointer to the new patch.

Prompt problem

Sir, Could you explain why my BBC model B becomes unable to load programs that have been saved and loaded before without problems. The screen shows the program to be loading, prints the end address but the cassette motor does not switch off and the '>' prompt does not return leaving me no option but to escape.

The computer is then unable to load anything from cassette. Switching off does not help, nor does changing the volume control. My OS is 0.1 EPROM.

B.Sargent
East Sussex

This sounds like a combination of a faulty serial ULA and the 0.1 OS problem. (See patch program, page 61, September's Acorn User.) Your dealer can either fix the ULA or replace it and only a new ROM will cure the software fault. As you have EPROMs, the dealer will exchange these for a ROM free of charge.

Terrible at maths

Sir, My new BBC model B does not add some real numbers correctly. So far the dealer has been unable to solve this problem. For example, running the program below produces the erroneous value 0.730000001 as the first of many incorrect results, and also fails the condition REPEAT . . .

```
UNTIL A=1 (therefore looping indefinitely).
```

```
10 A=0
20 REPEAT
30 A=A+0.01
40 PRINT A
50 UNTIL A=1
```

The bug has appeared on all the model B machines I have been able to test. Is this a known fault?

Paul Rynn
Chorley

Rest assured, you don't have a faulty machine. This problem occurs on computers whose arithmetic works in a certain way (which is nearly all computers). The computers use the floating point technique for calculating decimal numbers and this is only accurate to a certain number of digits. Consequently you shouldn't test to see if, for example, $A=1$, but instead you should test whether $A-1 < 0.0000001$. It's difficult to explain why, but it has to do with floating point numbers being stored as a series of fractions (eg $0.75 = 0.5 + 0.25$). Hence some numbers (eg $\frac{1}{3}$) cannot be accurately represented, however many fractions you add together.

It is possible to write a program to enable the computer to do double- or triple-precision maths. Normal floating point maths is accurate to nine digits, double to 18 and so on. A bookshop with a good computer section should be able to recommend a book on this subject.

Discs and cassettes

Sir, I own a BBC model B and I am considering upgrading it to use a disc system.

Please could you confirm (or deny) that it is possible to copy a file on the disc to a cassette tape without loading, changing the file system and then saving.

If it is not possible, is there any method of getting the same effect for non-loadable files?

A. Loyns
Lancashire

It is not possible to copy from disc to tape except by the method you describe. This applies to Basic and machine code programs.

BBC OWNERS

Why not consider the HOBBIT FLOPPY TAPE SYSTEM for your computer?

The HOBBIT gives you all the facilities you would expect from a floppy disc at a fraction of the price.

Brief Specifications

- ☆ Read/Write speed of 750 BYTES per second
- ☆ Capacity: 101K BYTES per CASSETTE
- ☆ Average access time 22 seconds
- ☆ Up to 138 FILES per CASSETTE
- ☆ Completely automatic – no buttons to press
- ☆ Fully built, boxed and tested. Just plug in and go
- ☆ System can support TWO DRIVES

Available from stock **PRICE £135.00 plus VAT**

Also available for NASCOM computers **PRICE £120.00 plus VAT**

Access and Barclaycard accepted

For more details contact:

Ikon Computer Products

KILN LAKE, LAUGHARNE, CARMARTHEN, DYFED, SA33 4QE. Tel: Laugharne (099 421) 515

The **BBC** Microcomputer Specialists


GUILDFORD COMPUTER CENTRE offers a complete range of Computers for Home, Business and Educational applications.

Large stock of additional equipment available includes:- Printers, Hard/Floppy Disc drives, Monitors etc., for most makes.

An extensive range of Business software (Accounts, Stock, Payroll, Word Processing etc.).

Drop in for a frank discussion and expert advice on your requirements or arrange a demonstration. We give a full and expert backup to ALL our sales.

Stockists of:- BBC/Acorn, Torch, Oric, Olivetti, Hitachi, TRS-80, Commodore, Dragon, Sharp, Sirius, Osborne, IBM, Newbrain, Epson, Seikosha, Cumana, etc.



**GUILDFORD
COMPUTER
C·E·N·T·R·E**

1 The Quadrant, Bridge Street,
Guildford, Surrey GU1 4SG
Telephone (0483) 578848

 **commodore**

olivetti


**ACORN
COMPUTER**

 **HITACHI**

BBC

TRS-80®

BINDERS

BBC Micro-Aid

SOFTWARE—Programs that are guaranteed to run! Save hours of work and worry with these utilities and practical programs on cassette.

2	Cashbook B	Double entry Cashbook with accounts.	£ 4.95	A/B
4	Mailing B	Database mailing system with 6 options including 2 sorts, labels, search and updating.	£ 4.95	B
5	Payroll	Two part program to handle weekly wages for around 100 employees. Fully supported.	£11.90	B
101	Cards	Beat Bruce Forsyth at his own game.	£ 2.95	A/B
102	Battle	Fast moving simulation of Falklands minefield.	£ 2.95	B
501	Banner	Print out large text and graphic characters.	£ 2.95	A/B
502	Distances	Graphic maps of U.K. EUROPE and WORLD. Calculates distances between any two points on Earth.	£ 2.95	B
503	Flags	Full colour flags of the world. Educational.	£ 2.95	B
504	Statpack	Statistics offering over 18 options.	£ 7.95	B
801	Searchbas	PROC to search a BASIC program and alter it.	£ 1.95	A/B
802	Procvar	PROC to list all variables used in a program.	£ 1.95	A/B
803	Proclush	PROC to clean out memory including integers.	£ 1.00	A/B
804	Procaid	A combination of 801, 802 and 803.	£ 2.95	A/B
805	Defchr	Design graphic characters, display and store.	£ 2.95	A/B
806	Sortm/c	Machine Code Bubble sort for up to 255 integers.	£ 1.00	A/B
807	Sortbas	A very fast BASIC sort. 1000 items in 42 secs.	£ 1.00	A/B
808	Utility A	A combination of 801-807. Super value.	£ 4.95	A/B

Coming shortly; **French Verbs & Trigonometry**

Hardware	An aluminium stand to fit over the BBC Micro to support your VDU or T.V. Saves space on your desk and protects your micro from damage. Anodised super quality.	£ 17.50 Plus p/p £1.50
Holidays	Weekends in Paris for computer enthusiasts by coach and including three star hotel. Have fun and make friends Easter at Falmouth in Cornwall for a computer jamboree. Apartments for up to 6 people at a per apartment price of July and August prices £110 and £120 per week. Visit Silicon Valley in California for two weeks, flying with Pan-Am. See San Francisco, Los Angeles and Vegas. Apartments available on Costa Brava from £39 per week.	£ 39.50 £ 10.00 per day £699.00

Download our software from Prestel on Micronet 800

Holiday Details on **Prestel *80091722 #**

If you want further information before parting with your hard earned cash drop a line to:

Micro-Aid (AU),

25 Fore Street, Praze, Camborne, Cornwall TR14 0JX.

Tel: 0209 831274

BBC Micro-Aid

NEW SOFTWARE FOR YOUR BBC MICRO

A full database program offering unlimited array power. As many columns as you like each with its own heading. Adjusted number of rows each with its own key field. Enter numbers or strings as required to fill the array. Alter, sort, search, list and evaluate data using cursor. Mathematical calculations on individual data, rows or columns. Enter your own equations or formulae and watch the results.

Memo-Calc

Order as 505 MEMO-CALC Total price just **£7.95** inclusive.

(manual £2.00 extra)

NEW FOR EMPLOYERS

An addition to our PAYROLL suite for MONTHLY staff.

MONTHLY PAYROLL 3 £5.95

For users of our PAYROLL 1 & PAYROLL 2 for Weekly staff just order PAYROLL 3 for the monthly pay calculations. Other purchasers will need PAYROLL1 (database) **£5.95**.


COME AND SEE US AT THE LONDON COMPUTER
FAIR APRIL 14th-16th

Micro-Aid (AU)

25 Fore Street, Praze, Camborne, Cornwall TR14 0JX

Tel: 0209 831274

3D COMPUTERS

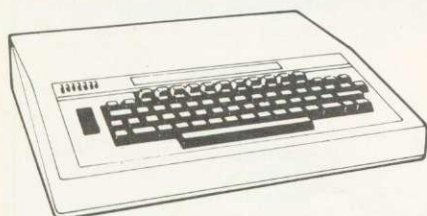

PERIPHERALS

PRINTER
COLOUR MONITOR
DISK DRIVE
TORCH Z80 DISK
CASSETTE RECORDER

SOFTWARE

ACORN SOFT
BBC SOFT
PROGRAM POWER
BUG-BYTE
HESSEL

THE ACORN SPECIALISTS

BBC Micros Ex-stock


ADD-ONS

JOYSTICK
LIGHT PEN
GRAPHICS TABLET
TELETEXT
Z80 PROCESSOR
6502 PROCESSOR
MEMORY UPGRADE
DISK INTERFACE

BOOKS

30 HOUR BASIC
BBC BASIC
BBC MICRO REVEALED
LET YOUR BBC TEACH
LEARNING TO USE BBC
ASSEMBLY LANGUAGE
30 PROGS FOR BBC

COMPUTER SHOPS OPEN 9.30-6.00 TUESDAY-SATURDAY EASY PARKING

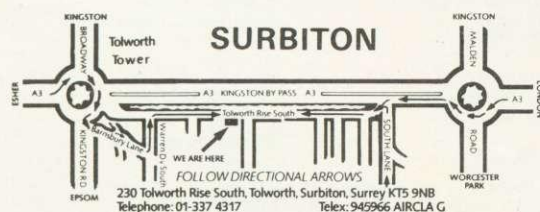

SUTTON





NEW IN HERTS

The **Harpenden Microcomputer Group** has a number of BBC micro and Atom users, I would be pleased if you would publish my name and address in your user group list. R. Welch, Secretary, 7 Tylers, Harpenden, Herts, AL5 5RT.

SOBAT IN ACTION

There is a new club for East London (mainly Waltham Forest area) called **Sobat**. It is mainly for BBC and Atom users. Membership is free and a newsletter will be distributed soon.

The club's main aims are software exchange, group discussions and the sharing of programming experience. We already have a number of programs, although we would obviously appreciate more.

Thanks for your help, and a very useful magazine! Keep up the good work. Details from T. Kayani, Sobat Computer Club, B25 Berridge Rd, Hillfield Rd, West Hampstead, London NW6.

NORWAY TAKE-OVER

The **BBC User Group** managed by Mr Morten Christiansen in Trondheim has ceased to exist, and all activity has been taken over by Oivind Grenness **BBC Norway**, O-Inform, PO Box 716, N3191 Horten, Norway.

MULTIPLE SCOUSE

The **Liverpool BBC & Atom Group** now meets twice monthly. There are two venues: First Wednesday of each month, Old Swan Technical College, Room C33, 7.30 - 9.30 pm; Third Thursday of month, Birkenhead Technical College, First Floor, Science & Maths Dept, 7.30 - 9.30 pm. For information and news

contact: Nik Kelly, 56 Queens Drive, Liverpool L4 6SH. Tel: 051-525 2934.

If you have any news or comment suitable for the User Group page, send it to the address below.

Please use the latest list when trying to contact groups, as these are updated each issue. Most groups also appreciate a self addressed envelope for reply.

Anybody else out there? Contact Acorn User, 53 Bedford Square, London WC1

CLUB CONTACTS

● Rupert Steele
Amateur Computer Club
St John's College
Oxford OX1 3JP

● **West Midlands Computer Group**
12 Apsley Road
Oldbury
West Midlands B68 0QZ

● Mr J. Price
Bedford House
27-28 St George's Road
Brighton
Sussex

● Mr P. Beverley
Norwich Area Acorn User Group
Room 12a, Norwich City College
Ipswich Road
Norwich NR2 2LJ

● Keith Mitchell
Edinburgh ZX Computer Club
19 Meadowplace Road
Edinburgh
Tel: 031-334 8483

● Steve White
Atom/BBC User Group
c/o Superior Systems Ltd
178 West Street
Sheffield
Tel: (0742) 755005

● Robin Bradbeer
Association of London Computer Clubs
Polytechnic of North London
Holloway
London N7 8DB

● Nik Kelly
Liverpool BBC & Atom Group
56 Queens Drive
Liverpool L4 6SH
Tel: 051-525 2934

● Mr C. Rutter
Medway Atom Users Club
St John Fisher School
Ordnance Street
Chatham
Kent

● **Beebug**
374 Wandsworth Road
London SW8 4TE

● Mr J. Ashurst
Acorn Computer Users Group
Abraham Moss Centre
Crescent Road
Manchester 8

● Mr D.L. Evans
23 Hitchin Road
Henlow Camp
Bedfordshire

● N.P. (Bazyle) Butcher
Harrow Computer Group
16 St Peter's Close
Bushey Heath
Watford WD2 3LG

● R. Welch
Harpenden Microcomputer Group
7 Tylers
Harpenden
Herts AL5 5RT

● Mr P. Frost
Atom Users Group
18 Frankwell Drive
Potters Green
Coventry CV2 2FB

● Oivind Grenness
BBC Norway
O-Inform
PO Box 716
N3191 Horten
Norway

● **Liverpool BBC Microgroup**
c/o Fred Shaw
14 Albany Avenue
Eccleston Park
Prescot
Merseyside L34 2QW

● John Harris
Bottisham Acorn User Group
1 Rowan Close
Bottisham
Cambridge CB5 9BN
Tel: (0223) 811487

● Peter Smith
Fareham and Portchester Amateur Computer Club
23 Sandy Close
Petersfield
Hants

● Paul Barbour
Laserbug
4 Station Bridge
Woodgrange Road
London E7 0NE

● Brian Pain
Colour Micro Users Group
40a High Street
Stony Stratford
Milton Keynes
Tel: (0908) 564271

● Mr D. Coulter
Preston BBC User Group
8 Briar Grove
Ingol
Preston PR2 3UR

● **Acorn Users Group of Sweden**
c/o Janne Soderberg
Frihetsvagen 32
S-175 33 Jarfalla
Sweden

● Mr J. Craig
National BBC User Group
40 Mount Pleasant Avenue
Wells
Somerset BA5 2JQ

● Mr R. Luff
Kingbee
54 Arlington Close
Kingswinford
West Midlands

● **Computer Club**
Caterham Leisure Centre
Godstone Road
Caterham
Surrey CR3 6RE
Tel: Caterham 48304/43316

● Ted Ryan
Eastwood Town Microcomputer Club
15 Queens Square
Eastwood
Nottingham NG16 3BJ

● Mr T A Kayani
SOBAT Computer Club
B25, Berridge Road
Hillfield Road
West Hampstead
London NW6

● Mr M.G. Forster
Potbug BBC Users Group
8 St George's Avenue
High Lane
Tunstall
Stoke-on-Trent
Tel: 818499

● **Muse** (for teachers)
Freepost
Bromsgrove
Worcs B62 7BR

● Mr B. Carroll
The Cottage, 42 Manor Road
Aldershot GU11 3DG



DEALER LIST

Official Acorn dealers

Acorn dealers stock and service the BBC micro, Atom Computer, Acorn systems and Acornsoft software. The Acorn dealer not only sells computers and peripherals but

provides vital customer support. Most have recently attended technical seminars in Cambridge to ensure that they deal effectively with customers' enquiries. In addition, Acorn supply dealers with specific test and diagnostic equipment to speed fault finding.

LONDON

■ Deans of Kensington W8
01-937 7896
■ Deans of Kensington W2
01-723 4630
■ Direct Data Marketing Ltd SW1
01-834 5016/5096
■ Group 70 E18
01-505 7724
■ Jessop Microelectronics Ltd E2
01-739 3232/729 1851
■ Multi Data Services Ltd SW1
01-828 7467/9
■ Off Records SW11
01-223 7730
■ REW West End Video Centre WC2
01-240 3386/7
■ REW W1
01-580 1785
■ Technomatic Ltd NW10
01-452 1500
■ Technomatic Ltd W2
01-723 0233
■ The Video Palace W8
01-937 8587
■ Vista Video W1
01-580 9098

AVON

■ Datalink Microcomputer Systems Bristol
0272 213427/8
■ Microstyle Bath
0225-334659

BEDFORDSHIRE

■ Broadway Electronics Ltd Bedford
0234-213639

BERKSHIRE

■ Microstyle Berkshire
0635 41929
■ Windsor Computer Centre Windsor
07535-58077

CAMBRIDGESHIRE

■ Arden Personal Computers Peterborough
0733-47787
■ Cambridge Computer Store Cambridge
0223-65334
■ Control Universal Cambridge
0223-358757

CHESHIRE

■ Fairhurst Instruments Ltd Wilmslow
0625 525694
■ Marple Computer Centre Marple
061-449 9933
■ Northern Computers Warrington
0928-35110

CLEVELAND

■ Customised Electronics Ltd Middlesbrough
0642-247727

CORNWALL

■ Brewer & Bunney Camborne
0209 712681
■ Microtest Ltd Bodmin
0208 3171

DERBYSHIRE

■ Datron Micro Centre Derby
0332-380085

DEVON

■ A & D Computers Exeter
0392 55666
■ Bits & Bytes Ilfracombe
0271-62801
■ Devon Computers Paignton
0803-526303
■ J.A.D. Integrated Services Plymouth
0752 82616

DORSET

■ Landsowne Computer Centre Bournemouth
0202 20165
■ Essex Akhter Instruments Ltd Harlow
0279 412639
■ Computers for All Romford
0708-60725
■ Direct Data Marketing Ltd Brentwood
0277 229379/214168

GLOUCESTERSHIRE

■ Computer Shack EREW West End
0242 584343
■ Milequip Ltd Gloucester
0452 411010

HAMPSHIRE

■ Basingstoke Computer Centre Basingstoke
0256 52203
■ Business Electronics Southampton
0703 738248
■ Electronequip Fareham
0329 230670
■ Geophysical Systems Ltd Andover
0264 58744
■ New Forest Computer Systems Ringwood
04254 77880
■ R D S Electrical Portsmouth
0705-812478
■ R M K Electronics Ltd New Milton
0425-616110

HERTFORDSHIRE

■ Compashop Ltd New Baldet
01-441 2922
■ Computer Plus Watford
0923 33927
■ Intelligent Artifacts Ltd Royston
0233 207689
■ Q-Tek Systems Ltd Stevenage
0438 65385

HUMBERSIDE

■ Computer Facilities Scunthorpe
0724 8 63167
■ Holderness Computer Services Hull
0964 30225
■ Microserve (Humberside) Ltd Scunthorpe
0724 849696
■ The Computer Centre Hull
0482 26297
■ Vixon Computer Systems Cleethorpes
0472 58561

KENT

■ Kent Micro Computers Maidstone
0622 52784
■ Medway Computers Ltd Chatham
0634 826080/681547

LANCASHIRE

■ The Byte Shop (Manchester) Ltd
061-236 4737
■ Ment Computers Ltd Wigan
0942-495821
■ Microrose Ltd Benthams
0468 62180
■ Modern Electronics St. Annes
0253 711875
■ NSC Computing Sharncliffe Ltd Manchester
061-832 2269
■ Sweetens Computer Services Preston
0772 52443

LEICESTERSHIRE

■ D A Computers Leicester
0533 549407
■ Lincolnshire Felix Computers Boston
0205 65400

LIVERPOOL/MERSEYSIDE

■ Data Exchange Ltd Edgeware
051-647 9185

MIDDLESEX

■ Da Vinci Computer Shop 65 High Street Edgware
01-959 7119
■ Microage Electronics Edgware
01-429 1060
■ Twickenham Computer Centre Twickenham
01-891 1612
■ Twillstar Computers Ltd Southall
01-574 5271

NORFOLK

■ Anglia Computer Centre Norwich
0603 26002
■ Carlton Computers Ltd Great Yarmouth
0493 58898

NORTHAMPTONSHIRE

■ Daventry Computer Centre Daventry
03272 78058
■ Futron Computers Ltd Northampton
0604 21051

NOTTINGHAMSHIRE

■ Leasalink Viewdata Nottingham
0602 396976/399484
■ Vista Video Nottingham
0602 48400

SHROPSHIRE

■ Jentech Services Ltd Bridgnorth
07462 5287

SOMERSET

■ Somerset Business Computers Taunton
0823-52149
■ The Computer Room Yeovil
0935-20268

STAFFORDSHIRE

■ Kirklands Micro Ltd Stoke on Trent
0782 412511

SUFFOLK

■ Micro Management Ipswich
0473 59181
■ Midwich Computer Co. Ltd Rickinghall
0379 898751
■ Suffolk Computer Centre Bury St Edmunds
0264 705503

SURREY

■ Croydon Computer Centre
01-689 1280
■ Guildford Computer Centre Guildford
0483-578848
■ JS Simmet Computers Ltd Kingston upon Thames
01-546 3793
■ SD Computers Surbiton
01-337 4317
■ SD Computer Centre Sutton
01-642 2534

SUSSEX

■ Castle Electronics Hastings
0424-437875
■ Gamer Brighton
0273-698424
■ Microcentre Bognor Regis
0243 827779

TYNE AND WEAR

■ H C C S Gateshead
0632-821924
■ Newcastle Computer Services Newcastle-upon-Tyne
0632-761168

WARWICKSHIRE

■ Leamington Hobby Centre Leamington Spa
0926 29211

WEST MIDLANDS

■ The Coventry Micro Centre Coventry
0203 58942
■ Walters Computer Systems Ltd Stourbridge
03843-70811/2/3

YORKSHIRE

■ Customised Electronics Ltd Leeds
0532-792332
■ Datron Computers & Supplies Sheffield S10
0742-755105
■ Datron Micro Centre Sheffield S7
0742-585490
■ Elec. Services Ltd Bradford
0274-491371
■ GTM Word Processors Leeds
0532 865118
■ Micro Power Leeds LS7
0532-683186
■ Pennine Computers Co Ltd Halifax
0422 41719
■ Superior Systems Ltd Sheffield 1
0742-755005
■ Yorkshire Microcomputers Ltd Scarborough
0723 78136

WALES

■ Cardiff Microcomputers Cardiff
0222 373072
■ Cardigan Electronics Cardigan
0239 614483
■ Clwyd Technics Ltd Rhydymwyn, Nr. Mold
08583 766
■ KB Computers Llangollen
0891 72 651

SCOTLAND

■ Edinburgh Computer Centre Edinburgh
031-229 4416
■ Esco Computing Facilities Glasgow
041-221 0310
■ Gate Microsystems Dundee
0382 28194
■ Lorn Computer Services Oban
0631 65635
■ Pentronic Ltd Livingston
0506 410041
■ Personal Computers 'West Coast' Ayr
0292 285082
■ Silicon Centre Edinburgh
031 557 4546
■ Andrew Whyte & Son Ltd Edinburgh
031 661 2201

NORTHERN IRELAND

■ C E M Microcomputer Services Belfast
0232-44111/43564

ISLE OF MAN

■ Typestyle Ltd Onchan
0624-25890/24650

Sold out? It need never happen again

YOUR LOCAL newsagent will be pleased to keep by a copy of *Acorn User* each month to make certain you never miss it. Many newsagents even deliver the magazine straight to your door with your morning newspapers – which means you receive it as soon as possible.

To take advantage of these services, complete the coupon below (or a copy) and take it round.



To my newsagent:

- ☐ Please put by a copy of *Acorn User* magazine for me to collect each month.
- ☐ Please deliver a copy of *Acorn User* to my door each month.

Name.....

Address.....

Acorn User is distributed to the News Trade by **Magnum Distribution Ltd.** Tel: 01-583 0961.



INDEX OF ADVERTISERS

A B Designs.....	34	Eduquest.....	56	Oakleaf.....	88
Acorn Computers.....	60/61	Electronequip.....	87	Off Records.....	87
Acornsoft.....	76/77	Eltec Computers.....	36	P L Digitiser.....	37
Aimgram.....	78	Gaelsett.....	88	Portatel Conversions.....	88
A J Vision.....	39	Gemini.....	28/29	Q Tec.....	52
Amber.....	82	Golem.....	18	Remedian Instruments.....	50
Ball & Crosby.....	80	Guildford Computer Centre.....	91	Salamander.....	66
Beebug.....	41	Hargreaves, J.....	78	Schoolsoft.....	50
Bits & Bytes.....	88	Hessel, Simon W.....	73	Secta Software.....	50
Bourne Educational Software.....	50	I J K Software.....	IBC	Sir Computers.....	39
Broady, William.....	70	Ikon.....	91	Software For All.....	21
Bug-Byte Software.....	44	Intastor.....	78	Software Invasion.....	44
Busco.....	70	Kansas.....	14	Stable Software.....	34
Cabel.....	40	Lamplas.....	80	3D Computers.....	93
Cambridge Processor Services.....	26	Laserbug.....	74	Technomatic.....	4
CJE.....	70	Leaselink Viewdata.....	IFC	Twickenham Computer Centre.....	34
Computercat.....	18	Level 9.....	18	Video Palace.....	44
Computer Concepts.....	65	MicroAge.....	7/52	Watford Electronics.....	1/25
Computer Plus.....	17	MicroAid.....	93	West Coast Personal	
Control Universal.....	82	Micro Management.....	68/69	Computers.....	17
C S L Microdata.....	18	Micro Power.....	OBC		
Cumana.....	23	MicroStyle.....	9		
Digital Fantasia.....	33	Midwich.....	81		
		Newark Video Centre.....	17		

BBC MICRO

● scientific & educational applications ●

COMPLETE HARDWARE & SOFTWARE PACKAGES
FOR MODEL B BBC MICROCOMPUTER SYSTEM

Professional Joystick 35.50

Environmental Monitoring Packages
- Temperature, Illumination, Humidity etc. FROM **18.00**

100 year Clock - Calendar Unit 35.50

ALL SOFTWARE PROVIDED ON CASSETTE

manuals only available at 75p. each
refundable against package purchase

ALL PRICES INCLUDE P+P and VAT

for details of these and other products
please send s.a.s. to :-

Chris Hall Software Engineering

Department B
47 Bush Lane
Freckleton
PRESTON PR4 1SB

BBC MICRO

Cost-effective instrumentation for Home or School



Advertisers please note...

These are the copy dates of
the next three issues of Acorn User.

May issue..... March 25

June issue..... April 22

July issue..... May 20

Camera copy must be sent to:

Susie Phipps, Computer Marketplace Ltd.,
20 Orange Street, London WC2H 7ED.

Advertising rates on application.

IJK

the one to watch

MODEL A/B

Cassette 1: Star Trek/Candy Floss (very popular) **£6.50**

Cassette 2: Family Games (hours of fun) **£4.50**

Cassette 3: Mutant Invaders/Breakout **£6.50**

Cassette 8: Model A Invaders (M/C) **£5.50**

MODEL B (or A+32K)

Cassette 4: Beep-Beep (Super Simon Game) **£4.50**

Cassette 5: Beebmunch (full colour Munchman) **£6.50**

Cassette 6: Super Hangman (animated, educational) **£4.50**

Cassette 7: 3D Maze (fast and intricate) **£4.50**

CASSETTE 9

MODEL B Invaders (or A+32K) (M/C) **£7.50**

CASSETTE 10

WORDPRO. (Cassette W.P. system) **£10.50**

CASSETTE 12

FLAGS. (Countries and Capitals) **£4.50**

CASSETTE 13

HYPERDRIVE (M/C arcade). Destroy the Drone aliens in the caverns with your laser tank. **£6.50**

CASSETTE 14

STRATOBOMBER (M/C arcade). Keep the enemy fleet at bay in order to destroy the rogue star ships nuclear reactor. **£7.50**

CASSETTE 15 - LEAP FROG

The fabulous 'frogger' arcade game reaches the BBC micro. Superbly written full colour machine code version for the Model B (or A+32K). Help the frog cross the road avoiding the vehicles travelling at different speeds, and cross the multi current river to reach the safety of the lilly pads. The game gets progressively harder - perfect for arcade addicts

Only £7.50 for MODEL B (or A+32K)

CASSETTE 11

ATLANTIS. The superb fast action arcade game written in machine code to illustrate to the full the machines fantastic colour graphics and capabilities. This game includes all the usual ATLANTIS/SCRAMBLE features. Guide your submarine Nautilus along the undersea landscape and through the caverns avoiding mines, depth charges, rockets, jelly fish, serpents etc.

Only £7.50 for MODEL B (or A+32K)

BBC MICRO GAMES

- All Programs will run on all operating systems
- All software in stock before we advertise
- Send SAE for Brochure



ATLANTIS



LEAP FROG

ALL PRICES FULLY INCLUSIVE
OF VAT AND P&P -
NO MORE TO PAY!



**IJK
Software
Limited**



24 HOUR
ANSAFONE

48 hour despatch

9 King Street, Blackpool, Lancashire.
(0253) 21555

Croaker

CROAKER (B) £6.95

People — HUH!! Pity us poor Frogs!! It was tough before, just trying to hop logs over the river. Now you've built multi-lane motorways, packed with fast-moving traffic. And if we get the family safely over that little lot, you drive faster and faster and breed ever increasing numbers of crocodiles and diving turtles to make things impossible. How long will we survive the ravages of Human Expansionism?

Full feature, arcade-standard, machine code program, with excellent sound and graphics. The faster you complete each level, the more you score. One for the Connoisseur!!

SWOOP (B) £6.95 — the NEW GALAXIANS Galaxian-style, machine-code arcade game. THIRTY screaming, homing, bomb-dropping, explosive egg-laying BIRDMEN, swooping down to destroy your laser bases. Bonus bases, score & high-score, hall of fame etc.


CHESS (B) £6.95

Our excellent machine code program — now with superb MODE 1, colour graphics. Six skill levels, play black or white, illegal moves rejected, 'en passant', castling, take-back of moves, and display of player's cumulative move-time. Options include Blitz Chess where you must move in 10 seconds, set-up of positions for analysis, replay of a game just played and saving of part completed games on tape. On loading, a 1972 Spassky/Fischer game can be replayed.

LASER COMMAND (B) £6.95

Classic 'Defence of 6 Cities'. Detonate single mines or patterns to counter laser fire from alien planets. Store and recall mine patterns. Super fast, machine-code arcade game with superb graphics, sound effects, many skill levels, bonus points, etc.

LASER COMMAND

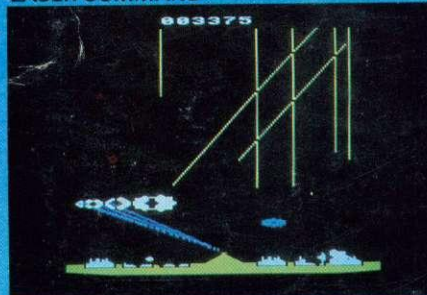


CROAKER



SWOOP



CHESS

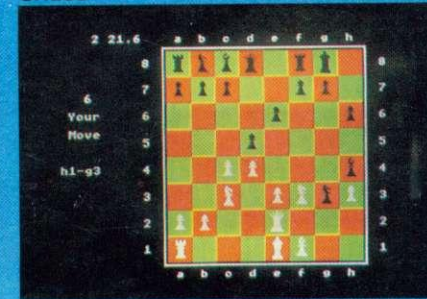

Other B.B.C. programs available: Galactic Commander (B) £6.95 Alien Destroyers (B) £6.95 Adventure £6.95 Cowboy Shoot-Out (B) £5.95 Filer £8.95/Micro Budget £6.95 World Geography (B) £5.95 Timetrek (B) £6.95/Spacemaze (B) £5.95/Martians (B) £5.95/Astro Navigator (B) £4.95/Star Trek £4.95/Munchyman £5.95/Seek £5.95/Eldorado Gold (B) £5.95/Cat & Mouse £4.95/Mastermind £3.95/Reversi 1 £4.95/Reversi 2 (B) £4.95/Roulette (B) £4.95/Gomoku £3.95/Zombies £3.95/Dissassembler £5.95/Constellation (B) £5.95/Junior Maths Pack (B) £5.95/Where?(B) £5.95

WRITTEN ANY PROGRAMS!
WE PAY 20% ROYALTIES
FOR DRAGON, SPECTRUM,
B.B.C. PROGRAMS

WE Guarantee
THAT ALL OUR ADVERTISED
PROGRAMS HAVE BEEN
COMPLETED AND ARE
READILY AVAILABLE

**WE ARE AUTHORISED DEALERS
FOR ACORN ATOM, BBC MICRO
& DRAGON 32**

SPECIAL OFFER
Deduct £1 per cassette
when ordering
two or more.

MICRO POWER LTD.
Dept. AU3
8/8a REGENT STREET,
CHAPEL ALLERTON,
LEEDS LS7 4PE
Tel: (0532) 683186 or 696343

Please add 55p order P & P + VAT at 15%

Please Note:

All programs are now available at all good
dealers or direct from MICRO POWER LTD.

